

THE FACTORY AUTOMATION COMPANY

FANUC

CNC Controls

Functions • Communication • Software



Power Motion *i*-A

CNC Series
30i/31i/32i-MODEL B Plus

CNC Series
0i-MODEL F Plus

CNC Series
35i-MODEL B

001

Table of Contents

| | |
|-------------------------------------------------------------------------|-----|
| Foreword | 020 |
| CNC..... | 021 |
| Functions..... | 022 |
| Controlled Axis..... | 023 |
| Designation of Machine Control Type..... | 024 |
| Designation of Controlled Axes..... | 025 |
| Designation of Machine Groups..... | 037 |
| Designation of Control Paths..... | 039 |
| Controllable Axes Expansion..... | 042 |
| Spindle Axes Expansion..... | 043 |
| Expansion of Servo Axes Number..... | 044 |
| Simultaneously Controlled Axes Expansion..... | 045 |
| Axis Control by PMC..... | 046 |
| Designation of Spindle Axes..... | 047 |
| Designation of Servo Axes for Spindle Use..... | 050 |
| Cs Contour Control..... | 051 |
| Loader Control Function..... | 052 |
| Addition of Loader Control Path..... | 053 |
| Peripheral Axis Control..... | 054 |
| Synchronous and Composite Control..... | 055 |
| Superimposed Control..... | 056 |
| Superimposed Control A..... | 057 |
| Superimposed Control for High-Speed Cycle Machining..... | 058 |
| Synchronous, Composite and Superimposed Control by Program Command..... | 059 |
| Flexible Path Axis Assignment..... | 061 |
| Axis Synchronous Control..... | 062 |
| Twin Table Control..... | 063 |
| Parallel Axis Control..... | 064 |
| Arbitrary Angular Axis Control..... | 066 |
| Inclined Rotary Axis Control..... | 067 |
| Pivot Axis Control..... | 068 |
| Tandem Disturbance Elimination Control..... | 069 |
| Pole Position Detection Function..... | 070 |
| Control Axis Detach..... | 071 |

002

| | |
|----------------------------------------------------------------------|-----|
| Dual Control Axes Switching..... | 072 |
| Chopping..... | 073 |
| Chopping Function by Flexible Synchronous Control..... | 074 |
| Chopping Setting Screen..... | 075 |
| High-Precision Oscillation Function..... | 076 |
| PMC Axis Control - Acceleration/Deceleration Specification Feed..... | 077 |
| Servo-On Synchronize Function..... | 078 |
| Multi-Axes Synchronous Function (Power Motion i-A)..... | 079 |
| Multi-Axes High-Response Function..... | 080 |
| Skip Function for Multi-Axes High-Response Function..... | 081 |
| Position Definition Type Synchronous Function..... | 082 |
| Pressure and Position Control Function..... | 083 |
| Position Control Keep Function..... | 084 |
| Control Function for Link Type Press..... | 085 |
| Electronic Cam Function..... | 086 |
| Increment System C..... | 087 |
| Increment System D..... | 088 |
| Increment System E..... | 089 |
| Arbitrary Command Multiply..... | 090 |
| High-Precision Learning Control A..... | 091 |
| High-Precision Learning Control B..... | 092 |
| High-Precision Learning Control C..... | 093 |
| Learning Control for Parts Cutting A..... | 094 |
| Learning Control for Parts Cutting B..... | 095 |
| Spindle Learning Control..... | 096 |
| Spindle Learning Control in High-Precision Learning Control A/B..... | 097 |
| Learning Control - Memory Expansion..... | 098 |
| Learning Memory Size 10Mbyte..... | 099 |
| Dual Position Feedback..... | 100 |
| Position Feedback Dynamic Switching Function..... | 101 |
| HRV3 Control..... | 102 |
| HRV4 Control..... | 104 |
| Inch/Metric Conversion..... | 105 |
| Stored Stroke Check 1 Area Expansion..... | 106 |
| Stroke Limit External Setting..... | 107 |

| | |
|----------------------------------------------------------------------|-----|
| Stored Stroke Check 2,3..... | 108 |
| Stored Limit Check Before Move..... | 109 |
| Stroke Limit Area Changing Function..... | 110 |
| Stored Stroke Limit Range Switching Function by Signal..... | 111 |
| OT Area Access Avoidance Function..... | 112 |
| Chuck and Tail Stock Barrier..... | 113 |
| Interference Check for Each Path..... | 114 |
| Interference Check for Rotary Area..... | 115 |
| Interference Check Function for Automatic Lathe..... | 116 |
| Built-In 3D Interference Check..... | 117 |
| 3D Interference Check with PC Function..... | 119 |
| Machining Simulation with PC Function..... | 120 |
| Unexpected Disturbance Torque Detection Function..... | 121 |
| Unexpected Disturbance Torque Detection for BETA i I/O Link..... | 122 |
| Fine Torque Sensing..... | 123 |
| Rotary Axis Control..... | 125 |
| Position Switch..... | 126 |
| High-Speed Position Switch..... | 127 |
| Direction-Dependent Type of High-Speed Position Switch..... | 128 |
| Linear Scale Interface with Absolute Address Reference Mark..... | 129 |
| Linear Scale I/F Expansion with Absolute Address Reference Mark..... | 131 |
| Temporary Absolute Coordinate Setting..... | 132 |
| Axis Immediate Stop Function..... | 133 |
| AI Feedforward..... | 135 |
| Servo Learning Oscillation..... | 136 |
| Spindle Synchronous Control for Guide Bush..... | 137 |
| Operation..... | 138 |
| Sequence Number Comparison and Stop..... | 139 |
| Program Restart..... | 140 |
| Auxiliary Function Output in Program Restart..... | 141 |
| Quick Program Restart..... | 142 |
| Restart Point Keeping of Quick Program Restart..... | 144 |
| Tool Retract and Recover..... | 145 |
| Manual Intervention and Return..... | 147 |
| Retraction for Rigid Tapping..... | 148 |

| | |
|--------------------------------------------------------------------------------------------|-----|
| Retraction for 3-Dimensional Rigid Tapping..... | 149 |
| Manual 2nd/3rd/4th Reference Position Return..... | 150 |
| Reference Point Setting with Mechanical Stopper..... | 151 |
| Reference Point Setting with Mechanical Stopper for Feed Axis Synchronization Control..... | 152 |
| Reference Point Setting with Mechanical Stopper by Grid Method..... | 153 |
| Manual Handle Feed 1 Unit..... | 154 |
| Manual Handle Feed 2/3 Units..... | 155 |
| Manual Handle Feed 4/5 Units..... | 156 |
| Manual Handle Feed - Multiple 10 Million..... | 157 |
| 3-Dimensional Manual Feed..... | 158 |
| Handle Interruption..... | 159 |
| Manual Interruption of 3-D Coordinate System Conversion..... | 160 |
| Manual Handle Interface for BETA i Series with I/O-Link..... | 161 |
| Manual Numerical Command..... | 163 |
| Reference Position Signal Output..... | 164 |
| Retrace..... | 165 |
| Manual Handle Retrace..... | 166 |
| Editing for Manual Handle Retrace..... | 167 |
| Manual Handle Retrace for Multi-Path..... | 168 |
| Direction Change Movement in Auxiliary Function Output Block Function..... | 170 |
| Manual Linear/Circular Interpolation..... | 171 |
| Reverse Motion Function for Restart..... | 172 |
| Active Block Cancel..... | 173 |
| High-Speed Program Check..... | 174 |
| Dwell / Auxiliary Function Time Override Function..... | 175 |
| Pulse Superimposed Function..... | 176 |
| NC Program Conversion Function..... | 177 |
| Interpolation Functions..... | 178 |
| Single Direction Positioning..... | 179 |
| Exponential Interpolation..... | 180 |
| Polar Coordinate Interpolation..... | 181 |
| Cylindrical Interpolation..... | 182 |
| Cylindrical Interpolation by Plane Distance Command..... | 183 |
| Helical Interpolation..... | 184 |
| Helical Interpolation B..... | 185 |

| | |
|------------------------------------------------------|-----|
| Learning Helical Interpolation..... | 186 |
| Involutes Interpolation..... | 187 |
| Helical Involute Interpolation..... | 188 |
| Hypothetical Axes Interpolation..... | 189 |
| Conical/Spiral Interpolation..... | 190 |
| Smooth Interpolation..... | 191 |
| Nano Smoothing..... | 192 |
| High-Speed and High-Quality Machining Package..... | 193 |
| Smooth Tolerance Control..... | 194 |
| Thread Cutting, Synchronous Cutting..... | 195 |
| Thread Cutting Retract..... | 196 |
| Variable Lead Thread Cutting..... | 197 |
| Circular Thread Cutting..... | 198 |
| Circular Thread Cutting B..... | 199 |
| Polygon Turning..... | 200 |
| Polygon Machining with Two Spindles..... | 201 |
| Multi-Step Skip..... | 202 |
| High-Speed Skip..... | 204 |
| 3rd/4th Reference Position Return..... | 205 |
| Floating Reference Position Return..... | 206 |
| Normal Direction Control..... | 207 |
| NURBS Interpolation..... | 208 |
| 3-Dimensional Circular Interpolation..... | 209 |
| Balanced Cutting..... | 210 |
| Index Table Indexing..... | 211 |
| Continuous High-Speed Skip..... | 212 |
| Gentle Normal Direction Control..... | 213 |
| Continuous Dressing..... | 214 |
| Infeed Control..... | 215 |
| High-Speed Cycle Machining..... | 216 |
| High-Speed Cycle Machining Retract Function..... | 217 |
| High-Speed Cycle Machining Skip Function..... | 218 |
| High-Speed Cycle Cutting Additional Variables A..... | 219 |
| High-Speed Cycle Cutting Additional Variables B..... | 220 |
| High-Speed Cycle Cutting Additional Variables C..... | 221 |

| | |
|-----------------------------------------------------------------------|-----|
| High-Speed Cycle Cutting Additional Variables D..... | 222 |
| High-Speed Cycle Cutting Additional Variables E..... | 223 |
| High-Speed Cycle Machining Operation Information Output Function..... | 224 |
| General Purpose Retract..... | 225 |
| Path Table Operation (PTO)..... | 226 |
| Spindle Speed Fluctuation Detection for Path Table Operation..... | 227 |
| Polygon Turning Function for Path Table Operation..... | 228 |
| Threading Start Position Shift Function for Path Table Operation..... | 229 |
| Tool Offset Function for Path Table Operation..... | 230 |
| Cycle Table Operation Function for Path Table Operation..... | 231 |
| Delay Time Setting Function of Auxiliary Function Output for PTO..... | 232 |
| Path Table Direct Conversion Function..... | 233 |
| High-Speed Signal Output Function for Path Table Operation..... | 234 |
| Incremental Command for Path Table Operation..... | 235 |
| Sub-Table Call for Path Table Operation..... | 236 |
| Cutting / Rapid Switching Function for Path Table Operation..... | 237 |
| Path Table Operation Execution Data Size 20Mbyte..... | 239 |
| Path Table Operation History Function..... | 240 |
| High-Speed Binary Program Operation..... | 241 |
| High-Speed Binary Program Operation on 2-Path Control..... | 242 |
| High-Speed Binary Program Operation Retract Function..... | 243 |
| Hypothetical Linear Axis Interpolation..... | 244 |
| Cross Rail Axis Control..... | 245 |
| Eccentric Turning..... | 246 |
| Path Table Operation Execution Format Data Capacity 60MB..... | 247 |
| Feed Functions..... | 248 |
| Optimum Torque Acceleration/Deceleration..... | 249 |
| Positioning by Optimum Acceleration..... | 250 |
| Bell-Shaped Acc./Dec. After Cutting Feed Interpolation..... | 251 |
| 2nd Feedrate Override..... | 252 |
| High-Speed Feedrate Override..... | 253 |
| One-Digit F-Code Feed..... | 254 |
| Inverse Time Feed..... | 255 |
| Rate Feed..... | 256 |
| External Deceleration..... | 258 |

| | |
|----------------------------------------------------------------------------------|-----|
| Feed Stop..... | 259 |
| Speed Control with Acceleration in Circular Interpolation..... | 260 |
| Advanced Preview Control..... | 261 |
| AI Contour Control I..... | 262 |
| AI Contour Control II..... | 263 |
| Look-Ahead Blocks Expansion of AICC II..... | 264 |
| Maximum Look-Ahead Blocks 400..... | 265 |
| High-Speed Processing..... | 266 |
| Look-Ahead Blocks Expansion..... | 267 |
| Jerk Control..... | 268 |
| Rigid Tapping Bell-Shaped Acceleration/Deceleration..... | 269 |
| Optimum Torque Acceleration/Deceleration for Rigid Tapping..... | 270 |
| Programmable Rapid Traverse Overlap..... | 272 |
| Feedrate Change Function..... | 273 |
| Time Constant of Acc./Dec. After Interpolation Switching Function by Signal..... | 274 |
| Smart Spindle-Load Control..... | 275 |
| In-Acceleration/Deceleration Signal..... | 277 |
| Program Input..... | 278 |
| Optional Block Skip..... | 279 |
| Dynamic Switching of Diameter/Radius Specification..... | 280 |
| Plane Conversion Function..... | 281 |
| Polar Coordinate Command..... | 282 |
| Workpiece Coordinate System..... | 283 |
| Workpiece Coordinate System Preset..... | 284 |
| Addition of Workpiece Coordinate System 48 Pairs..... | 285 |
| Addition of Workpiece Coordinate System 300 Pairs..... | 286 |
| Positioning in Machine Coordinate System with Feedrate..... | 287 |
| Direct Drawing Dimension Programming..... | 288 |
| G-Code System B/C..... | 289 |
| Lathe / Machining Center G-Code System Switching Function..... | 291 |
| Chamfering / Corner Rounding..... | 292 |
| Optional Chamfering / Corner Rounding..... | 293 |
| Custom Macro..... | 294 |
| Addition of Custom Macro Common Variables..... | 295 |
| Addition of Custom Macro Common Variables 1000..... | 296 |

| | |
|---------------------------------------------------------------------|-----|
| Custom Macro Variable Name 31 Characters..... | 297 |
| Number of Custom Macro Variable Name 1000..... | 298 |
| Number of Custom Macro Variable Name 4000..... | 299 |
| Interruption Type Custom Macro..... | 300 |
| Macro for Multi-Axes High-Response Function..... | 301 |
| Multi-Repetitive Cycles..... | 302 |
| Multi-Repetitive Cycles II..... | 303 |
| Canned Cycles for Drilling..... | 304 |
| In-Position Check Switching Function for Drilling Canned Cycle..... | 305 |
| Mirror Image for Double Turret..... | 306 |
| Automatic Corner Override..... | 308 |
| Scaling..... | 309 |
| Coordinate System Rotation..... | 310 |
| 3-Dimensional Coordinate System Conversion..... | 311 |
| Tilted Working Plane (TWP)..... | 312 |
| Programmable Mirror Image..... | 314 |
| Figure Copying..... | 315 |
| Tape Format for Series 15 CNC..... | 316 |
| Macro Executor..... | 317 |
| Extended Conversational Macro Function..... | 319 |
| Macro Executor + C-Language Executor..... | 320 |
| C Language Executor Additional SRAM..... | 322 |
| Middle-Level Task for C-Language Executor..... | 324 |
| Custom Software Size..... | 325 |
| FANUC PICTURE Executor..... | 328 |
| FANUC PICTURE Function..... | 329 |
| FANUC PICTURE Function for Series 35i-B..... | 331 |
| FANUC PICTURE Function for Power Motion i-A..... | 332 |
| Embedded Macro..... | 333 |
| Small Hole Peck Drilling Cycle..... | 334 |
| Canned Cycle for Grinding..... | 335 |
| Real Time Custom Macro..... | 336 |
| Dual Feedrate Command..... | 338 |
| Pattern Data Input..... | 339 |
| M-Code Protect Function..... | 340 |

| | |
|-----------------------------------------------------------------------|-----|
| Groove Cutting Function by Continuous Circle Movement..... | 341 |
| Extended P-Code Variables Size..... | 342 |
| Set-Up Guidance Function..... | 344 |
| Execution Macro of Measurement Cycle..... | 345 |
| Punch Tapping Function..... | 346 |
| Integrated Operation & Programming Guidance Functions..... | 347 |
| iHMI Basic Function..... | 348 |
| iHMI Set-Up Guidance..... | 349 |
| iHMI Machining Cycle..... | 350 |
| iHMI Machining Simulation Extension..... | 352 |
| iHMI Driver for IPC..... | 354 |
| iCAP T (former "iHMI Interactive Programming for Complex Lathe")..... | 355 |
| Cycle Time Estimate for iHMI..... | 357 |
| Cycle Time Estimate Library Function..... | 358 |
| MANUAL GUIDE i Basic Software..... | 359 |
| MANUAL GUIDE i Multi-Path Support..... | 361 |
| MANUAL GUIDE i Tilted Working Plane (TWP) Machining Function..... | 362 |
| MANUAL GUIDE i Windows Call Function..... | 364 |
| MANUAL GUIDE i Handle Machining Function..... | 365 |
| MANUAL GUIDE i Advanced Guidance Function..... | 366 |
| MANUAL GUIDE i Extended Axis Name Function..... | 367 |
| MANUAL GUIDE Oi..... | 369 |
| TURN MATE i Basic Software..... | 371 |
| TURN MATE i Expanded Function..... | 373 |
| TURN MATE i MDI Key Operation Function..... | 374 |
| TURN MATE i NC Program Conversion Function..... | 375 |
| TURN MATE i Expansion of Machining Cycles..... | 376 |
| Auxiliary / Spindle Speed Functions..... | 377 |
| 2nd Auxiliary Function..... | 378 |
| Auxiliary Function Output in Moving Axis..... | 379 |
| Waiting Function by Specifying Start Point..... | 380 |
| Spindle Serial Output..... | 381 |
| Spindle Analog Output..... | 382 |
| Constant Surface Speed Control..... | 383 |
| Actual Spindle Speed Output..... | 384 |

| | |
|-----------------------------------------------------------------------------------------------|-----|
| Spindle Orientation..... | 385 |
| Spindle Orientation Expansion (Extended Spindle Orientation)..... | 386 |
| Spindle Output Switching Function..... | 387 |
| Spindle Output Switching Function Expansion (Extended Spindle Output Switching Function)..... | 388 |
| Spindle Synchronous Control..... | 389 |
| Simple Spindle Synchronous Control..... | 390 |
| Multi-Spindle Control..... | 391 |
| Serial/Analog Spindle Control..... | 392 |
| Spindle Positioning..... | 393 |
| Rigid Tapping..... | 394 |
| Rigid Tapping by Manual Handle..... | 395 |
| Arbitrary Position Reference Setting for Cs Axis..... | 396 |
| M-Code Group Check Function..... | 397 |
| Spindle Speed Fluctuation Detection..... | 398 |
| Spindle Control with Servo Motor..... | 399 |
| Spindle Control with Cs Contour Control..... | 401 |
| Cs Contour Control Speed Command Switching Function..... | 402 |
| Servo/Spindle Synchronous Control..... | 403 |
| Flexible Path Spindle Assignment (Spindle Switching Function)..... | 404 |
| Spindle Control Switching Function for High-Speed Machining..... | 405 |
| Thread Start Position Compensation for Changing Spindle Speed..... | 406 |
| Arbitrary Speed Threading..... | 407 |
| Tool Functions / Tool Compensation..... | 408 |
| Tool Offset Pairs..... | 409 |
| Tool Offset Memory B..... | 412 |
| Tool Offset Memory C..... | 413 |
| Tool Offset..... | 414 |
| Tool Center Point Control..... | 415 |
| Tool Posture Control..... | 416 |
| Cutting Point Command..... | 417 |
| Smooth TCP..... | 418 |
| High-Speed Smooth TCP..... | 419 |
| Expansion of Axis Command in Tool Center Point Control..... | 420 |
| Y-Axis Offset..... | 421 |
| 4th/5th Axis Offset..... | 422 |

| | |
|------------------------------------------------------------------|-----|
| Tool Radius / Tool Nose Radius Compensation..... | 423 |
| Automatic Tool Nose Radius Compensation..... | 424 |
| 3-Dimensional Tool Compensation..... | 425 |
| Cutting Point Interpolation for Cylindrical Interpolation..... | 426 |
| Tool Geometry/Wear Compensation..... | 428 |
| 2nd Geometry Tool Offset..... | 429 |
| Customized Data Expansion..... | 430 |
| Automatic Tool Length Measurement..... | 432 |
| High-Speed Measuring Position Reach Signal Input..... | 433 |
| Tool Length / Work Zero Point Measurement..... | 434 |
| Automatic Tool Offset..... | 435 |
| Direct Input of Offset Value Measured B..... | 436 |
| Rotary Table Dynamic Fixture Offset..... | 437 |
| Wheel Wear Compensation..... | 438 |
| Changing Active Offset Value with Manual Move..... | 439 |
| Tool Length Compensation in Tool Axis Direction..... | 440 |
| 3-Dimensional Cutter Compensation..... | 441 |
| Workpiece Setting Error Compensation..... | 442 |
| Direct Input of Offset Value Measured B for 2-Spindle Lathe..... | 443 |
| Tool Life Management..... | 444 |
| Addition of Tool Pairs for Tool Life Management..... | 445 |
| Spindle Unit Compensation..... | 446 |
| Nutating Rotary Head Tool Length Compensation..... | 447 |
| Automatic Alteration of Tool Position Compensation..... | 448 |
| Tool Offset for Milling and Turning Function..... | 449 |
| Tool Offset Conversion Function..... | 451 |
| Tool Geometry Size Data..... | 452 |
| Tool Geometry Size Data - Additional Tool Type..... | 454 |
| Tool Management Function..... | 455 |
| Tool Pairs for Tool Management Function..... | 456 |
| Tool Attachment/Detachment Management Function..... | 458 |
| Tool Management Expansion..... | 459 |
| Tool Management Expansion B..... | 460 |
| Tool Management Function for Multi-Edge Tools..... | 461 |
| Accuracy Compensation Functions..... | 462 |

| | |
|-----------------------------------------------------------------------|-----|
| Stored Pitch Error Compensation..... | 463 |
| Interpolation Type Pitch Error Compensation..... | 464 |
| Bi-Directional Pitch Error Compensation..... | 465 |
| Extended Bi-Directional Pitch Error Compensation..... | 466 |
| Periodical Secondary Pitch Error Compensation..... | 467 |
| Inclination Compensation..... | 469 |
| Straightness Compensation..... | 471 |
| Interpolation Type Straightness Compensation..... | 473 |
| Interpolated Straightness Compensation 3072 Points..... | 474 |
| 3-Dimensional Error Compensation..... | 475 |
| Thermal Growth Compensation Along Tool Vector..... | 476 |
| Linear Inclination Compensation Function..... | 477 |
| 3-Dimensional Machine Position Compensation..... | 478 |
| 3-Dimensional Rotary Error Compensation..... | 479 |
| AI Thermal Displacement Compensation..... | 480 |
| Hobbing / Electronic Gear Box..... | 481 |
| Electronic Gear Box (EGB)..... | 482 |
| Skip Function for Electronic Gear Box (EGB) Axis..... | 483 |
| Electronic Gear Box (EGB) - 2 pairs..... | 484 |
| Electronic Gear Box (EGB) Automatic Phase Synchronization..... | 485 |
| Spindle Electronic Gear Box (EGB)..... | 486 |
| Flexible Synchronous Control..... | 488 |
| Automatic Phase Synchronization for Flexible Synchronous Control..... | 490 |
| Inter-Path Flexible Synchronization Control..... | 491 |
| Skip Function for Flexible Synchronization Control..... | 492 |
| Hob Command by Flexible Synchronous Control..... | 493 |
| U-Axis Control 2 Pairs..... | 494 |
| Grinding Functions..... | 495 |
| Punch Press Functions..... | 496 |
| C-Axis Control..... | 497 |
| T- and C-Axes Simultaneous Control..... | 499 |
| Safety Zone Check..... | 500 |
| Safety Zone Area Expansion..... | 501 |
| Clamp Zone Avoidance Function..... | 502 |
| RAM-Axis Control..... | 503 |

| | |
|----------------------------------------------------------------|-----|
| Program Auto Restart..... | 504 |
| Linear/Circular Punch Command..... | 505 |
| Y-Axis Crack Cancel..... | 506 |
| Multi-Piece Machining..... | 507 |
| Multi-Piece Machining End Area Command..... | 508 |
| Tool Data Setting Function..... | 509 |
| Multiple Tool Control..... | 510 |
| Tool Life Management..... | 511 |
| High Speed Press Function..... | 512 |
| Laser Functions..... | 513 |
| Standard Laser Functions..... | 514 |
| Laser Control Function..... | 515 |
| Cutting Condition Setting Function..... | 516 |
| Addition of Cutting Condition Data..... | 517 |
| Edge Cutting Function..... | 518 |
| Minimum Command 1% Duty Override..... | 519 |
| Laser High-Speed Control Function 2..... | 520 |
| Laser Oscillator Communication Control (HSSB Connection)..... | 521 |
| Laser Oscillator Communication Control (FSSB Connection)..... | 522 |
| Gap Control for Laser..... | 523 |
| Automatic Gap Control Axis Retract & Approaching Function..... | 524 |
| Program Auto Restart..... | 525 |
| Cutting Restart..... | 526 |
| Multi-Piece Machining..... | 527 |
| Multi-Piece Machining End Area Command..... | 528 |
| Buffer Expansion..... | 529 |
| Punch Press Function for Compound Cutting..... | 530 |
| Attitude Control..... | 531 |
| Interaction Control..... | 532 |
| W-Axis Gap Control..... | 533 |
| Bevel Cutting Compensation Function..... | 534 |
| Proximity Point Search..... | 535 |
| Spatial Corner Rounding..... | 536 |
| Two Laser Control Function..... | 537 |
| Laser Data Log Output..... | 538 |

| | |
|-------------------------------------------------------|-----|
| Laser Machining Package..... | 539 |
| Laser Trend Function..... | 540 |
| Gas Cutting Machine Functions..... | 541 |
| Functions for Gas Cutting Machine..... | 542 |
| Automatic Exact Stop Check..... | 543 |
| Torch Swing for Gas Cutting Machine..... | 544 |
| Gentle Curve Cutting..... | 545 |
| Corner Control by Feedrate..... | 546 |
| Tool Offset B..... | 547 |
| Gap Control..... | 548 |
| Editing Operation..... | 549 |
| Part Program Storage Size..... | 550 |
| Number of Registerable Programs Expansion..... | 552 |
| Key and Program Encryption..... | 554 |
| Playback..... | 555 |
| Machining Time Stamp..... | 556 |
| Background Editing..... | 557 |
| Memory Card Program Entry Count Extension..... | 558 |
| Template Program Function..... | 559 |
| Multi-Path Editing Function..... | 561 |
| High-Speed Program Management..... | 562 |
| Multi-Path Program Management Function..... | 563 |
| Program Operation on Large Capacity Memory..... | 564 |
| Setting and Display..... | 565 |
| Run Hour and Parts Count Display..... | 566 |
| Machine Alarm Diagnosis..... | 567 |
| Servo/Spindle Waveform Data Output Function..... | 569 |
| Software Operator's Panel..... | 570 |
| Software Operator's Panel General Purpose Switch..... | 571 |
| Machine Operation Menu..... | 572 |
| FANUC Auto HMI-NC..... | 574 |
| FANUC Auto HMI-NC Screen Enhancement 1..... | 576 |
| Multi-Language Display..... | 578 |
| Selection of Five Optional Languages..... | 586 |
| Protection of Data at Eight Levels..... | 587 |

| | |
|--------------------------------------------------------|-----|
| Personal Authentication Function..... | 588 |
| CNC Lock Function..... | 589 |
| Machining Condition Selecting Function..... | 590 |
| Machining Quality Level Adjustment..... | 591 |
| Graphic Function..... | 592 |
| Dynamic Graphic Display Function..... | 593 |
| Touch Panel Control..... | 594 |
| External Touch Panel Interface..... | 595 |
| Two Touch Panels Control for Stand-Alone Type CNC..... | 596 |
| Virtual MDI Key..... | 597 |
| Ethernet Display Function..... | 598 |
| Ethernet Display Sharing Function..... | 599 |
| Twin Display Function with Ethernet..... | 600 |
| CNC Screen Dual Display Function..... | 601 |
| CNC Screen Display for 19" LCD..... | 602 |
| Enlarged CNC Screen Display for 19" LCD..... | 603 |
| CNC Screen Web Server Function..... | 604 |
| Energy Saving Level Selection Function..... | 605 |
| Machine State Monitoring Function..... | 607 |
| Machine Configuration Selecting Function..... | 608 |
| 5-Axis Machining Condition Setting Function..... | 609 |
| Main Menu Screen Customizing Function..... | 610 |
| Warning Function Against Modification of Setting..... | 612 |
| MDI Reset Key Invalidation..... | 613 |
| Machine Setting Switching Function..... | 614 |
| Error Compensation Data Protection Function..... | 615 |
| Data Input/Output..... | 616 |
| RS232C Interface..... | 617 |
| RS232C Interface Expansion of Receiving Buffer..... | 618 |
| Fast Data Server..... | 619 |
| Data Server Explorer Connection..... | 620 |
| External Tool Offset..... | 621 |
| External Machine Zero Point Shift..... | 622 |
| External Message..... | 623 |
| External Data Input..... | 624 |

| | |
|---------------------------------------------------------------|-----|
| Power Mate CNC Manager..... | 625 |
| External I/O Device Control..... | 626 |
| One Touch Macro Call..... | 627 |
| Automatic Data Backup..... | 628 |
| Continuous Positional Data Output Function..... | 630 |
| PMC System..... | 631 |
| PMC Ladder Function..... | 632 |
| Multi-Path PMC Function..... | 635 |
| PMC Symbol, Comment and Message Capacity Expansion..... | 637 |
| Step Sequence Function..... | 639 |
| Nonvolatile PMC Extra Relay Function..... | 642 |
| Nonvolatile PMC Data Table Area Expansion (40kB)..... | 643 |
| PMC Function Block Function..... | 644 |
| Machine Safety Functions..... | 645 |
| Dual Check Safety (DCS)..... | 646 |
| Safety I/O Signal History Function..... | 648 |
| Safety Spindle Speed Limit Override..... | 649 |
| Test Mode Function for Dual Check Safety Acceptance Test..... | 650 |
| Option Packages and Kits..... | 652 |
| Basic Option..... | 653 |
| Turning Package 1..... | 655 |
| Turning Package 2..... | 656 |
| Milling Standard Package..... | 657 |
| Milling Package..... | 659 |
| Grinding Package..... | 661 |
| Gear Cutting Package..... | 662 |
| Multi-Path Kit..... | 663 |
| TWP Kit..... | 664 |
| 5-Axis Kit..... | 665 |
| iHMI Kit..... | 666 |
| Full Closed Kit..... | 667 |
| Tandem Kit..... | 668 |
| Rotary Table Kit..... | 669 |
| Live Tool Kit..... | 670 |
| Interface Functions..... | 671 |

| | |
|----------------------------------------------------|-----|
| CNC Status Notification Function..... | 672 |
| Communication..... | 673 |
| Embedded Ethernet..... | 674 |
| Fast Ethernet..... | 675 |
| PROFINET IO..... | 677 |
| PROFINET IO Controller..... | 678 |
| PROFINET IO Controller 2..... | 680 |
| PROFINET IO Controller Safety Function..... | 682 |
| PROFINET IO Device..... | 683 |
| PROFINET IO Device Safety Function..... | 685 |
| PROFIBUS-DP..... | 686 |
| PROFIBUS-DP Slave..... | 687 |
| PROFIBUS-DP Master..... | 689 |
| EtherNet/IP..... | 691 |
| EtherNet/IP Adapter..... | 692 |
| EtherNet/IP Adapter Safety Function..... | 694 |
| EtherNet/IP Scanner..... | 695 |
| DeviceNet..... | 697 |
| DeviceNet Scanner (Master)..... | 698 |
| DeviceNet Adapter (Slave)..... | 700 |
| FL-net..... | 702 |
| FL-net Safety..... | 704 |
| CC-Link..... | 706 |
| CC-Link Remote Device..... | 707 |
| CC-Link IE Field..... | 709 |
| QSSR CONNECT..... | 710 |
| High Speed Serial Bus (HSSB)..... | 711 |
| Robot Connection Function..... | 713 |
| Modbus/TCP Server..... | 715 |
| MTConnect Server Function..... | 717 |
| Inter-Unit Synchronization (Power Motion i-A)..... | 718 |
| QSSR G-CODE..... | 719 |
| Software FA..... | 720 |
| PC Software..... | 721 |

| | |
|-------------------------------------------------|-----|
| iHMI..... | 722 |
| iHMI Application SDK for PANEL iH..... | 723 |
| CNC Application Development Kit..... | 724 |
| CNC GUIDE..... | 725 |
| Cycle Time Estimate Function for CNC GUIDE..... | 726 |
| CNC GUIDE Academic Package..... | 728 |
| FANUC PICTURE..... | 729 |
| FANUC LADDER-III..... | 730 |
| LADDER Editing Package..... | 732 |
| CNC Startup Tool..... | 733 |
| CNC Setting Tool..... | 734 |
| CNC Parameter Setting Tool..... | 735 |
| EtherNet/IP Setting Tool..... | 736 |
| FL-net Setting Tool..... | 737 |
| PROFIBUS Setting Tool..... | 738 |
| PROFINET Configuration Tool..... | 739 |
| CNC Data Management Tool..... | 740 |
| Acceptance Test Assist Tool..... | 741 |
| FANUC SERVO GUIDE..... | 742 |
| SERVO Viewer..... | 744 |
| SERVO SIZER..... | 745 |
| Program Transfer Tool..... | 746 |
| Active G-Code Checker..... | 747 |
| Interactive Programming..... | 748 |
| iCAP T for PC..... | 749 |
| C-Language Library for C-Language Executor..... | 750 |
| CNC Screen Display Function (SDF)..... | 751 |
| Electronic Cam Support Tool..... | 752 |
| FOCAS Library..... | 753 |
| Guidance Table for Machine Alarm Diagnosis..... | 754 |
| Machine Operation Menu Making Tool..... | 755 |
| Machining Status Monitor Package Disk..... | 756 |
| Main Menu Screen Customization Tool..... | 757 |
| Operation History Converter Tool..... | 758 |
| MACRO Compiler..... | 759 |

| | |
|------------------------------------------------------------------|-----|
| FANUC Auto HMI/T and Auto HMI-NC..... | 760 |
| 3D Error Compensation Setting Tool..... | 761 |
| Built-In 3D Interference Check Setting Tool..... | 762 |
| FANUC Connect..... | 763 |
| FANUC Customize Assist..... | 764 |
| Machine Remote Diagnosis Package..... | 765 |
| MT-LINKi - CNC Data Collection Software for PC..... | 767 |
| OPC Server..... | 768 |
| MTConnect Server..... | 769 |
| Parameter Conversion Support Tool..... | 770 |
| AI Thermal Displacement Compensation Model Development Tool..... | 771 |
| CNC Lock Setting Data Preparation Tool..... | 772 |
| Windows Embedded SDK..... | 773 |
| PC Tool for Memory Card Program Operation/Editing..... | 774 |
| Cycle Time Estimate Function..... | 775 |
| Basic Operation Package 2..... | 776 |

Datasheets.....

Foreword

You will find in this catalog an extensive selection of essential product information about FANUC components, functions and software. There are many FANUC products available to help you build the most competitive machine or automated system. This catalog contains a lot of information but cannot cover all subjects extensively; use it as a guide and do not hesitate to call your local FANUC representative for further information and assistance.

About controller functions

The descriptions of each function provided in this catalogue may contain information, descriptions, technical data as well as performance data which may not always apply as described. Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. The functions described are options and may not be installed on a given configuration. It is however mostly possible to purchase additional functions and hardware to retrofit an existing system to increase its productivity. In case of doubt or if you need additional information on functions, compatibility and retrofit, contact your FANUC representative.

Export control

The products listed in this catalogue may be subject to export control laws and regulations of Japan, the United States of America, the European Union, its Member States and any amendments thereof. Contact your FANUC representative for further information.

Notes

The illustrations, charts, sample programs and layout examples shown in this catalogue are intended solely for purposes of example. Availability and technical specifications are subject to change without notice.

Copyrights

Trademarks referenced herein are either owned by FANUC or are used solely for purposes of identifying compatibility with the products of FANUC and are owned by their respective companies. Copyright © 2021 FANUC Europe Corporation, 7 rue Benedikt Zender, L-6468 Echternach, Grand-Duché de Luxembourg. All rights reserved.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

021

CNC

FANUC develops and manufactures state-of-the-art automation products and solutions. The CNC product range includes both entry-level and complex CNC products with high-speed functions, digitally controlled servo motors and spindle motors, and user-friendly operator interfaces.

The FANUC CNC system is installed in the machine in the form of a productive CNC package complete with CNC, amplifier, motors, I/O modules and operator panel. Such a complete CNC concept promises that the components are coordinated to optimum effect, offering the highest performance and productivity.



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.


The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

022

CNC

Functions

This section of the catalogue describes functions provided by the CNC software. They have been grouped by relevance to provide a better overview.

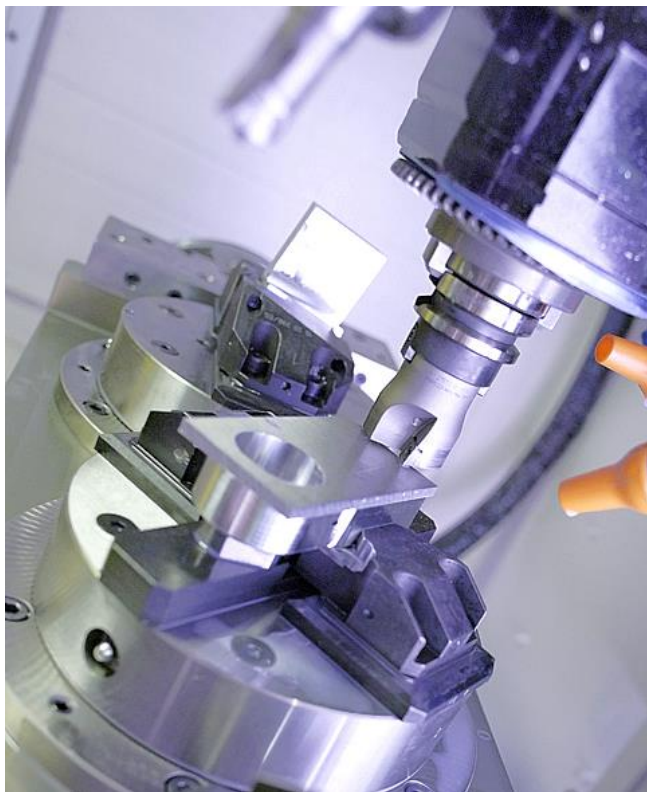

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

023

Functions

Controlled Axis

This section of the catalogue contains the functions related to axis control in the CNC, from the number of axes, paths and axes groups, via many other synchronization and precision and safety functions.

Some of the functions detailed in the catalogue:

- Designation of controlled axes, machine groups, path and technology
- Cs contouring control
- Synchronous / Composite control
- Tandem control
- Chopping
- High precision learning control
- HRV Control
- Interference check functions
- Built-in 3D interference check
- Unexpected disturbance torque detection function
- Dual Check Safety (DCS)
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

024

Controlled Axis

Designation of Machine Control Type

This function defines the machine type as controlled by the CNC. It can be chosen between Machining Center, Lathe or Multiple System, i.e. combination of Lathe and Machining Center functions.

Ordering Information

| Specification | Description |
|------------------|----------------------------------------------------------------------------------------------------------------------------|
| A02B-0323-S838#C | 30i-B Designation of Machine Control Type, Multiple System - Selection of either Machining Center and Lathe for each Path |
| A02B-0323-S838#M | 30i-B Designation of Machine Control Type, Machining Center |
| A02B-0323-S838#T | 30i-B Designation of Machine Control Type, Lathe |
| A02B-0326-S838#C | 31i-B5 Designation of Machine Control Type, Multiple System - Selection of either Machining Center and Lathe for each Path |
| A02B-0326-S838#M | 31i-B5 Designation of Machine Control Type, Machining Center |
| A02B-0326-S838#T | 31i-B5 Designation of Machine Control Type, Lathe |
| A02B-0327-S838#C | 31i-B Designation of Machine Control Type, Multiple System - Selection of either Machining Center and Lathe for each Path |
| A02B-0327-S838#M | 31i-B Designation of Machine Control Type, Machining Center |
| A02B-0327-S838#T | 31i-B Designation of Machine Control Type, Lathe |
| A02B-0328-S838#C | 32i-B Designation of Machine Control Type, Multiple System - Selection of either Machining Center and Lathe for each Path |
| A02B-0328-S838#M | 32i-B Designation of Machine Control Type, Machining Center |
| A02B-0328-S838#T | 32i-B Designation of Machine Control Type, Lathe |
| A02B-0353-S838#C | 30i-BP Designation of Machine Control Type - Multiple System (Compound Machining) |
| A02B-0353-S838#M | 30i-BP Designation of Machine Control Type - Machining Center System |
| A02B-0353-S838#T | 30i-BP Designation of Machine Control Type - Lathe System |
| A02B-0356-S838#C | 31i-B5P Designation of Machine Control Type - Multiple System (Compound Machining) |
| A02B-0356-S838#M | 31i-B5P Designation of Machine Control Type - Machining Center System |
| A02B-0356-S838#T | 31i-B5P Designation of Machine Control Type - Lathe System |
| A02B-0357-S838#C | 31i-BP Designation of Machine Control Type - Multiple System (Compound Machining) |
| A02B-0357-S838#M | 31i-BP Designation of Machine Control Type - Machining Center System |
| A02B-0357-S838#T | 31i-BP Designation of Machine Control Type - Lathe System |
| A02B-0358-S838#C | 32i-BP Designation of Machine Control Type - Multiple System (Compound Machining) |
| A02B-0358-S838#M | 32i-BP Designation of Machine Control Type - Machining Center System |
| A02B-0358-S838#T | 32i-BP Designation of Machine Control Type - Lathe System |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

025

Controlled Axis

Designation of Controlled Axes

This function specifies the maximum number of axes that the CNC can control. The number of maximum controlled axes is the sum of the number of machine controlled axes and the number of loader controlled axes.

The number of Cs and PMC axes is included in the number of machine controlled axes.

The maximum number of axes is also linked to the hardware configuration of the CNC.

Ordering Information

| Specification | Description |
|-------------------|----------------------------------------------|
| A02B-0323-J802#1 | 30i-B Designation of Number of Axes, 1 Axis |
| A02B-0323-J802#10 | 30i-B Designation of Number of Axes, 10 Axes |
| A02B-0323-J802#11 | 30i-B Designation of Number of Axes, 11 Axes |
| A02B-0323-J802#12 | 30i-B Designation of Number of Axes, 12 Axes |
| A02B-0323-J802#13 | 30i-B Designation of Number of Axes, 13 Axes |
| A02B-0323-J802#14 | 30i-B Designation of Number of Axes, 14 Axes |
| A02B-0323-J802#15 | 30i-B Designation of Number of Axes, 15 Axes |
| A02B-0323-J802#16 | 30i-B Designation of Number of Axes, 16 Axes |
| A02B-0323-J802#17 | 30i-B Designation of Number of Axes, 17 Axes |
| A02B-0323-J802#18 | 30i-B Designation of Number of Axes, 18 Axes |
| A02B-0323-J802#19 | 30i-B Designation of Number of Axes, 19 Axes |
| A02B-0323-J802#2 | 30i-B Designation of Number of Axes, 2 Axes |
| A02B-0323-J802#20 | 30i-B Designation of Number of Axes, 20 Axes |
| A02B-0323-J802#21 | 30i-B Designation of Number of Axes, 21 Axes |
| A02B-0323-J802#22 | 30i-B Designation of Number of Axes, 22 Axes |
| A02B-0323-J802#23 | 30i-B Designation of Number of Axes, 23 Axes |
| A02B-0323-J802#24 | 30i-B Designation of Number of Axes, 24 Axes |
| A02B-0323-J802#25 | 30i-B Designation of Number of Axes, 25 Axes |
| A02B-0323-J802#26 | 30i-B Designation of Number of Axes, 26 Axes |
| A02B-0323-J802#27 | 30i-B Designation of Number of Axes, 27 Axes |
| A02B-0323-J802#28 | 30i-B Designation of Number of Axes, 28 Axes |
| A02B-0323-J802#29 | 30i-B Designation of Number of Axes, 29 Axes |
| A02B-0323-J802#3 | 30i-B Designation of Number of Axes, 3 Axes |
| A02B-0323-J802#30 | 30i-B Designation of Number of Axes, 30 Axes |
| A02B-0323-J802#31 | 30i-B Designation of Number of Axes, 31 Axes |
| A02B-0323-J802#32 | 30i-B Designation of Number of Axes, 32 Axes |
| A02B-0323-J802#33 | 30i-B Designation of Number of Axes, 33 Axes |
| A02B-0323-J802#34 | 30i-B Designation of Number of Axes, 34 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|----------------------------------------------|
| A02B-0323-J802#35 | 30i-B Designation of Number of Axes, 35 Axes |
| A02B-0323-J802#36 | 30i-B Designation of Number of Axes, 36 Axes |
| A02B-0323-J802#37 | 30i-B Designation of Number of Axes, 37 Axes |
| A02B-0323-J802#38 | 30i-B Designation of Number of Axes, 38 Axes |
| A02B-0323-J802#39 | 30i-B Designation of Number of Axes, 39 Axes |
| A02B-0323-J802#4 | 30i-B Designation of Number of Axes, 4 Axes |
| A02B-0323-J802#40 | 30i-B Designation of Number of Axes, 40 Axes |
| A02B-0323-J802#41 | 30i-B Designation of Number of Axes, 41 Axes |
| A02B-0323-J802#42 | 30i-B Designation of Number of Axes, 42 Axes |
| A02B-0323-J802#43 | 30i-B Designation of Number of Axes, 43 Axes |
| A02B-0323-J802#44 | 30i-B Designation of Number of Axes, 44 Axes |
| A02B-0323-J802#45 | 30i-B Designation of Number of Axes, 45 Axes |
| A02B-0323-J802#46 | 30i-B Designation of Number of Axes, 46 Axes |
| A02B-0323-J802#47 | 30i-B Designation of Number of Axes, 47 Axes |
| A02B-0323-J802#48 | 30i-B Designation of Number of Axes, 48 Axes |
| A02B-0323-J802#49 | 30i-B Designation of Number of Axes, 49 Axes |
| A02B-0323-J802#5 | 30i-B Designation of Number of Axes, 5 Axes |
| A02B-0323-J802#50 | 30i-B Designation of Number of Axes, 50 Axes |
| A02B-0323-J802#51 | 30i-B Designation of Number of Axes, 51 Axes |
| A02B-0323-J802#52 | 30i-B Designation of Number of Axes, 52 Axes |
| A02B-0323-J802#53 | 30i-B Designation of Number of Axes, 53 Axes |
| A02B-0323-J802#54 | 30i-B Designation of Number of Axes, 54 Axes |
| A02B-0323-J802#55 | 30i-B Designation of Number of Axes, 55 Axes |
| A02B-0323-J802#56 | 30i-B Designation of Number of Axes, 56 Axes |
| A02B-0323-J802#57 | 30i-B Designation of Number of Axes, 57 Axes |
| A02B-0323-J802#58 | 30i-B Designation of Number of Axes, 58 Axes |
| A02B-0323-J802#59 | 30i-B Designation of Number of Axes, 59 Axes |
| A02B-0323-J802#6 | 30i-B Designation of Number of Axes, 6 Axes |
| A02B-0323-J802#60 | 30i-B Designation of Number of Axes, 60 Axes |
| A02B-0323-J802#61 | 30i-B Designation of Number of Axes, 61 Axes |
| A02B-0323-J802#62 | 30i-B Designation of Number of Axes, 62 Axes |
| A02B-0323-J802#63 | 30i-B Designation of Number of Axes, 63 Axes |
| A02B-0323-J802#64 | 30i-B Designation of Number of Axes, 64 Axes |
| A02B-0323-J802#65 | 30i-B Designation of Number of Axes, 65 Axes |
| A02B-0323-J802#66 | 30i-B Designation of Number of Axes, 66 Axes |
| A02B-0323-J802#67 | 30i-B Designation of Number of Axes, 67 Axes |
| A02B-0323-J802#68 | 30i-B Designation of Number of Axes, 68 Axes |
| A02B-0323-J802#69 | 30i-B Designation of Number of Axes, 69 Axes |
| A02B-0323-J802#7 | 30i-B Designation of Number of Axes, 7 Axes |
| A02B-0323-J802#70 | 30i-B Designation of Number of Axes, 70 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0323-J802#71 | 30i-B Designation of Number of Axes, 71 Axes |
| A02B-0323-J802#72 | 30i-B Designation of Number of Axes, 72 Axes |
| A02B-0323-J802#73 | 30i-B Designation of Number of Axes, 73 Axes |
| A02B-0323-J802#74 | 30i-B Designation of Number of Axes, 74 Axes |
| A02B-0323-J802#75 | 30i-B Designation of Number of Axes, 75 Axes |
| A02B-0323-J802#76 | 30i-B Designation of Number of Axes, 76 Axes |
| A02B-0323-J802#77 | 30i-B Designation of Number of Axes, 77 Axes |
| A02B-0323-J802#78 | 30i-B Designation of Number of Axes, 78 Axes |
| A02B-0323-J802#79 | 30i-B Designation of Number of Axes, 79 Axes |
| A02B-0323-J802#8 | 30i-B Designation of Number of Axes, 8 Axes |
| A02B-0323-J802#80 | 30i-B Designation of Number of Axes, 80 Axes |
| A02B-0323-J802#81 | 30i-B Designation of Number of Axes, 81 Axes |
| A02B-0323-J802#82 | 30i-B Designation of Number of Axes, 82 Axes |
| A02B-0323-J802#83 | 30i-B Designation of Number of Axes, 83 Axes |
| A02B-0323-J802#84 | 30i-B Designation of Number of Axes, 84 Axes |
| A02B-0323-J802#85 | 30i-B Designation of Number of Axes, 85 Axes |
| A02B-0323-J802#86 | 30i-B Designation of Number of Axes, 86 Axes |
| A02B-0323-J802#87 | 30i-B Designation of Number of Axes, 87 Axes |
| A02B-0323-J802#88 | 30i-B Designation of Number of Axes, 88 Axes |
| A02B-0323-J802#89 | 30i-B Designation of Number of Axes, 89 Axes |
| A02B-0323-J802#9 | 30i-B Designation of Number of Axes, 9 Axes |
| A02B-0323-J802#90 | 30i-B Designation of Number of Axes, 90 Axes |
| A02B-0323-J802#91 | 30i-B Designation of Number of Axes, 91 Axes |
| A02B-0323-J802#92 | 30i-B Designation of Number of Axes, 92 Axes |
| A02B-0323-J802#93 | 30i-B Designation of Number of Axes, 93 Axes |
| A02B-0323-J802#94 | 30i-B Designation of Number of Axes, 94 Axes |
| A02B-0323-J802#95 | 30i-B Designation of Number of Axes, 95 Axes |
| A02B-0323-J802#96 | 30i-B Designation of Number of Axes, 96 Axes |
| A02B-0326-J802#1 | 31i-B5 Designation of Number of Axes, 1 Axis |
| A02B-0326-J802#10 | 31i-B5 Designation of Number of Axes, 10 Axes |
| A02B-0326-J802#11 | 31i-B5 Designation of Number of Axes, 11 Axes |
| A02B-0326-J802#12 | 31i-B5 Designation of Number of Axes, 12 Axes |
| A02B-0326-J802#13 | 31i-B5 Designation of Number of Axes, 13 Axes |
| A02B-0326-J802#14 | 31i-B5 Designation of Number of Axes, 14 Axes |
| A02B-0326-J802#15 | 31i-B5 Designation of Number of Axes, 15 Axes |
| A02B-0326-J802#16 | 31i-B5 Designation of Number of Axes, 16 Axes |
| A02B-0326-J802#17 | 31i-B5 Designation of Number of Axes, 17 Axes |
| A02B-0326-J802#18 | 31i-B5 Designation of Number of Axes, 18 Axes |
| A02B-0326-J802#19 | 31i-B5 Designation of Number of Axes, 19 Axes |
| A02B-0326-J802#2 | 31i-B5 Designation of Number of Axes, 2 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0326-J802#20 | 31i-B5 Designation of Number of Axes, 20 Axes |
| A02B-0326-J802#21 | 31i-B5 Designation of Number of Axes, 21 Axes |
| A02B-0326-J802#22 | 31i-B5 Designation of Number of Axes, 22 Axes |
| A02B-0326-J802#23 | 31i-B5 Designation of Number of Axes, 23 Axes |
| A02B-0326-J802#24 | 31i-B5 Designation of Number of Axes, 24 Axes |
| A02B-0326-J802#25 | 31i-B5 Designation of Number of Axes, 25 Axes |
| A02B-0326-J802#26 | 31i-B5 Designation of Number of Axes, 26 Axes |
| A02B-0326-J802#3 | 31i-B5 Designation of Number of Axes, 3 Axes |
| A02B-0326-J802#4 | 31i-B5 Designation of Number of Axes, 4 Axes |
| A02B-0326-J802#5 | 31i-B5 Designation of Number of Axes, 5 Axes |
| A02B-0326-J802#6 | 31i-B5 Designation of Number of Axes, 6 Axes |
| A02B-0326-J802#7 | 31i-B5 Designation of Number of Axes, 7 Axes |
| A02B-0326-J802#8 | 31i-B5 Designation of Number of Axes, 8 Axes |
| A02B-0326-J802#9 | 31i-B5 Designation of Number of Axes, 9 Axes |
| A02B-0327-J802#1 | 31i-B Designation of Number of Axes, 1 Axis |
| A02B-0327-J802#10 | 31i-B Designation of Number of Axes, 10 Axes |
| A02B-0327-J802#11 | 31i-B Designation of Number of Axes, 11 Axes |
| A02B-0327-J802#12 | 31i-B Designation of Number of Axes, 12 Axes |
| A02B-0327-J802#13 | 31i-B Designation of Number of Axes, 13 Axes |
| A02B-0327-J802#14 | 31i-B Designation of Number of Axes, 14 Axes |
| A02B-0327-J802#15 | 31i-B Designation of Number of Axes, 15 Axes |
| A02B-0327-J802#16 | 31i-B Designation of Number of Axes, 16 Axes |
| A02B-0327-J802#17 | 31i-B Designation of Number of Axes, 17 Axes |
| A02B-0327-J802#18 | 31i-B Designation of Number of Axes, 18 Axes |
| A02B-0327-J802#19 | 31i-B Designation of Number of Axes, 19 Axes |
| A02B-0327-J802#2 | 31i-B Designation of Number of Axes, 2 Axes |
| A02B-0327-J802#20 | 31i-B Designation of Number of Axes, 20 Axes |
| A02B-0327-J802#21 | 31i-B Designation of Number of Axes, 21 Axes |
| A02B-0327-J802#22 | 31i-B Designation of Number of Axes, 22 Axes |
| A02B-0327-J802#23 | 31i-B Designation of Number of Axes, 23 Axes |
| A02B-0327-J802#24 | 31i-B Designation of Number of Axes, 24 Axes |
| A02B-0327-J802#25 | 31i-B Designation of Number of Axes, 25 Axes |
| A02B-0327-J802#26 | 31i-B Designation of Number of Axes, 26 Axes |
| A02B-0327-J802#3 | 31i-B Designation of Number of Axes, 3 Axes |
| A02B-0327-J802#4 | 31i-B Designation of Number of Axes, 4 Axes |
| A02B-0327-J802#5 | 31i-B Designation of Number of Axes, 5 Axes |
| A02B-0327-J802#6 | 31i-B Designation of Number of Axes, 6 Axes |
| A02B-0327-J802#7 | 31i-B Designation of Number of Axes, 7 Axes |
| A02B-0327-J802#8 | 31i-B Designation of Number of Axes, 8 Axes |
| A02B-0327-J802#9 | 31i-B Designation of Number of Axes, 9 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0328-J802#1 | 32i-B Designation of Number of Axes, 1 Axis |
| A02B-0328-J802#10 | 32i-B Designation of Number of Axes, 10 Axes |
| A02B-0328-J802#11 | 32i-B Designation of Number of Axes, 11 Axes |
| A02B-0328-J802#12 | 32i-B Designation of Number of Axes, 12 Axes |
| A02B-0328-J802#13 | 32i-B Designation of Number of Axes, 13 Axes |
| A02B-0328-J802#14 | 32i-B Designation of Number of Axes, 14 Axes |
| A02B-0328-J802#15 | 32i-B Designation of Number of Axes, 15 Axes |
| A02B-0328-J802#16 | 32i-B Designation of Number of Axes, 16 Axes |
| A02B-0328-J802#17 | 32i-B Designation of Number of Axes, 17 Axes |
| A02B-0328-J802#18 | 32i-B Designation of Number of Axes, 18 Axes |
| A02B-0328-J802#19 | 32i-B Designation of Number of Axes, 19 Axes |
| A02B-0328-J802#2 | 32i-B Designation of Number of Axes, 2 Axes |
| A02B-0328-J802#20 | 32i-B Designation of Number of Axes, 20 Axes |
| A02B-0328-J802#3 | 32i-B Designation of Number of Axes, 3 Axes |
| A02B-0328-J802#4 | 32i-B Designation of Number of Axes, 4 Axes |
| A02B-0328-J802#5 | 32i-B Designation of Number of Axes, 5 Axes |
| A02B-0328-J802#6 | 32i-B Designation of Number of Axes, 6 Axes |
| A02B-0328-J802#7 | 32i-B Designation of Number of Axes, 7 Axes |
| A02B-0328-J802#8 | 32i-B Designation of Number of Axes, 8 Axes |
| A02B-0328-J802#9 | 32i-B Designation of Number of Axes, 9 Axes |
| A02B-0329-J802#1 | 30i-LB Designation of Number of Axes, 1 Axes |
| A02B-0329-J802#10 | 30i-LB Designation of Number of Axes, 10 Axes |
| A02B-0329-J802#11 | 30i-LB Designation of Number of Axes, 11 Axes |
| A02B-0329-J802#12 | 30i-LB Designation of Number of Axes, 12 Axes |
| A02B-0329-J802#13 | 30i-LB Designation of Number of Axes, 13 Axes |
| A02B-0329-J802#14 | 30i-LB Designation of Number of Axes, 14 Axes |
| A02B-0329-J802#15 | 30i-LB Designation of Number of Axes, 15 Axes |
| A02B-0329-J802#16 | 30i-LB Designation of Number of Axes, 16 Axes |
| A02B-0329-J802#17 | 30i-LB Designation of Number of Axes, 17 Axes |
| A02B-0329-J802#18 | 30i-LB Designation of Number of Axes, 18 Axes |
| A02B-0329-J802#19 | 30i-LB Designation of Number of Axes, 19 Axes |
| A02B-0329-J802#2 | 30i-LB Designation of Number of Axes, 2 Axes |
| A02B-0329-J802#20 | 30i-LB Designation of Number of Axes, 20 Axes |
| A02B-0329-J802#21 | 30i-LB Designation of Number of Axes, 21 Axes |
| A02B-0329-J802#22 | 30i-LB Designation of Number of Axes, 22 Axes |
| A02B-0329-J802#23 | 30i-LB Designation of Number of Axes, 23 Axes |
| A02B-0329-J802#24 | 30i-LB Designation of Number of Axes, 24 Axes |
| A02B-0329-J802#25 | 30i-LB Designation of Number of Axes, 25 Axes |
| A02B-0329-J802#26 | 30i-LB Designation of Number of Axes, 26 Axes |
| A02B-0329-J802#27 | 30i-LB Designation of Number of Axes, 27 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

030

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0329-J802#28 | 30i-LB Designation of Number of Axes, 28 Axes |
| A02B-0329-J802#29 | 30i-LB Designation of Number of Axes, 29 Axes |
| A02B-0329-J802#3 | 30i-LB Designation of Number of Axes, 3 Axes |
| A02B-0329-J802#30 | 30i-LB Designation of Number of Axes, 30 Axes |
| A02B-0329-J802#31 | 30i-LB Designation of Number of Axes, 31 Axes |
| A02B-0329-J802#32 | 30i-LB Designation of Number of Axes, 32 Axes |
| A02B-0329-J802#4 | 30i-LB Designation of Number of Axes, 4 Axes |
| A02B-0329-J802#5 | 30i-LB Designation of Number of Axes, 5 Axes |
| A02B-0329-J802#6 | 30i-LB Designation of Number of Axes, 6 Axes |
| A02B-0329-J802#7 | 30i-LB Designation of Number of Axes, 7 Axes |
| A02B-0329-J802#8 | 30i-LB Designation of Number of Axes, 8 Axes |
| A02B-0329-J802#9 | 30i-LB Designation of Number of Axes, 9 Axes |
| A02B-0331-J802#1 | 30i-PB Designation of Number of Axes, 1 Axes |
| A02B-0331-J802#10 | 30i-PB Designation of Number of Axes, 10 Axes |
| A02B-0331-J802#11 | 30i-PB Designation of Number of Axes, 11 Axes |
| A02B-0331-J802#12 | 30i-PB Designation of Number of Axes, 12 Axes |
| A02B-0331-J802#13 | 30i-PB Designation of Number of Axes, 13 Axes |
| A02B-0331-J802#14 | 30i-PB Designation of Number of Axes, 14 Axes |
| A02B-0331-J802#15 | 30i-PB Designation of Number of Axes, 15 Axes |
| A02B-0331-J802#16 | 30i-PB Designation of Number of Axes, 16 Axes |
| A02B-0331-J802#17 | 30i-PB Designation of Number of Axes, 17 Axes |
| A02B-0331-J802#18 | 30i-PB Designation of Number of Axes, 18 Axes |
| A02B-0331-J802#19 | 30i-PB Designation of Number of Axes, 19 Axes |
| A02B-0331-J802#2 | 30i-PB Designation of Number of Axes, 2 Axes |
| A02B-0331-J802#20 | 30i-PB Designation of Number of Axes, 20 Axes |
| A02B-0331-J802#21 | 30i-PB Designation of Number of Axes, 21 Axes |
| A02B-0331-J802#22 | 30i-PB Designation of Number of Axes, 22 Axes |
| A02B-0331-J802#23 | 30i-PB Designation of Number of Axes, 23 Axes |
| A02B-0331-J802#24 | 30i-PB Designation of Number of Axes, 24 Axes |
| A02B-0331-J802#25 | 30i-PB Designation of Number of Axes, 25 Axes |
| A02B-0331-J802#26 | 30i-PB Designation of Number of Axes, 26 Axes |
| A02B-0331-J802#27 | 30i-PB Designation of Number of Axes, 27 Axes |
| A02B-0331-J802#28 | 30i-PB Designation of Number of Axes, 28 Axes |
| A02B-0331-J802#29 | 30i-PB Designation of Number of Axes, 29 Axes |
| A02B-0331-J802#3 | 30i-PB Designation of Number of Axes, 3 Axes |
| A02B-0331-J802#30 | 30i-PB Designation of Number of Axes, 30 Axes |
| A02B-0331-J802#31 | 30i-PB Designation of Number of Axes, 31 Axes |
| A02B-0331-J802#32 | 30i-PB Designation of Number of Axes, 32 Axes |
| A02B-0331-J802#4 | 30i-PB Designation of Number of Axes, 4 Axes |
| A02B-0331-J802#5 | 30i-PB Designation of Number of Axes, 5 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0331-J802#6 | 30i-PB Designation of Number of Axes, 6 Axes |
| A02B-0331-J802#7 | 30i-PB Designation of Number of Axes, 7 Axes |
| A02B-0331-J802#8 | 30i-PB Designation of Number of Axes, 8 Axes |
| A02B-0331-J802#9 | 30i-PB Designation of Number of Axes, 9 Axes |
| A02B-0333-J802#1 | 35i-B Designation of Number of Axes, 1 Axis |
| A02B-0333-J802#10 | 35i-B Designation of Control Axes, 10 Axes |
| A02B-0333-J802#11 | 35i-B Designation of Control Axes, 11 Axes |
| A02B-0333-J802#12 | 35i-B Designation of Control Axes, 12 Axes |
| A02B-0333-J802#13 | 35i-B Designation of Control Axes, 13 Axes |
| A02B-0333-J802#14 | 35i-B Designation of Control Axes, 14 Axes |
| A02B-0333-J802#15 | 35i-B Designation of Control Axes, 15 Axes |
| A02B-0333-J802#16 | 35i-B Designation of Control Axes, 16 Axes |
| A02B-0333-J802#2 | 35i-B Designation of Number of Axes, 2 Axes |
| A02B-0333-J802#3 | 35i-B Designation of Number of Axes, 3 Axes |
| A02B-0333-J802#4 | 35i-B Designation of Number of Axes, 4 Axes |
| A02B-0333-J802#5 | 35i-B Designation of Number of Axes, 5 Axes |
| A02B-0333-J802#6 | 35i-B Designation of Number of Axes, 6 Axes |
| A02B-0333-J802#7 | 35i-B Designation of Control Axes, 7 Axes |
| A02B-0333-J802#8 | 35i-B Designation of Control Axes, 8 Axes |
| A02B-0333-J802#9 | 35i-B Designation of Control Axes, 9 Axes |
| A02B-0334-J802#1 | PM i-A Designation of Number of Axes, 1 Axis |
| A02B-0334-J802#10 | PM i-A Designation of Number of Axes, 10 Axes |
| A02B-0334-J802#11 | PM i-A Designation of Number of Axes, 11 Axes |
| A02B-0334-J802#12 | PM i-A Designation of Number of Axes, 12 Axes |
| A02B-0334-J802#13 | PM i-A Designation of Number of Axes, 13 Axes |
| A02B-0334-J802#14 | PM i-A Designation of Number of Axes, 14 Axes |
| A02B-0334-J802#15 | PM i-A Designation of Number of Axes, 15 Axes |
| A02B-0334-J802#16 | PM i-A Designation of Number of Axes, 16 Axes |
| A02B-0334-J802#17 | PM i-A Designation of Number of Axes, 17 Axes |
| A02B-0334-J802#18 | PM i-A Designation of Number of Axes, 18 Axes |
| A02B-0334-J802#19 | PM i-A Designation of Number of Axes, 19 Axes |
| A02B-0334-J802#2 | PM i-A Designation of Number of Axes, 2 Axes |
| A02B-0334-J802#20 | PM i-A Designation of Number of Axes, 20 Axes |
| A02B-0334-J802#21 | PM i-A Designation of Number of Axes, 21 Axes |
| A02B-0334-J802#22 | PM i-A Designation of Number of Axes, 22 Axes |
| A02B-0334-J802#23 | PM i-A Designation of Number of Axes, 23 Axes |
| A02B-0334-J802#24 | PM i-A Designation of Number of Axes, 24 Axes |
| A02B-0334-J802#25 | PM i-A Designation of Number of Axes, 25 Axes |
| A02B-0334-J802#26 | PM i-A Designation of Number of Axes, 26 Axes |
| A02B-0334-J802#27 | PM i-A Designation of Number of Axes, 27 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0334-J802#28 | PM i-A Designation of Number of Axes, 28 Axes |
| A02B-0334-J802#29 | PM i-A Designation of Number of Axes, 29 Axes |
| A02B-0334-J802#3 | PM i-A Designation of Number of Axes, 3 Axes |
| A02B-0334-J802#30 | PM i-A Designation of Number of Axes, 30 Axes |
| A02B-0334-J802#31 | PM i-A Designation of Number of Axes, 31 Axes |
| A02B-0334-J802#32 | PM i-A Designation of Number of Axes, 32 Axes |
| A02B-0334-J802#4 | PM i-A Designation of Number of Axes, 4 Axes |
| A02B-0334-J802#5 | PM i-A Designation of Number of Axes, 5 Axes |
| A02B-0334-J802#6 | PM i-A Designation of Number of Axes, 6 Axes |
| A02B-0334-J802#7 | PM i-A Designation of Number of Axes, 7 Axes |
| A02B-0334-J802#8 | PM i-A Designation of Number of Axes, 8 Axes |
| A02B-0334-J802#9 | PM i-A Designation of Number of Axes, 9 Axes |
| A02B-0353-J802#10 | 30i-BP Designation of Control Axes - 10 Axes |
| A02B-0353-J802#11 | 30i-BP Designation of Control Axes - 11 Axes |
| A02B-0353-J802#12 | 30i-BP Designation of Control Axes - 12 Axes |
| A02B-0353-J802#13 | 30i-BP Designation of Control Axes - 13 Axes |
| A02B-0353-J802#14 | 30i-BP Designation of Control Axes - 14 Axes |
| A02B-0353-J802#15 | 30i-BP Designation of Control Axes - 15 Axes |
| A02B-0353-J802#16 | 30i-BP Designation of Control Axes - 16 Axes |
| A02B-0353-J802#17 | 30i-BP Designation of Control Axes - 17 Axes |
| A02B-0353-J802#18 | 30i-BP Designation of Control Axes - 18 Axes |
| A02B-0353-J802#19 | 30i-BP Designation of Control Axes - 19 Axes |
| A02B-0353-J802#2 | 30i-BP Designation of Control Axes - 2 Axes |
| A02B-0353-J802#20 | 30i-BP Designation of Control Axes - 20 Axes |
| A02B-0353-J802#21 | 30i-BP Designation of Control Axes - 21 Axes |
| A02B-0353-J802#22 | 30i-BP Designation of Control Axes - 22 Axes |
| A02B-0353-J802#23 | 30i-BP Designation of Control Axes - 23 Axes |
| A02B-0353-J802#24 | 30i-BP Designation of Control Axes - 24 Axes |
| A02B-0353-J802#25 | 30i-BP Designation of Control Axes - 25 Axes |
| A02B-0353-J802#26 | 30i-BP Designation of Control Axes - 26 Axes |
| A02B-0353-J802#27 | 30i-BP Designation of Control Axes - 27 Axes |
| A02B-0353-J802#28 | 30i-BP Designation of Control Axes - 28 Axes |
| A02B-0353-J802#29 | 30i-BP Designation of Control Axes - 29 Axes |
| A02B-0353-J802#3 | 30i-BP Designation of Control Axes - 3 Axes |
| A02B-0353-J802#30 | 30i-BP Designation of Control Axes - 30 Axes |
| A02B-0353-J802#31 | 30i-BP Designation of Control Axes - 31 Axes |
| A02B-0353-J802#32 | 30i-BP Designation of Control Axes - 32 Axes |
| A02B-0353-J802#33 | 30i-BP Designation of Control Axes - 33 Axes |
| A02B-0353-J802#34 | 30i-BP Designation of Control Axes - 34 Axes |
| A02B-0353-J802#35 | 30i-BP Designation of Control Axes - 35 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

033

| Specification | Description |
|-------------------|----------------------------------------------|
| A02B-0353-J802#36 | 30i-BP Designation of Control Axes - 36 Axes |
| A02B-0353-J802#37 | 30i-BP Designation of Control Axes - 37 Axes |
| A02B-0353-J802#38 | 30i-BP Designation of Control Axes - 38 Axes |
| A02B-0353-J802#39 | 30i-BP Designation of Control Axes - 39 Axes |
| A02B-0353-J802#4 | 30i-BP Designation of Control Axes - 4 Axes |
| A02B-0353-J802#40 | 30i-BP Designation of Control Axes - 40 Axes |
| A02B-0353-J802#41 | 30i-BP Designation of Control Axes - 41 Axes |
| A02B-0353-J802#42 | 30i-BP Designation of Control Axes - 42 Axes |
| A02B-0353-J802#43 | 30i-BP Designation of Control Axes - 43 Axes |
| A02B-0353-J802#44 | 30i-BP Designation of Control Axes - 44 Axes |
| A02B-0353-J802#45 | 30i-BP Designation of Control Axes - 45 Axes |
| A02B-0353-J802#46 | 30i-BP Designation of Control Axes - 46 Axes |
| A02B-0353-J802#47 | 30i-BP Designation of Control Axes - 47 Axes |
| A02B-0353-J802#48 | 30i-BP Designation of Control Axes - 48 Axes |
| A02B-0353-J802#49 | 30i-BP Designation of Control Axes - 49 Axes |
| A02B-0353-J802#5 | 30i-BP Designation of Control Axes - 5 Axes |
| A02B-0353-J802#50 | 30i-BP Designation of Control Axes - 50 Axes |
| A02B-0353-J802#51 | 30i-BP Designation of Control Axes - 51 Axes |
| A02B-0353-J802#52 | 30i-BP Designation of Control Axes - 52 Axes |
| A02B-0353-J802#53 | 30i-BP Designation of Control Axes - 53 Axes |
| A02B-0353-J802#54 | 30i-BP Designation of Control Axes - 54 Axes |
| A02B-0353-J802#55 | 30i-BP Designation of Control Axes - 55 Axes |
| A02B-0353-J802#56 | 30i-BP Designation of Control Axes - 56 Axes |
| A02B-0353-J802#57 | 30i-BP Designation of Control Axes - 57 Axes |
| A02B-0353-J802#58 | 30i-BP Designation of Control Axes - 58 Axes |
| A02B-0353-J802#59 | 30i-BP Designation of Control Axes - 59 Axes |
| A02B-0353-J802#6 | 30i-BP Designation of Control Axes - 6 Axes |
| A02B-0353-J802#60 | 30i-BP Designation of Control Axes - 60 Axes |
| A02B-0353-J802#61 | 30i-BP Designation of Control Axes - 61 Axes |
| A02B-0353-J802#62 | 30i-BP Designation of Control Axes - 62 Axes |
| A02B-0353-J802#63 | 30i-BP Designation of Control Axes - 63 Axes |
| A02B-0353-J802#64 | 30i-BP Designation of Control Axes - 64 Axes |
| A02B-0353-J802#65 | 30i-BP Designation of Control Axes - 65 Axes |
| A02B-0353-J802#66 | 30i-BP Designation of Control Axes - 66 Axes |
| A02B-0353-J802#67 | 30i-BP Designation of Control Axes - 67 Axes |
| A02B-0353-J802#68 | 30i-BP Designation of Control Axes - 68 Axes |
| A02B-0353-J802#69 | 30i-BP Designation of Control Axes - 69 Axes |
| A02B-0353-J802#7 | 30i-BP Designation of Control Axes - 7 Axes |
| A02B-0353-J802#70 | 30i-BP Designation of Control Axes - 70 Axes |
| A02B-0353-J802#71 | 30i-BP Designation of Control Axes - 71 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0353-J802#72 | 30i-BP Designation of Control Axes - 72 Axes |
| A02B-0353-J802#73 | 30i-BP Designation of Control Axes - 73 Axes |
| A02B-0353-J802#74 | 30i-BP Designation of Control Axes - 74 Axes |
| A02B-0353-J802#75 | 30i-BP Designation of Control Axes - 75 Axes |
| A02B-0353-J802#76 | 30i-BP Designation of Control Axes - 76 Axes |
| A02B-0353-J802#77 | 30i-BP Designation of Control Axes - 77 Axes |
| A02B-0353-J802#78 | 30i-BP Designation of Control Axes - 78 Axes |
| A02B-0353-J802#79 | 30i-BP Designation of Control Axes - 79 Axes |
| A02B-0353-J802#8 | 30i-BP Designation of Control Axes - 8 Axes |
| A02B-0353-J802#80 | 30i-BP Designation of Control Axes - 80 Axes |
| A02B-0353-J802#81 | 30i-BP Designation of Control Axes - 81 Axes |
| A02B-0353-J802#82 | 30i-BP Designation of Control Axes - 82 Axes |
| A02B-0353-J802#83 | 30i-BP Designation of Control Axes - 83 Axes |
| A02B-0353-J802#84 | 30i-BP Designation of Control Axes - 84 Axes |
| A02B-0353-J802#85 | 30i-BP Designation of Control Axes - 85 Axes |
| A02B-0353-J802#86 | 30i-BP Designation of Control Axes - 86 Axes |
| A02B-0353-J802#87 | 30i-BP Designation of Control Axes - 87 Axes |
| A02B-0353-J802#88 | 30i-BP Designation of Control Axes - 88 Axes |
| A02B-0353-J802#89 | 30i-BP Designation of Control Axes - 89 Axes |
| A02B-0353-J802#9 | 30i-BP Designation of Control Axes - 9 Axes |
| A02B-0353-J802#90 | 30i-BP Designation of Control Axes - 90 Axes |
| A02B-0353-J802#91 | 30i-BP Designation of Control Axes - 91 Axes |
| A02B-0353-J802#92 | 30i-BP Designation of Control Axes - 92 Axes |
| A02B-0353-J802#93 | 30i-BP Designation of Control Axes - 93 Axes |
| A02B-0353-J802#94 | 30i-BP Designation of Control Axes - 94 Axes |
| A02B-0353-J802#95 | 30i-BP Designation of Control Axes - 95 Axes |
| A02B-0353-J802#96 | 30i-BP Designation of Control Axes - 96 Axes |
| A02B-0356-J802#10 | 31i-B5P Designation of Control Axes - 10 Axes |
| A02B-0356-J802#11 | 31i-B5P Designation of Control Axes - 11 Axes |
| A02B-0356-J802#12 | 31i-B5P Designation of Control Axes - 12 Axes |
| A02B-0356-J802#13 | 31i-B5P Designation of Control Axes - 13 Axes |
| A02B-0356-J802#14 | 31i-B5P Designation of Control Axes - 14 Axes |
| A02B-0356-J802#15 | 31i-B5P Designation of Control Axes - 15 Axes |
| A02B-0356-J802#16 | 31i-B5P Designation of Control Axes - 16 Axes |
| A02B-0356-J802#17 | 31i-B5P Designation of Control Axes - 17 Axes |
| A02B-0356-J802#18 | 31i-B5P Designation of Control Axes - 18 Axes |
| A02B-0356-J802#19 | 31i-B5P Designation of Control Axes - 19 Axes |
| A02B-0356-J802#2 | 31i-B5P Designation of Control Axes - 2 Axes |
| A02B-0356-J802#20 | 31i-B5P Designation of Control Axes - 20 Axes |
| A02B-0356-J802#21 | 31i-B5P Designation of Control Axes - 21 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

035

| Specification | Description |
|-------------------|-----------------------------------------------|
| A02B-0356-J802#22 | 31i-B5P Designation of Control Axes - 22 Axes |
| A02B-0356-J802#23 | 31i-B5P Designation of Control Axes - 23 Axes |
| A02B-0356-J802#24 | 31i-B5P Designation of Control Axes - 24 Axes |
| A02B-0356-J802#25 | 31i-B5P Designation of Control Axes - 25 Axes |
| A02B-0356-J802#26 | 31i-B5P Designation of Control Axes - 26 Axes |
| A02B-0356-J802#3 | 31i-B5P Designation of Control Axes - 3 Axes |
| A02B-0356-J802#4 | 31i-B5P Designation of Control Axes - 4 Axes |
| A02B-0356-J802#5 | 31i-B5P Designation of Control Axes - 5 Axes |
| A02B-0356-J802#6 | 31i-B5P Designation of Control Axes - 6 Axes |
| A02B-0356-J802#7 | 31i-B5P Designation of Control Axes - 7 Axes |
| A02B-0356-J802#8 | 31i-B5P Designation of Control Axes - 8 Axes |
| A02B-0356-J802#9 | 31i-B5P Designation of Control Axes - 9 Axes |
| A02B-0357-J802#10 | 31i-BP Designation of Control Axes - 10 Axes |
| A02B-0357-J802#11 | 31i-BP Designation of Control Axes - 11 Axes |
| A02B-0357-J802#12 | 31i-BP Designation of Control Axes - 12 Axes |
| A02B-0357-J802#13 | 31i-BP Designation of Control Axes - 13 Axes |
| A02B-0357-J802#14 | 31i-BP Designation of Control Axes - 14 Axes |
| A02B-0357-J802#15 | 31i-BP Designation of Control Axes - 15 Axes |
| A02B-0357-J802#16 | 31i-BP Designation of Control Axes - 16 Axes |
| A02B-0357-J802#17 | 31i-BP Designation of Control Axes - 17 Axes |
| A02B-0357-J802#18 | 31i-BP Designation of Control Axes - 18 Axes |
| A02B-0357-J802#19 | 31i-BP Designation of Control Axes - 19 Axes |
| A02B-0357-J802#2 | 31i-BP Designation of Control Axes - 2 Axes |
| A02B-0357-J802#20 | 31i-BP Designation of Control Axes - 20 Axes |
| A02B-0357-J802#21 | 31i-BP Designation of Control Axes - 21 Axes |
| A02B-0357-J802#22 | 31i-BP Designation of Control Axes - 22 Axes |
| A02B-0357-J802#23 | 31i-BP Designation of Control Axes - 23 Axes |
| A02B-0357-J802#24 | 31i-BP Designation of Control Axes - 24 Axes |
| A02B-0357-J802#25 | 31i-BP Designation of Control Axes - 25 Axes |
| A02B-0357-J802#26 | 31i-BP Designation of Control Axes - 26 Axes |
| A02B-0357-J802#3 | 31i-BP Designation of Control Axes - 3 Axes |
| A02B-0357-J802#4 | 31i-BP Designation of Control Axes - 4 Axes |
| A02B-0357-J802#5 | 31i-BP Designation of Control Axes - 5 Axes |
| A02B-0357-J802#6 | 31i-BP Designation of Control Axes - 6 Axes |
| A02B-0357-J802#7 | 31i-BP Designation of Control Axes - 7 Axes |
| A02B-0357-J802#8 | 31i-BP Designation of Control Axes - 8 Axes |
| A02B-0357-J802#9 | 31i-BP Designation of Control Axes - 9 Axes |
| A02B-0358-J802#10 | 32i-BP Designation of Control Axes - 10 Axes |
| A02B-0358-J802#11 | 32i-BP Designation of Control Axes - 11 Axes |
| A02B-0358-J802#12 | 32i-BP Designation of Control Axes - 12 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

036

| Specification | Description |
|-------------------|----------------------------------------------|
| A02B-0358-J802#13 | 32i-BP Designation of Control Axes - 21 Axes |
| A02B-0358-J802#14 | 32i-BP Designation of Control Axes - 22 Axes |
| A02B-0358-J802#15 | 32i-BP Designation of Control Axes - 15 Axes |
| A02B-0358-J802#16 | 32i-BP Designation of Control Axes - 16 Axes |
| A02B-0358-J802#17 | 32i-BP Designation of Control Axes - 17 Axes |
| A02B-0358-J802#18 | 32i-BP Designation of Control Axes - 18 Axes |
| A02B-0358-J802#19 | 32i-BP Designation of Control Axes - 19 Axes |
| A02B-0358-J802#2 | 32i-BP Designation of Control Axes - 2 Axes |
| A02B-0358-J802#20 | 32i-BP Designation of Control Axes - 20 Axes |
| A02B-0358-J802#3 | 32i-BP Designation of Control Axes - 3 Axes |
| A02B-0358-J802#4 | 32i-BP Designation of Control Axes - 4 Axes |
| A02B-0358-J802#5 | 32i-BP Designation of Control Axes - 5 Axes |
| A02B-0358-J802#6 | 32i-BP Designation of Control Axes - 6 Axes |
| A02B-0358-J802#7 | 32i-BP Designation of Control Axes - 7 Axes |
| A02B-0358-J802#8 | 32i-BP Designation of Control Axes - 8 Axes |
| A02B-0358-J802#9 | 32i-BP Designation of Control Axes - 9 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

037

Controlled Axis

Designation of Machine Groups

This function specifies the number of machine groups or axes groups that the CNC can control.

If multiple paths are used, several paths can be formed into a group. By doing so, the group can share data, and if an alarm is issued with a path, the other path(s) in the group can be stopped. A group of those paths is referred to as a machine group.

Up to three groups can be used, depending on the type of CNC.

The following items are impacted by the machine group configuration:

- Emergency stop signal
- RESET on the MDI
- Operation performed when an alarm is issued

Ordering Information

| Specification | Description |
|------------------|-------------------------------------------------|
| A02B-0323-S836#1 | 30i-B Designation of Machine Groups, 1 Group |
| A02B-0323-S836#2 | 30i-B Designation of Machine Groups, 2 Groups |
| A02B-0323-S836#3 | 30i-B Designation of Machine Groups, 3 Groups |
| A02B-0326-S836#1 | 31i-B5 Designation of Machine Groups, 1 Group |
| A02B-0326-S836#2 | 31i-B5 Designation of Machine Groups, 2 Groups |
| A02B-0326-S836#3 | 31i-B5 Designation of Machine Groups, 3 Groups |
| A02B-0327-S836#1 | 31i-B Designation of Machine Groups, 1 Group |
| A02B-0327-S836#2 | 31i-B Designation of Machine Groups, 2 Groups |
| A02B-0327-S836#3 | 31i-B Designation of Machine Groups, 3 Groups |
| A02B-0328-S836#1 | 32i-B Designation of Machine Groups, 1 Group |
| A02B-0328-S836#2 | 32i-B Designation of Machine Groups, 2 Groups |
| A02B-0333-S836#1 | 35i-B Designation of Machine Groups, 1 Group |
| A02B-0333-S836#2 | 35i-B Designation of Machine Groups, 2 Groups |
| A02B-0334-S836#1 | PM i-A Designation of Machine Groups, 1 Group |
| A02B-0334-S836#2 | PM i-A Designation of Machine Groups, 2 Groups |
| A02B-0334-S836#3 | PM i-A Designation of Machine Groups, 3 Groups |
| A02B-0339-S836#1 | 0i-TF Number of Machining Groups: 1 Group |
| A02B-0339-S836#2 | 0i-TF Number of Machining Groups: 2 Groups |
| A02B-0339-S836#3 | 0i-TF Number of Machining Groups: 3 Groups |
| A02B-0340-S836#1 | 0i-MF Number of Machining Groups: 1 Group |
| A02B-0340-S836#2 | 0i-MF Number of Machining Groups: 2 Groups |
| A02B-0340-S836#3 | 0i-MF Number of Machining Groups: 3 Groups |
| A02B-0349-S836#1 | 0i-TFP Designation of Machining Groups: 1 Group |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

038

| Specification | Description |
|------------------|--------------------------------------------------|
| A02B-0349-S836#2 | 0i-TFP Designation of Machining Groups: 2 Groups |
| A02B-0349-S836#3 | 0i-TFP Designation of Machining Groups: 3 Groups |
| A02B-0350-S836#1 | 0i-MFP Designation of Machining Groups: 1 Group |
| A02B-0350-S836#2 | 0i-MFP Designation of Machining Groups: 2 Groups |
| A02B-0350-S836#3 | 0i-MFP Designation of Machining Groups: 3 Groups |
| A02B-0353-S836#1 | 30i-BP Designation of Machine Groups - 1 Group |
| A02B-0353-S836#2 | 30i-BP Designation of Machine Groups - 2 Groups |
| A02B-0353-S836#3 | 30i-BP Designation of Machine Groups - 3 Groups |
| A02B-0356-S836#1 | 31i-B5P Designation of Machine Groups - 1 Group |
| A02B-0356-S836#2 | 31i-B5P Designation of Machine Groups - 2 Groups |
| A02B-0356-S836#3 | 31i-B5P Designation of Machine Groups - 3 Groups |
| A02B-0357-S836#1 | 31i-BP Designation of Machine Groups - 1 Group |
| A02B-0357-S836#2 | 31i-BP Designation of Machine Groups - 2 Groups |
| A02B-0357-S836#3 | 31i-BP Designation of Machine Groups - 3 Groups |
| A02B-0358-S836#1 | 32i-BP Designation of Machine Groups - 1 Group |
| A02B-0358-S836#2 | 32i-BP Designation of Machine Groups - 2 Groups |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

039

Controlled Axis

Designation of Control Paths

This function specifies the number of controlled path for the CNC.

A path represents a group of axes that are controlled by the same NC program.

Up to 10 paths can be used, depending on the type of NC system. A path for loader control is also counted as a path.

Ordering Information

| Specification | Description |
|-------------------|----------------------------------------------|
| A02B-0323-S801#1 | 30i-B Designation of Control Paths, 1 Path |
| A02B-0323-S801#10 | 30i-B Designation of Control Paths, 10 Paths |
| A02B-0323-S801#11 | 30i-B Designation of Control Paths, 11 Paths |
| A02B-0323-S801#12 | 30i-B Designation of Control Paths, 12 Paths |
| A02B-0323-S801#13 | 30i-B Designation of Control Paths, 13 Paths |
| A02B-0323-S801#14 | 30i-B Designation of Control Paths, 14 Paths |
| A02B-0323-S801#15 | 30i-B Designation of Control Paths, 15 Paths |
| A02B-0323-S801#2 | 30i-B Designation of Control Paths, 2 Paths |
| A02B-0323-S801#3 | 30i-B Designation of Control Paths, 3 Paths |
| A02B-0323-S801#4 | 30i-B Designation of Control Paths, 4 Paths |
| A02B-0323-S801#5 | 30i-B Designation of Control Paths, 5 Paths |
| A02B-0323-S801#6 | 30i-B Designation of Control Paths, 6 Paths |
| A02B-0323-S801#7 | 30i-B Designation of Control Paths, 7 Paths |
| A02B-0323-S801#8 | 30i-B Designation of Control Paths, 8 Paths |
| A02B-0323-S801#9 | 30i-B Designation of Control Paths, 9 Paths |
| A02B-0326-S801#1 | 31i-B5 Designation of Control Paths, 1 Path |
| A02B-0326-S801#2 | 31i-B5 Designation of Control Paths, 2 Paths |
| A02B-0326-S801#3 | 31i-B5 Designation of Control Paths, 3 Paths |
| A02B-0326-S801#4 | 31i-B5 Designation of Control Paths, 4 Paths |
| A02B-0326-S801#5 | 31i-B5 Designation of Control Paths, 5 Paths |
| A02B-0326-S801#6 | 31i-B5 Designation of Control Paths, 6 Paths |
| A02B-0327-S801#1 | 31i-B Designation of Control Paths, 1 Path |
| A02B-0327-S801#2 | 31i-B Designation of Control Paths, 2 Paths |
| A02B-0327-S801#3 | 31i-B Designation of Control Paths, 3 Paths |
| A02B-0327-S801#4 | 31i-B Designation of Control Paths, 4 Paths |
| A02B-0327-S801#5 | 31i-B Designation of Control Paths, 5 Paths |
| A02B-0327-S801#6 | 31i-B Designation of Control Paths, 6 Paths |
| A02B-0328-S801#1 | 32i-B Designation of Control Paths, 1 Path |
| A02B-0328-S801#2 | 32i-B Designation of Control Paths, 2 Paths |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|------------------------------------------------|
| A02B-0333-S801#1 | 35i-B Designation of Control Paths, 1 Path |
| A02B-0333-S801#2 | 35i-B Designation of Control Paths, 2 Paths |
| A02B-0333-S801#3 | 35i-B Designation of Control Paths, 3 Paths |
| A02B-0333-S801#4 | 35i-B Designation of Control Paths, 4 Paths |
| A02B-0334-S801#1 | PM i-A Designation of Control Paths, 1 Path |
| A02B-0334-S801#2 | PM i-A Designation of Control Paths, 2 Paths |
| A02B-0334-S801#3 | PM i-A Designation of Control Paths, 3 Paths |
| A02B-0334-S801#4 | PM i-A Designation of Control Paths, 4 Paths |
| A02B-0339-S801#1 | 0i-TF Number of Control Paths: 1 Path |
| A02B-0339-S801#2 | 0i-TF Number of Control Paths: 2 Paths |
| A02B-0340-S801#1 | 0i-MF Number of Control Paths: 1 Path |
| A02B-0340-S801#2 | 0i-MF Number of Control Paths: 2 Paths |
| A02B-0349-S801#1 | 0i-TFP Designation of Control Paths: 1 Path |
| A02B-0349-S801#2 | 0i-TFP Designation of Control Paths: 2 Paths |
| A02B-0350-S801#1 | 0i-MFP Designation of Control Paths: 1 Path |
| A02B-0350-S801#2 | 0i-MFP Designation of Control Paths: 2 Paths |
| A02B-0353-S801#1 | 30i-BP Designation of Control Paths - 1 Path |
| A02B-0353-S801#10 | 30i-BP Designation of Control Paths - 10 Paths |
| A02B-0353-S801#11 | 30i-BP Designation of Control Paths - 11 Paths |
| A02B-0353-S801#12 | 30i-BP Designation of Control Paths - 12 Paths |
| A02B-0353-S801#13 | 30i-BP Designation of Control Paths - 13 Paths |
| A02B-0353-S801#14 | 30i-BP Designation of Control Paths - 14 Paths |
| A02B-0353-S801#15 | 30i-BP Designation of Control Paths - 15 Paths |
| A02B-0353-S801#2 | 30i-BP Designation of Control Paths - 2 Paths |
| A02B-0353-S801#3 | 30i-BP Designation of Control Paths - 3 Paths |
| A02B-0353-S801#4 | 30i-BP Designation of Control Paths - 4 Paths |
| A02B-0353-S801#5 | 30i-BP Designation of Control Paths - 5 Paths |
| A02B-0353-S801#6 | 30i-BP Designation of Control Paths - 6 Paths |
| A02B-0353-S801#7 | 30i-BP Designation of Control Paths - 7 Paths |
| A02B-0353-S801#8 | 30i-BP Designation of Control Paths - 8 Paths |
| A02B-0353-S801#9 | 30i-BP Designation of Control Paths - 9 Paths |
| A02B-0356-S801#1 | 31i-B5P Designation of Control Paths - 1 Path |
| A02B-0356-S801#2 | 31i-B5P Designation of Control Paths - 2 Paths |
| A02B-0356-S801#3 | 31i-B5P Designation of Control Paths - 3 Paths |
| A02B-0356-S801#4 | 31i-B5P Designation of Control Paths - 4 Paths |
| A02B-0356-S801#5 | 31i-B5P Designation of Control Paths - 5 Paths |
| A02B-0356-S801#6 | 31i-B5P Designation of Control Paths - 6 Paths |
| A02B-0357-S801#1 | 31i-BP Designation of Control Paths - 1 Path |
| A02B-0357-S801#2 | 31i-BP Designation of Control Paths - 2 Paths |
| A02B-0357-S801#3 | 31i-BP Designation of Control Paths - 3 Paths |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

041

| Specification | Description |
|------------------|-----------------------------------------------|
| A02B-0357-S801#4 | 31i-BP Designation of Control Paths - 4 Paths |
| A02B-0357-S801#5 | 31i-BP Designation of Control Paths - 5 Paths |
| A02B-0357-S801#6 | 31i-BP Designation of Control Paths - 6 Paths |
| A02B-0358-S801#1 | 32i-BP Designation of Control Paths - 1 Path |
| A02B-0358-S801#2 | 32i-BP Designation of Control Paths - 2 Paths |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

042

Controlled Axis

Controllable Axes Expansion

This function increases the maximum number of axes controllable by the CNC.

This function is a basic function in FANUC Series 30i-B Plus.

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J801 | 30i-B Controlled Axes Expansion |
| A02B-0326-J801 | 31i-B5 Controlled Axes Expansion |
| A02B-0327-J801 | 31i-B Controlled Axes Expansion |
| A02B-0328-J801 | 32i-B Controlled Axes Expansion |
| A02B-0329-J801 | 30i-LB Controllable Axes Expansion |
| A02B-0331-J801 | 30i-PB Controllable Axes Expansion |
| A02B-0339-R689 | 0i-TF Controllable Axes Expansion |
| A02B-0340-R689 | 0i-MF Controllable Axes Expansion |
| A02B-0349-R689 | 0i-TFP Controllable Axes Expansion |
| A02B-0350-R689 | 0i-MFP Controllable Axes Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

043

Controlled Axis

Spindle Axes Expansion

Features

This option expands the max. number of spindle axes for 0i-F and 0i-F Plus. In a 1-path system of 0i-TF, the max. number is expanded to 3 spindle axes. In a 2-path system of 0i-MF, the max. number is expanded to 4 spindle axes in total. Up to 3 spindle axes can be used in one path. In a 2-path system of 0i-TF, the max. number is expanded to 6 spindle axes in total. Up to 4 spindle axes can be used in one path.

Benefits

- Extends the application range of the FANUC 0i-F series

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0339-R604 | 0i-TF Spindle Axes Expansion |
| A02B-0340-R604 | 0i-MF Spindle Axes Expansion |
| A02B-0349-R604 | 0i-TFP Spindle Axes Expansion |
| A02B-0350-R604 | 0i-MFP Spindle Axes Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

044

Controlled Axis

Expansion of Servo Axes Number

Features

This function expands the number of servo axes of the following CNCs to 7 axes:

- 0i-TF/MF Plus Type 2
- 0i-TF/MF Plus Type 3
- 0i-TF/MF Plus Type 4
- 0i-TF/MF Plus Type 5
- 0i-TF/MF Plus Grinder Package
- 0i-MF Plus Hob Package

Benefits

- Expand the application range for 0i-F Plus

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0349-R014 | 0i-TFP Expansion of Servo Axes Number (max. 7 Axes) |
| A02B-0350-R014 | 0i-MFP Expansion of Servo Axes Number (max. 7 Axes) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

045

Controlled Axis

Simultaneously Controlled Axes Expansion

This function defines the maximum number of axes that can be controlled simultaneously by the CNC.

This function is a basic function in FANUC Series 30i-B Plus.

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0323-J803 | 30i-B Simultaneously Controlled Axes Expansion |
| A02B-0326-J803 | 31i-B5 Simultaneously Controlled Axes Expansion |
| A02B-0327-J803 | 31i-B Simultaneously Controlled Axes Expansion |
| A02B-0328-J803 | 32i-B Simultaneously Controlled Axes Expansion |
| A02B-0329-J803 | 30i-LB Simultaneously Controlled Axes Expansion |
| A02B-0331-J803 | 30i-PB Simultaneously Controlled Axes Expansion |
| A02B-0333-J803 | 35i-B Simultaneously Controlled Axes Expansion (Max. 4 Axes) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

046

Controlled Axis

Axis Control by PMC

Features

This function allows the ladder logic program of the Programmable Machine Controller (PMC) to control up to 4 axes per path as independent axes from the programmed axes of the CNC.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Reduction of the machining cycle time by operating automation devices simultaneously with the part program execution
- Simple mean to add peripheral automation devices such as pallets changers, tool changers, turrets, conveyors, etc.
- Easy activation through M code or push button on the operator panel
- Up to 4 devices can be automated simultaneously
- Ladder logic program resides in non volatile ROM which is protected from accidental changes by the operator

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-J804 | 30i-B Axis Control by PMC |
| A02B-0326-J804 | 31i-B5 Axis Control by PMC |
| A02B-0327-J804 | 31i-B Axis Control by PMC |
| A02B-0328-J804 | 32i-B Axis Control by PMC |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

047

Controlled Axis

Designation of Spindle Axes

Features

This function increases the total number of spindle axes that can be controlled by the CNC.

Ordering Information

| Specification | Description |
|-------------------|------------------------------------------------|
| A02B-0323-S837#1 | 30i-B Designation of Spindle Axes, 1 Spindle |
| A02B-0323-S837#10 | 30i-B Designation of Spindle Axes, 10 Spindles |
| A02B-0323-S837#11 | 30i-B Designation of Spindle Axes, 11 Spindles |
| A02B-0323-S837#12 | 30i-B Designation of Spindle Axes, 12 Spindles |
| A02B-0323-S837#13 | 30i-B Designation of Spindle Axes, 13 Spindles |
| A02B-0323-S837#14 | 30i-B Designation of Spindle Axes, 14 Spindles |
| A02B-0323-S837#15 | 30i-B Designation of Spindle Axes, 15 Spindles |
| A02B-0323-S837#16 | 30i-B Designation of Spindle Axes, 16 Spindles |
| A02B-0323-S837#17 | 30i-B Designation of Spindle Axes, 17 Spindles |
| A02B-0323-S837#18 | 30i-B Designation of Spindle Axes, 18 Spindles |
| A02B-0323-S837#19 | 30i-B Designation of Spindle Axes, 19 Spindles |
| A02B-0323-S837#2 | 30i-B Designation of Spindle Axes, 2 Spindles |
| A02B-0323-S837#20 | 30i-B Designation of Spindle Axes, 20 Spindles |
| A02B-0323-S837#21 | 30i-B Designation of Spindle Axes, 21 Spindles |
| A02B-0323-S837#22 | 30i-B Designation of Spindle Axes, 22 Spindles |
| A02B-0323-S837#23 | 30i-B Designation of Spindle Axes, 23 Spindles |
| A02B-0323-S837#24 | 30i-B Designation of Spindle Axes, 24 Spindles |
| A02B-0323-S837#3 | 30i-B Designation of Spindle Axes, 3 Spindles |
| A02B-0323-S837#4 | 30i-B Designation of Spindle Axes, 4 Spindles |
| A02B-0323-S837#5 | 30i-B Designation of Spindle Axes, 5 Spindles |
| A02B-0323-S837#6 | 30i-B Designation of Spindle Axes, 6 Spindles |
| A02B-0323-S837#7 | 30i-B Designation of Spindle Axes, 7 Spindles |
| A02B-0323-S837#8 | 30i-B Designation of Spindle Axes, 8 Spindles |
| A02B-0323-S837#9 | 30i-B Designation of Spindle Axes, 9 Spindles |
| A02B-0326-S837#1 | 31i-B5 Designation of Spindle Axes, 1 Spindle |
| A02B-0326-S837#2 | 31i-B5 Designation of Spindle Axes, 2 Spindles |
| A02B-0326-S837#3 | 31i-B5 Designation of Spindle Axes, 3 Spindles |
| A02B-0326-S837#4 | 31i-B5 Designation of Spindle Axes, 4 Spindles |
| A02B-0326-S837#5 | 31i-B5 Designation of Spindle Axes, 5 Spindles |
| A02B-0326-S837#6 | 31i-B5 Designation of Spindle Axes, 6 Spindles |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|-------------------|-------------------------------------------------------------|
| A02B-0326-S837#7 | 31i-B5 Designation of Spindle Axes, 7 Spindles |
| A02B-0326-S837#8 | 31i-B5 Designation of Spindle Axes, 8 Spindles |
| A02B-0327-S837#1 | 31i-B Designation of Spindle Axes, 1 Spindle |
| A02B-0327-S837#2 | 31i-B Designation of Spindle Axes, 2 Spindles |
| A02B-0327-S837#3 | 31i-B Designation of Spindle Axes, 3 Spindles |
| A02B-0327-S837#4 | 31i-B Designation of Spindle Axes, 4 Spindles |
| A02B-0327-S837#5 | 31i-B Designation of Spindle Axes, 5 Spindles |
| A02B-0327-S837#6 | 31i-B Designation of Spindle Axes, 6 Spindles |
| A02B-0327-S837#7 | 31i-B Designation of Spindle Axes, 7 Spindles |
| A02B-0327-S837#8 | 31i-B Designation of Spindle Axes, 8 Spindles |
| A02B-0328-S837#1 | 32i-B Designation of Spindle Axes, 1 Spindle |
| A02B-0328-S837#2 | 32i-B Designation of Spindle Axes, 2 Spindles |
| A02B-0328-S837#3 | 32i-B Designation of Spindle Axes, 3 Spindles |
| A02B-0328-S837#4 | 32i-B Designation of Spindle Axes, 4 Spindles |
| A02B-0328-S837#5 | 32i-B Designation of Spindle Axes, 5 Spindles |
| A02B-0328-S837#6 | 32i-B Designation of Spindle Axes, 6 Spindles |
| A02B-0333-S837#1 | 35i-B Designation of Spindle Axes, 1 Spindle |
| A02B-0333-S837#2 | 35i-B Designation of Spindle Axes, 2 Spindles |
| A02B-0333-S837#3 | 35i-B Designation of Spindle Axes, 3 Spindles |
| A02B-0333-S837#4 | 35i-B Designation of Spindle Axes, 4 Spindles |
| A02B-0334-S837#1 | PM i-A Designation of Spindle Axes, 1 Spindle or No Spindle |
| A02B-0334-S837#2 | PM i-A Designation of Spindle Axes, 2 Spindles |
| A02B-0353-S837#1 | 30i-BP Designation of Spindles - 1 Spindle |
| A02B-0353-S837#10 | 30i-BP Designation of Spindles - 10 Spindles |
| A02B-0353-S837#11 | 30i-BP Designation of Spindles - 11 Spindles |
| A02B-0353-S837#12 | 30i-BP Designation of Spindles - 12 Spindles |
| A02B-0353-S837#13 | 30i-BP Designation of Spindles - 13 Spindles |
| A02B-0353-S837#14 | 30i-BP Designation of Spindles - 14 Spindles |
| A02B-0353-S837#15 | 30i-BP Designation of Spindles - 15 Spindles |
| A02B-0353-S837#16 | 30i-BP Designation of Spindles - 16 Spindles |
| A02B-0353-S837#17 | 30i-BP Designation of Spindles - 17 Spindles |
| A02B-0353-S837#18 | 30i-BP Designation of Spindles - 18 Spindles |
| A02B-0353-S837#19 | 30i-BP Designation of Spindles - 19 Spindles |
| A02B-0353-S837#2 | 30i-BP Designation of Spindles - 2 Spindles |
| A02B-0353-S837#20 | 30i-BP Designation of Spindles - 20 Spindles |
| A02B-0353-S837#21 | 30i-BP Designation of Spindles - 21 Spindles |
| A02B-0353-S837#22 | 30i-BP Designation of Spindles - 22 Spindles |
| A02B-0353-S837#23 | 30i-BP Designation of Spindles - 23 Spindles |
| A02B-0353-S837#24 | 30i-BP Designation of Spindles - 24 Spindles |
| A02B-0353-S837#3 | 30i-BP Designation of Spindles - 3 Spindles |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|------------------|----------------------------------------------|
| A02B-0353-S837#4 | 30i-BP Designation of Spindles - 4 Spindles |
| A02B-0353-S837#5 | 30i-BP Designation of Spindles - 5 Spindles |
| A02B-0353-S837#6 | 30i-BP Designation of Spindles - 6 Spindles |
| A02B-0353-S837#7 | 30i-BP Designation of Spindles - 7 Spindles |
| A02B-0353-S837#8 | 30i-BP Designation of Spindles - 8 Spindles |
| A02B-0353-S837#9 | 30i-BP Designation of Spindles - 9 Spindles |
| A02B-0356-S837#1 | 31i-B5P Designation of Spindles - 1 Spindle |
| A02B-0356-S837#2 | 31i-B5P Designation of Spindles - 2 Spindles |
| A02B-0356-S837#3 | 31i-B5P Designation of Spindles - 3 Spindles |
| A02B-0356-S837#4 | 31i-B5P Designation of Spindles - 4 Spindles |
| A02B-0356-S837#5 | 31i-B5P Designation of Spindles - 5 Spindles |
| A02B-0356-S837#6 | 31i-B5P Designation of Spindles - 6 Spindles |
| A02B-0356-S837#7 | 31i-B5P Designation of Spindles - 7 Spindles |
| A02B-0356-S837#8 | 31i-B5P Designation of Spindles - 8 Spindles |
| A02B-0357-S837#1 | 31i-BP Designation of Spindles - 1 Spindle |
| A02B-0357-S837#2 | 31i-BP Designation of Spindles - 2 Spindles |
| A02B-0357-S837#3 | 31i-BP Designation of Spindles - 3 Spindles |
| A02B-0357-S837#4 | 31i-BP Designation of Spindles - 4 Spindles |
| A02B-0357-S837#5 | 31i-BP Designation of Spindles - 5 Spindles |
| A02B-0357-S837#6 | 31i-BP Designation of Spindles - 6 Spindles |
| A02B-0357-S837#7 | 31i-BP Designation of Spindles - 7 Spindles |
| A02B-0357-S837#8 | 31i-BP Designation of Spindles - 8 Spindles |
| A02B-0358-S837#1 | 32i-BP Designation of Spindles - 1 Spindle |
| A02B-0358-S837#2 | 32i-BP Designation of Spindles - 2 Spindles |
| A02B-0358-S837#3 | 32i-BP Designation of Spindles - 3 Spindles |
| A02B-0358-S837#4 | 32i-BP Designation of Spindles - 4 Spindles |
| A02B-0358-S837#5 | 32i-BP Designation of Spindles - 5 Spindles |
| A02B-0358-S837#6 | 32i-BP Designation of Spindles - 6 Spindles |
| A02B-0358-S837#7 | 32i-BP Designation of Spindles - 7 Spindles |
| A02B-0358-S837#8 | 32i-BP Designation of Spindles - 8 Spindles |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

050

Controlled Axis

Designation of Servo Axes for Spindle Use

Features

Specify the number of servo axes for spindle use (movement command invalidity) in spindle control with servo motor. The number of servo axes for spindle use needs to be included in spindle axes specification. Spindle control with servo motor is required to use this option.

Benefits

- Simplification of the machine structure
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|------------------|-----------------------------------------------------------|
| A02B-0328-R710#1 | 32i-B Designation of Servo Axis for Spindle Use - 1 Axis |
| A02B-0328-R710#2 | 32i-B Designation of Servo Axis for Spindle Use - 2 Axes |
| A02B-0328-R710#3 | 32i-B Designation of Servo Axis for Spindle Use - 3 Axes |
| A02B-0328-R710#4 | 32i-B Designation of Servo Axis for Spindle Use - 4 Axes |
| A02B-0358-R710#1 | 32i-BP Designation of Servo Axis for Spindle Use - 1 Axis |
| A02B-0358-R710#2 | 32i-BP Designation of Servo Axis for Spindle Use - 2 Axes |
| A02B-0358-R710#3 | 32i-BP Designation of Servo Axis for Spindle Use - 3 Axes |
| A02B-0358-R710#4 | 32i-BP Designation of Servo Axis for Spindle Use - 4 Axes |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

051

Controlled Axis

Cs Contour Control

Features

The Cs Contour Control function controls the position of the serial spindle using the spindle motor in conjunction with a dedicated detector mounted on the spindle.

Cs Contour Control provides a higher precision than the spindle positioning function and enables positioning with other servo axes. Namely, Cs Contour Control enables linear interpolation between the spindle and servo axes.

The speed of the serial spindle is controlled by the spindle speed control function, while the spindle positioning is controlled by Cs Contour Control ("spindle contouring control"). Spindle speed control rotates the spindle using the velocity command, while the spindle contour control rotates the spindle using the move command.

Switching between spindle speed control and Cs Contour Control is performed by signals set in the PMC. In Cs Contour Control mode, the Cs Contour Control axis can be operated either manually or automatically, in the same way as normal servo axes.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF (Type 1), 0i-TF (all Types), 0i-MF Plus (Type 0, Type 1) and 0i-TF Plus (all Types).

Benefits

- High-precision positioning of the spindle
- Interpolation between the spindle axis and the feed axes

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0323-J852 | 30i-B CS Contour Control |
| A02B-0326-J852 | 31i-B5 CS Contour Control |
| A02B-0327-J852 | 31i-B CS Contour Control |
| A02B-0328-J852 | 32i-B CS Contour Control |
| A02B-0350-J852 | 0i-MFP CS Contour Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

052

Controlled Axis

Loader Control Function

Features

The Loader Control Function is used to control peripheral devices such as a loader that perform non-machining operations. With this function, the path for performing a loader control is added besides the machining paths. Up to 4 feed axes can be controlled in a loader path.

Benefits

- Simplifies programming of peripheral devices

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-R417 | 30i-B Function for Loader Control |
| A02B-0326-R417 | 31i-B5 Function for Loader Control |
| A02B-0327-R417 | 31i-B Function for Loader Control |
| A02B-0328-R417 | 32i-B Function for Loader Control |
| A02B-0339-R417 | 0i-TF Function for Loader Control |
| A02B-0340-R417 | 0i-MF Function for Loader Control |
| A02B-0349-R417 | 0i-TFP Function for Loader Control |
| A02B-0350-R417 | 0i-MFP Function for Loader Control |
| A02B-0353-R417 | 30i-BP Function for Loader Control |
| A02B-0356-R417 | 31i-B5P Function for Loader Control |
| A02B-0357-R417 | 31i-BP Function for Loader Control |
| A02B-0358-R417 | 32i-BP Function for Loader Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

053

Controlled Axis

Addition of Loader Control Path

Features

The Addition of Loader Control Path function enables to add a second loader control path for the control of peripheral axes. Up to 3 feed axes can be controlled in each loader path.

Note

The Loader Control Function is required to use this function.

Benefits

- Extend the application range of the Loader Control Function

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-R418 | 30i-B Addition of Loader Control Path |
| A02B-0326-R418 | 31i-B5 Addition of Loader Control Path |
| A02B-0327-R418 | 31i-B Addition of Loader Control Path |
| A02B-0328-R418 | 32i-B Addition of Loader Control Path |
| A02B-0339-R418 | 0i-TF Addition of Loader Control Path |
| A02B-0340-R418 | 0i-MF Addition of Loader Control Path |
| A02B-0349-R418 | 0i-TFP Addition of Loader Control Path |
| A02B-0350-R418 | 0i-MFP Addition of Loader Control Path |
| A02B-0353-R418 | 30i-BP Addition of Loader Control Path |
| A02B-0356-R418 | 31i-B5P Addition of Loader Control Path |
| A02B-0357-R418 | 31i-BP Addition of Loader Control Path |
| A02B-0358-R418 | 32i-BP Addition of Loader Control Path |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

054

Controlled Axis

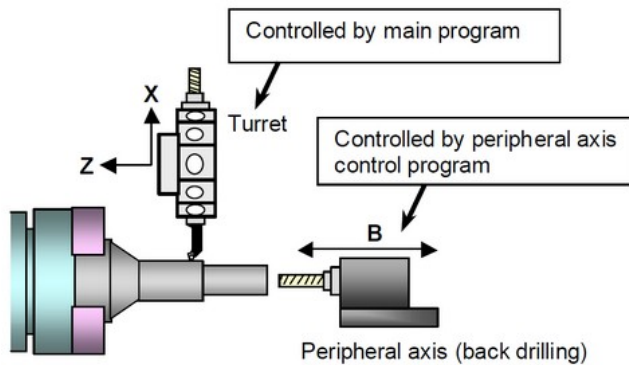

Peripheral Axis Control

Features

In addition to a main program, another program can execute during the automatic operation of the CNC. In this case, peripheral axes such as loader and back drilling can be controlled in parallel with a main program.

The Peripheral Axis Control function has three control groups:

- Peripheral axis control group 1
- Peripheral axis control group 2
- Peripheral axis control group 3

Each group can run independently. Therefore, in a multi-path system, peripheral axis control can be applied to each path independently by assigning different control groups for each path.

Benefits

- Increase of machine efficiency and productivity
- Speed up programming and CNC commissioning
- Complex motion commands are easier and faster to program

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-R725 | 30i-B Peripheral Axis Control |
| A02B-0326-R725 | 31i-B5 Peripheral Axis Control |
| A02B-0327-R725 | 31i-B Peripheral Axis Control |
| A02B-0328-R725 | 32i-B Peripheral Axis Control |
| A02B-0339-R725 | 0i-TF Peripheral Axis Control |
| A02B-0340-R725 | 0i-MF Peripheral Axis Control |
| A02B-0353-R725 | 30i-BP Peripheral Axis Control |
| A02B-0356-R725 | 31i-B5P Peripheral Axis Control |
| A02B-0357-R725 | 31i-BP Peripheral Axis Control |
| A02B-0358-R725 | 32i-BP Peripheral Axis Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

055

Controlled Axis

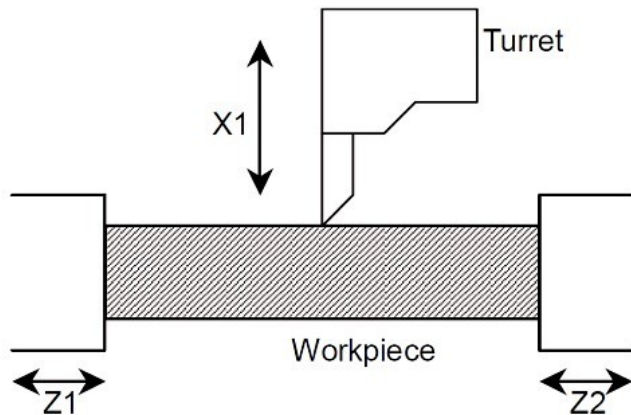

Synchronize Z2 in path 2 with Z1 in path1

Synchronous and Composite Control

Features

The Synchronous and Composite Control function enables an arbitrary axis of one path to be synchronized with an arbitrary axis of another path (synchronous control). In a multi-path control, movements are usually made on the axes of a path according to a move command for the path (independent control in each path).

With Synchronous and Composite Control, a move command for an arbitrary axis of one path and a move command for an arbitrary axis of another path can be exchanged with each other to make a movement on each axis (composite control).

By applying a move command for an axis (master axis) to a different arbitrary axis (slave axis), the movements on the two axes can be synchronized with each other. Whether to synchronize the movement on a slave axis with the move command for the master axis or make a movement on a slave according to the command for the slave can be chosen using the signal (synchronous control selection signal) from the PMC.

A move command for an arbitrary axis of one path and a move command for an arbitrary axis of another path can be exchanged with each other to make a movement on each axis.

Benefits

- Increase of machine efficiency and productivity
- Speed up programming and CNC commissioning
- Easier and faster programming
- Allows complex commands and synchronization between paths

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------|
| A02B-0323-S816 | 30i-B Synchronous and Composite Control for Multi-Path System |
| A02B-0326-S816 | 31i-B5 Synchronous and Composite Control for Multi-Path System |
| A02B-0327-S816 | 31i-B Synchronous and Composite Control for Multi-Path System |
| A02B-0328-S816 | 32i-B Synchronous and Composite Control for Multi-Path System |
| A02B-0339-S816 | 0i-TF Synchronous and Composite Control |
| A02B-0340-S816 | 0i-MF Synchronous and Composite Control |
| A02B-0349-S816 | 0i-TFP Synchronous and Composite Control |
| A02B-0350-S816 | 0i-MFP Synchronous and Composite Control |
| A02B-0353-S816 | 30i-BP Synchronous / Composite Control |
| A02B-0356-S816 | 31i-B5P Synchronous / Composite Control |
| A02B-0357-S816 | 31i-BP Synchronous / Composite Control |
| A02B-0358-S816 | 32i-BP Synchronous / Composite Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

056

Controlled Axis

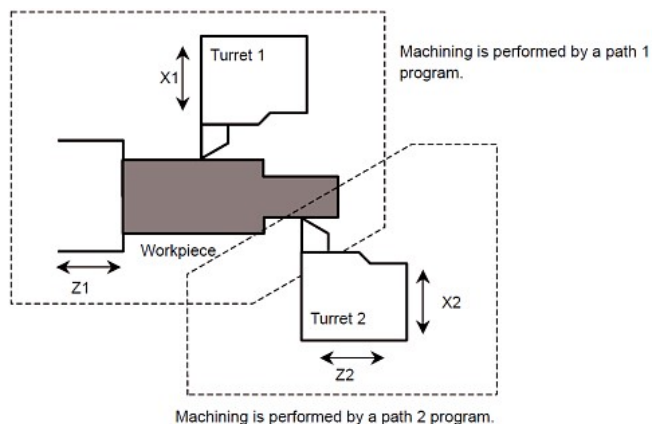

Superimposed Control

Features

Superimposed Control enables the travel distance on an arbitrary axis of one path to be superimposed on the travel distance on an arbitrary axis of another path. In multi-path control, usually, movements are made on the axes of path 1 according to a move command for path 1, and movements are made on the axes of path 2 according to a move command for path 2 (independent control in each path).

Superimposed control is very similar to synchronous control. In superimposed control however, a movement on the slave axis can be specified with a command for the path to which the slave axis belongs. The master axis and slave axis may belong to the same path, or the master axis may belong to one axis and the slave axis may belong to another. Moreover, multiple slave axes can be specified for one master axis. With the help of parameter settings, the move directions on the master axis and slave axis can be reversed from each other.

Example: in the image a move command for the Z1 axis of path 1 is superimposed on the travel distance on the Z2 axis of path 2.

Benefits

- Increase of machine efficiency and productivity
- Speed up programming and CNC commissioning
- Complex motion commands are easier and faster to program

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-S818 | 30i-B Superimposed Control |
| A02B-0326-S818 | 31i-B5 Superimposed Control |
| A02B-0327-S818 | 31i-B Superimposed Control |
| A02B-0328-S818 | 32i-B Superimposed Control |
| A02B-0339-S818 | 0i-TF Superimposed Control |
| A02B-0340-S818 | 0i-MF Superimposed Control |
| A02B-0349-S818 | 0i-TFP Superimposed Control |
| A02B-0350-S818 | 0i-MFP Superimposed Control |
| A02B-0353-S818 | 30i-BP Superimposed Control |
| A02B-0356-S818 | 31i-B5P Superimposed Control |
| A02B-0357-S818 | 31i-BP Superimposed Control |
| A02B-0358-S818 | 32i-BP Superimposed Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

057

Controlled Axis

Superimposed Control A

Features

For a slave axis under superimposed control, a travel distance specified by the program for the master axis path is added to a travel distance specified by the program for the slave axis path.

As a consequence, the actual speed on a slave axis is significantly higher than the ordinary speed ("ordinary speed" means a speed such as a parameter-set rapid traverse rate).

To prevent this, feedrates and a linear acceleration / deceleration time constant in rapid traverse can be set for use only during superimposed control with this function.

Benefits

- Simplifies the control in superimposed mode

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-R538 | 30i-B Superimposed Control A |
| A02B-0326-R538 | 31i-B5 Superimposed Control A |
| A02B-0327-R538 | 31i-B Superimposed Control A |
| A02B-0328-R538 | 32i-B Superimposed Control A |
| A02B-0339-R538 | 0i-TF Superimposed Control A |
| A02B-0340-R538 | 0i-MF Superimposed Control A |
| A02B-0349-R538 | 0i-TFP Superimposed Control A |
| A02B-0350-R538 | 0i-MFP Superimposed Control A |
| A02B-0353-R538 | 30i-BP Superimposed Control A |
| A02B-0356-R538 | 31i-B5P Superimposed Control A |
| A02B-0357-R538 | 31i-BP Superimposed Control A |
| A02B-0358-R538 | 32i-BP Superimposed Control A |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

058

Controlled Axis

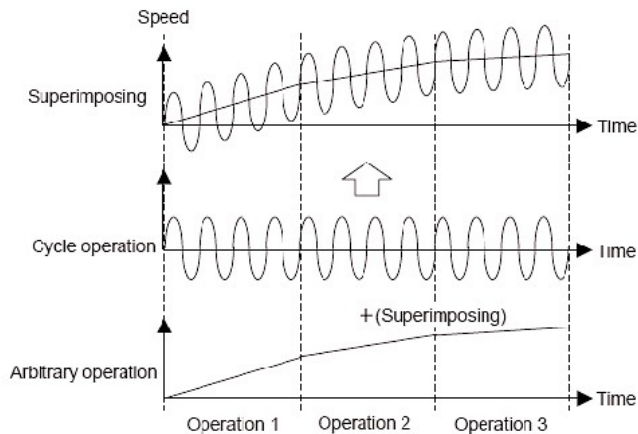

Superimposed Control for High-Speed Cycle Machining

Features

The Superimposed Control for High-Speed Cycle Machining function can perform superimposing upon an axis executing high-speed cycle machining or high-speed binary operation, from another path.

Independent arbitrary operation (cutting command) can be superimposed on a cycle operation that uses high-speed cycle machining (contour command or oscillation command).

Learning control can be used in high-speed cycle machining and high-speed binary operation.

Benefits

- Increase of machine efficiency and productivity
- Speed up programming and CNC commissioning
- Easier and faster programming
- Allows complex movements issued from the superimposition of arbitrary moves with high-speed operations

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-R554 | 30i-B High-Speed Cycle Machining - Superimposed Control |
| A02B-0326-R554 | 31i-B5 High-Speed Cycle Machining - Superimposed Control |
| A02B-0327-R554 | 31i-B High-Speed Cycle Machining - Superimposed Control |
| A02B-0353-R554 | 30i-BP Superimposed Control for High-Speed Cycle Machining |
| A02B-0356-R554 | 31i-B5P Superimposed Control for High-Speed Cycle Machining |
| A02B-0357-R554 | 31i-BP Superimposed Control for High-Speed Cycle Machining |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

059

Controlled Axis

Synchronous, Composite and Superimposed Control by Program Command

Features

The Synchronous, Composite and Superimposed Control function can be started or canceled using G-codes in the part program instead of being activated through digital input signals.

It is also possible to perform these controls using digital input signals in addition.

Example

- G51.4 P_ Q_ (L_); Start synchronous control
- G50.4 Q_ ; Cancel synchronous control
- G51.5 P_ Q_ ; Start composite control
- G50.5 P_ Q_ ; Cancel composite control
- G51.6 P_ Q_ ; Start superimposed control
- G50.6 Q_ ; Cancel superimposed control

Benefits

- Flexibility of the machine configuration
- Behaviour change without writing a specific PMC program
- Compatibility with Series 16i function

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------|
| A02B-0323-S890 | 30i-B Synchronous, Composite and Superimposed Control by Program Command |
| A02B-0326-S890 | 31i-B5 Synchronous, Composite and Superimposed control by Program Command |
| A02B-0327-S890 | 31i-B Synchronous, Composite and Superimposed Control by Program Command |
| A02B-0328-S890 | 32i-B Synchronous, Composite and Superimposed Control by Program Command |
| A02B-0339-S890 | 0i-TF Synchronous, Composite & Super Imposed Control by CNC Program |
| A02B-0340-S890 | 0i-MF Synchronous, Composite & Super Imposed Control by CNC Program |
| A02B-0349-S890 | 0i-TFP Synchronous, Composite, and Superimposed Control by CNC Program |
| A02B-0350-S890 | 0i-MFP Synchronous, Composite, and Superimposed Control by CNC Program |
| A02B-0353-S890 | 30i-BP Synchronous, Composite and Superimposed Control by Program Command |
| A02B-0356-S890 | 31i-B5P Synchronous, Composite and Superimposed Control by Program Command |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

060

| Specification | Description |
|----------------|---------------------------------------------------------------------------|
| A02B-0357-S890 | 31i-BP Synchronous, Composite and Superimposed Control by Program Command |
| A02B-0358-S890 | 32i-BP Synchronous, Composite and Superimposed Control by Program Command |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

061

Controlled Axis

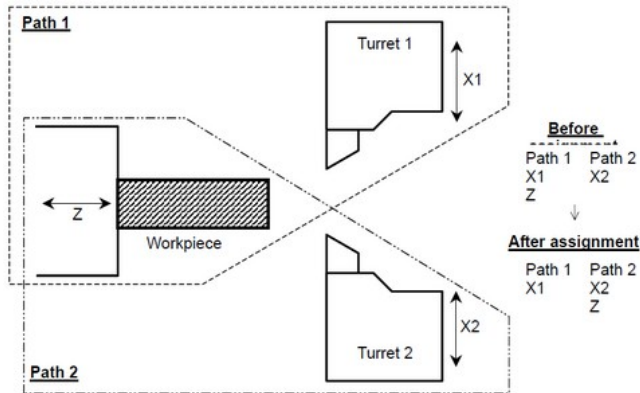

Flexible Path Axis Assignment

Features

The Flexible Path Axis Assignment function enables to disconnect each control axis from the control of each path and to assign the axis as a controlled axis to other path.

When using this function, an axis can be controlled in multiple paths.

The use of a dummy axis as intermediate is not required when using this function, as axis configuration can be changed directly.

Benefits

- High flexibility of the machine configuration and axis usage
- Increase of machine efficiency and productivity
- Speed up programming and CNC commissioning

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-R607 | 30i-B Flexible Path Axis Assignment |
| A02B-0326-R607 | 31i-B5 Flexible Path Axis Assignment |
| A02B-0327-R607 | 31i-B Flexible Path Axis Assignment |
| A02B-0328-R607 | 32i-B Flexible Path Axis Assignment |
| A02B-0333-R404 | 35i-B Flexible Path Axis Assignment |
| A02B-0339-R607 | 0i-TF Flexible Path Axis Assignment |
| A02B-0340-R607 | 0i-MF Flexible Path Axis Assignment |
| A02B-0349-R607 | 0i-TFP Flexible Path Axis Assignment |
| A02B-0350-R607 | 0i-MFP Flexible Path Axis Assignment |
| A02B-0353-R607 | 30i-BP Flexible Path Axis Assignment |
| A02B-0356-R607 | 31i-B5P Flexible Path Axis Assignment |
| A02B-0357-R607 | 31i-BP Flexible Path Axis Assignment |
| A02B-0358-R607 | 32i-BP Flexible Path Axis Assignment |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

062

Controlled Axis

Axis Synchronous Control

Features

The Axis Synchronous function allows up to 4 master/slave servo motor pairs to perform synchronized motion. This feature is typically used on gantry or split table axes.


This function is a basic function in FANUC Series 0i-F (Type 1) and 0i-F Plus (Type 0, Type 1).

Benefits

- Machining of large work piece
- Each table can also be independently or synchronized controlled during normal operation
- Up to four axis can be synchronously controlled

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------------|
| A02B-0323-J843 | 30i-B Axis Synchronous Control - Incl. Tandem Control |
| A02B-0326-J843 | 31i-B5 Axis Synchronous Control - Incl. Tandem Control |
| A02B-0327-J843 | 31i-B Axis Synchronous Control - Incl. Tandem Control |
| A02B-0328-J843 | 32i-B Axis Synchronous Control - Incl. Tandem Control |
| A02B-0333-J843 | 35i-B Axis Synchronous Control (Max. 8 Axis Pairs) - Incl. Tandem Control |
| A02B-0334-J843 | PM i-A Axis Synchronous Control - Incl. Tandem Control (max. 16 Axis Pairs) |
| A02B-0349-J843 | 0i-TFP Axis Synchronisation Control |
| A02B-0350-J843 | 0i-MFP Axis Synchronisation Control |
| A02B-0353-J843 | 30i-BP Axis Synchronous Control |
| A02B-0356-J843 | 31i-B5P Axis Synchronous Control |
| A02B-0357-J843 | 31i-BP Axis Synchronous Control |
| A02B-0358-J843 | 32i-BP Axis Synchronous Control |

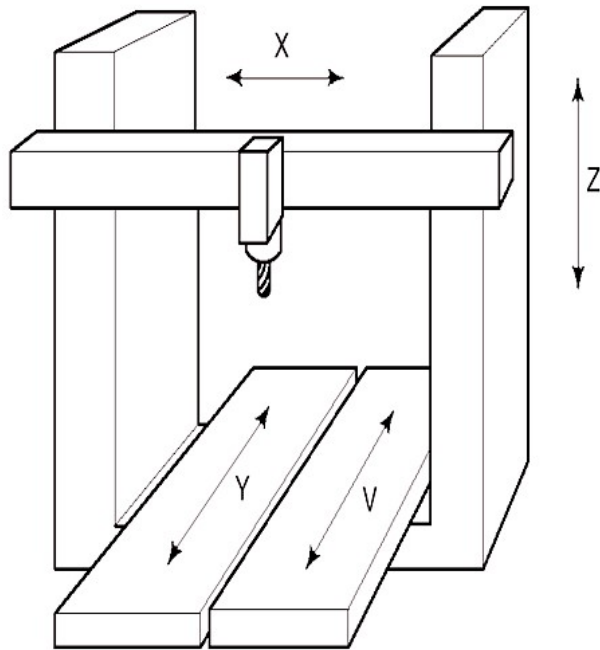

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

063

Controlled Axis

Twin Table Control

Features

The Twin Table Control function allows two specified axes to be switched between synchronous, independent, or normal operation, using the appropriate switches on the machine operator's panel.

Benefits

- Flexible operation selection
- Increase of machine efficiency and productivity
- Speed up programming and CNC commissioning

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0323-J698 | 30i-B Twin Table Control |
| A02B-0326-J698 | 31i-B5 Twin Table Control |
| A02B-0327-J698 | 31i-B Twin Table Control |
| A02B-0328-J698 | 32i-B Twin Table Control |
| A02B-0340-J698 | 0i-MF Twin Table Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

064

Controlled Axis

Parallel Axis Control

Features

When a machine tool is featuring multiple heads and multiple tables, machining multiple workpieces with the same shape at the same time on these multiple tables, multiple controlled axes having the same axis name can be operated at the same time by the use of a move command that specifies only one program axis.

This operation is called parallel operation. Two or more axes which operate in parallel at the same time upon the execution of a command that specifies only one program axis are called parallel axes.

The Parallel Axis Control function is effective in MEM mode, MDI mode, and manual numeric commands in machining center with one path. In manual operation, the parallel function can not be used. Each controlled axis operates independently.


In parallel operation, controlled axes related to one program axis operate in the same way. With the use of an input signal sent from the machine side, only the specified axis is selected among multiple parallel axes and operated (parking).

Notes:

Parallel axis control function is limited to machining center with one path only.

Parallel axis control function does not support the following motion functions:

- Smooth interpolation
- Nano smoothing
- 3-dimensional coordinate system conversion
- 3-dimensional tool compensation
- Tool length compensation in tool axis direction
- Tool center point control
- Tool posture control
- 3-dimensional cutter compensation
- Tilted working plane indexing
- Nano smoothing 2
- Workpiece setting error compensation
- Tandem control
- Feed axis synchronization control
- Twin table control
- Synchronous / Composite control
- Superimposed Control

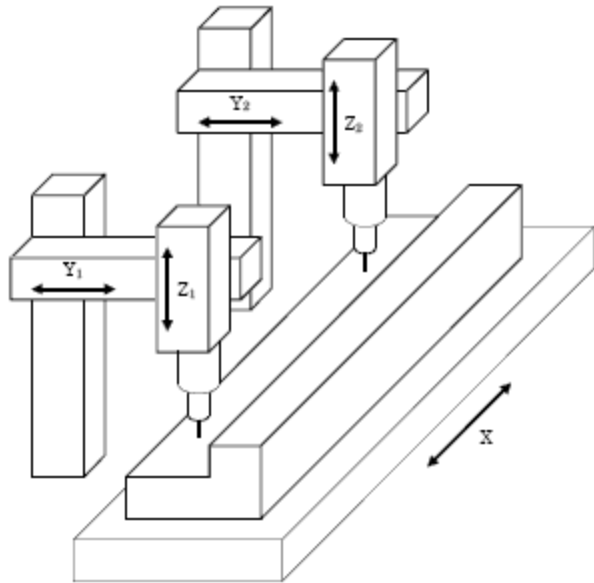

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

065

Benefits

- Simple and effective implementation of machines performing parallel machining or multiple boring / drilling stations
- Increase machine efficiency and productivity
- Simplified programming of the machining cycles
- Speeds up CNC and machine commissioning

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-R509 | 30i-B Parallel Axis Control |
| A02B-0326-R509 | 31i-B5 Parallel Axis Control |
| A02B-0327-R509 | 31i-B Parallel Axis Control |
| A02B-0353-R509 | 30i-BP Parallel Axis Control |
| A02B-0356-R509 | 31i-B5P Parallel Axis Control |
| A02B-0357-R509 | 31i-BP Parallel Axis Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

066

Controlled Axis

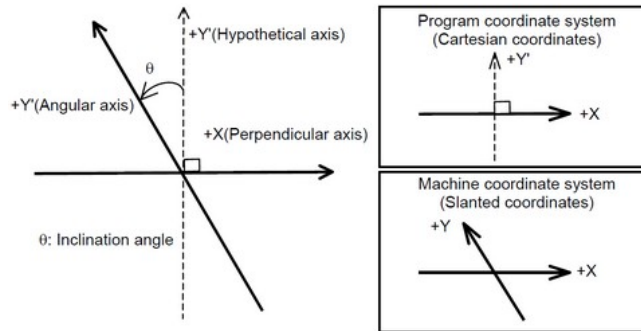

Arbitrary Angular Axis Control

Features

When the angular axis installed makes an angle other than 90° with the perpendicular axis, the angular axis control function can control the distance traveled along each axis according to the inclination angle, as if the angular axis makes an angle of 90° with the perpendicular axis.

Arbitrary axes can be specified as a set of an angular axis and perpendicular axis by parameter setting. The actual distance traveled is controlled according to an inclination angle. However, a program, when created, assumes that the angular axis and perpendicular axis intersect at right angles.

Benefits

- Increase machine efficiency and productivity
- Simplified programming of the machining cycles
- Speeds up CNC and machine commissioning

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J924 | 30i-B Arbitrary Angular Axis Control |
| A02B-0326-J924 | 31i-B5 Arbitrary Angular Axis Control |
| A02B-0327-J924 | 31i-B Arbitrary Angular Axis Control |
| A02B-0328-J924 | 32i-B Arbitrary Angular Axis Control |
| A02B-0339-J924 | 0i-TF Angular Axis Control |
| A02B-0340-J924 | 0i-MF Angular Axis Control |
| A02B-0349-J924 | 0i-TFP Angular Axis Control |
| A02B-0350-J924 | 0i-MFP Angular Axis Control |
| A02B-0353-J924 | 30i-BP Arbitrary Angular Axis Control |
| A02B-0356-J924 | 31i-B5P Arbitrary Angular Axis Control |
| A02B-0357-J924 | 31i-BP Arbitrary Angular Axis Control |
| A02B-0358-J924 | 32i-BP Arbitrary Angular Axis Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

067

Controlled Axis

Inclined Rotary Axis Control

Features

The Inclined Rotary Axis Control function can be used in conjunction with following 5-axes control capabilities:

- Tilted Working Plane Command (TWP)
- Tool Center Point Control (TCP)
- 3-Dimensional Cutter/Radius Compensation
- 3-Dimensional Manual Feed




This function can be used on machines where the tool rotation axis or the table rotation axis is inclined with respect to the X-Y plane, a Y-Z plane or a Z-X plane of the machine coordinate system.

Benefits

- Supports 5-Axes functions on machines with non-orthogonal primary linear axes

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-S688 | 30i-B Inclined Rotary Axis Control |
| A02B-0326-S688 | 31i-B5 Inclined Rotary Axis Control |
| A02B-0327-S688 | 31i-B Inclined Rotary Axis Control |
| A02B-0328-S688 | 32i-B Inclined Rotary Axis Control |
| A02B-0340-S688 | 0i-MF Inclined Rotary Axis Control |
| A02B-0350-S688 | 0i-MFP Inclined Rotary Axis Control |
| A02B-0353-S688 | 30i-BP Inclined Rotary Axis Control |
| A02B-0356-S688 | 31i-B5P Inclined Rotary Axis Control |
| A02B-0357-S688 | 31i-BP Inclined Rotary Axis Control |
| A02B-0358-S688 | 32i-BP Inclined Rotary Axis Control |




Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

068

Controlled Axis

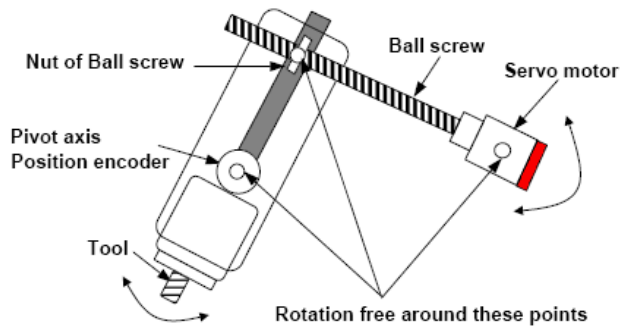

Pivot Axis Control

Features

The Pivot Axis Control function allows to control a pivot axis (B-axis) by a ball screw connected to a servo motor, which direction is free.

Generally, the relation between the rotating angle of motor and the position of rotation axis on the machine is proportional. When using this function, the rotation angle of the motor is not proportional to the rotation angle of the pivot axis (B-axis) on the machine.

The position command is output to drive the servo motor, and the position encoder is mounted to follow the rotation angle of pivot axis (B-axis). The speed of pivot axis (B-axis) may fluctuate; to decrease the fluctuation and keep the actual position gain constant, the function changes the position gain of the motor according to the position of pivot axis (B-axis).

Benefits

- Simple and effective implementation of complex pivotal systems
- Increase machine efficiency and productivity
- Simplified programming of the machining cycles
- Speeds up CNC and machine commissioning

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-S665 | 30i-B Pivot Axis Control |
| A02B-0326-S665 | 31i-B5 Pivot Axis Control |
| A02B-0327-S665 | 31i-B Pivot Axis Control |
| A02B-0328-S665 | 32i-B Pivot Axis Control |
| A02B-0353-S665 | 30i-BP Pivot Axis Control |
| A02B-0356-S665 | 31i-B5P Pivot Axis Control |
| A02B-0357-S665 | 31i-BP Pivot Axis Control |
| A02B-0358-S665 | 32i-BP Pivot Axis Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

069

Controlled Axis

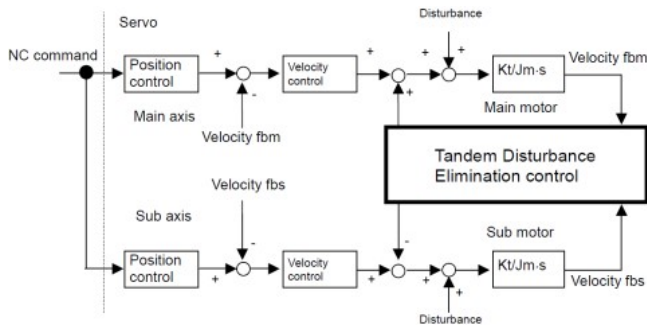

Tandem Disturbance Elimination Control

Features

This function suppresses vibration caused by interferences between the main axis and the sub-axis in a position tandem control (feed axis synchronization).

Note

The axis synchronous control function is required.

Benefits

- Simple and effective implementation of vibration suppression on a tandem machine
- Increase machining quality, efficiency and productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-S660 | 30i-B Tandem Disturbance Elimination Control |
| A02B-0326-S660 | 31i-B5 Tandem Disturbance Elimination Control |
| A02B-0327-S660 | 31i-B Tandem Disturbance Elimination Control |
| A02B-0328-S660 | 32i-B Tandem Disturbance Elimination Control |
| A02B-0333-S660 | 35i-B Tandem Disturbance Elimination Control |
| A02B-0334-S660 | PM i-A Tandem Disturbance Elimination Control |
| A02B-0339-S660 | 0i-TF Tandem Disturbance Elimination Control |
| A02B-0340-S660 | 0i-MF Tandem Disturbance EliminationControl |
| A02B-0349-S660 | 0i-TFP Tandem Disturbance Elimination Control |
| A02B-0350-S660 | 0i-MFP Tandem Disturbance Elimination Control |
| A02B-0353-S660 | 30i-BP Tandem Disturbance Elimination Control |
| A02B-0356-S660 | 31i-B5P Tandem Disturbance Elimination Control |
| A02B-0357-S660 | 31i-BP Tandem Disturbance Elimination Control |
| A02B-0358-S660 | 32i-BP Tandem Disturbance Elimination Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

070

Controlled Axis

Pole Position Detection Function

Features

When FANUC DiS (torque) motors, FANUC LiS (linear) motors or 3rd party motors are driven by a FANUC servo system, the Pole Position Detection function allows the proper detection of the position of magnetic poles.

This function is a basic function in FANUC Series 30i-B Plus.

Notes

- This function cannot be used with a vertical axis to which force is applied at all times
- This function cannot be used with an axis when the axis is completely locked

Benefits

- Detection of magnetic poles of FANUC DiS (torque) and LiS (linear) servo motors
- Detection of magnetic poles of 3rd party servo motors with a FANUC servo amplifier system
- Speeds up CNC and machine commissioning

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-S744 | 30i-B Pole Position Detection Function |
| A02B-0326-S744 | 31i-B5 Pole Position Detection Function |
| A02B-0327-S744 | 31i-B Pole Position Detection Function |
| A02B-0328-S744 | 32i-B Pole Position Detection Function |
| A02B-0333-S744 | 35i-B Pole Position Detection Function |
| A02B-0334-S744 | PM i-A Pole Position Detection Function |
| A02B-0339-S744 | 0i-TF Pole Position Detection Function |
| A02B-0340-S744 | 0i-MF Pole Position Detection Function |
| A02B-0349-S744 | 0i-TFP Pole Position Detection Function |
| A02B-0350-S744 | 0i-MFP Pole Position Detection Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

071

Controlled Axis

Control Axis Detach

Features

With the Controlled Axes Detach function, an entire axis, including servo motor and feedback, can be "detached" or disabled from the machine and the control system without creating any alarm.

This function is a basic function in FANUC Series 0i-F (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- Typically used for fourth axis such as rotary table, right angle head
- Easy to implement a plug and play solution without operator intervention with the machine controller
- Position display shows the attached axis positions
- Easy to use for production adaptability and flexibility

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-J807 | 30i-B Axes Detach |
| A02B-0326-J807 | 31i-B5 Axes Detach |
| A02B-0327-J807 | 31i-B Axes Detach |
| A02B-0328-J807 | 32i-B Axes Detach |
| A02B-0349-J807 | 0i-TFP Control Axis Detach |
| A02B-0350-J807 | 0i-MFP Control Axis Detach |
| A02B-0353-J807 | 30i-BP Control Axis Detach |
| A02B-0356-J807 | 31i-B5P Control Axis Detach |
| A02B-0357-J807 | 31i-BP Control Axis Detach |
| A02B-0358-J807 | 32i-BP Control Axis Detach |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

072

Controlled Axis

Dual Control Axes Switching

Features

With the Dual Control Axes Switching function, it is possible to allocate two control axes to one motor. When the two allocated control axes are in controlled axes detach, the axes can be switched. As a result, one motor can have two independent axes settings such as parameters, compensation, and custom macro system variables.

Note

Dual Control Axes Switching cannot be used together with Dual Check Safety.

This function includes the Controlled Axes Detach function.

Benefits

- Use attachments with e.g. different gear ratios by one motor

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-R390 | 30i-B Dual Control Axes Switching |
| A02B-0326-R390 | 31i-B5 Dual Control Axes Switching |
| A02B-0327-R390 | 31i-B Dual Control Axes Switching |
| A02B-0328-R390 | 32i-B Dual Control Axes Switching |
| A02B-0339-R390 | 0i-TF Dual Control Axes Switching |
| A02B-0340-R390 | 0i-MF Dual Control Axes Switching |
| A02B-0349-R390 | 0i-TFP Dual Control Axes Switching |
| A02B-0350-R390 | 0i-MFP Dual Control Axes Switching |
| A02B-0353-R390 | 30i-BP Dual Control Axes Switching |
| A02B-0356-R390 | 31i-B5P Dual Control Axes Switching |
| A02B-0357-R390 | 31i-BP Dual Control Axes Switching |
| A02B-0358-R390 | 32i-BP Dual Control Axes Switching |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

073

Controlled Axis

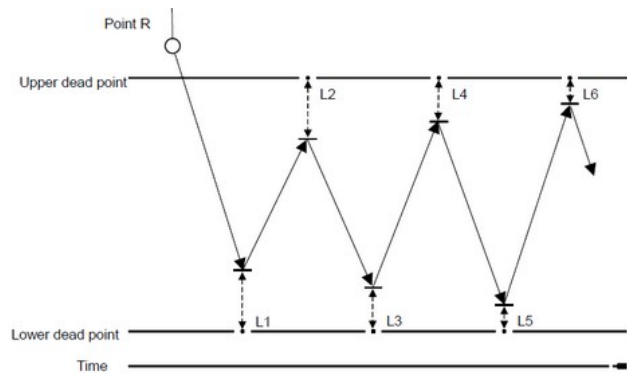

Chopping

Features

The Chopping function controls an up and down motion for side face grinding while servo delay compensation is used to minimize errors at upper and lower dead points (end points).

A chopping cycle is activated by the G81.1 command or a PMC signal; a G80 command cancels this chopping cycle. Parameters are used to specify the movement itself.

Benefits

- Allows complex gear cutting/grinding operations
- Simplifies programming

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0323-J707 | 30i-B Chopping Function |
| A02B-0326-J707 | 31i-B5 Chopping Function |
| A02B-0327-J707 | 31i-B Chopping Function |
| A02B-0328-J707 | 32i-B Chopping Function |
| A02B-0339-J707 | 0i-TF Chopping Function |
| A02B-0340-J707 | 0i-MF Chopping Function |
| A02B-0349-J707 | 0i-TFP Chopping Function |
| A02B-0350-J707 | 0i-MFP Chopping Function |
| A02B-0353-J707 | 30i-BP Chopping Function |
| A02B-0356-J707 | 31i-B5P Chopping Function |
| A02B-0357-J707 | 31i-BP Chopping Function |
| A02B-0358-J707 | 32i-BP Chopping Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

074

Controlled Axis

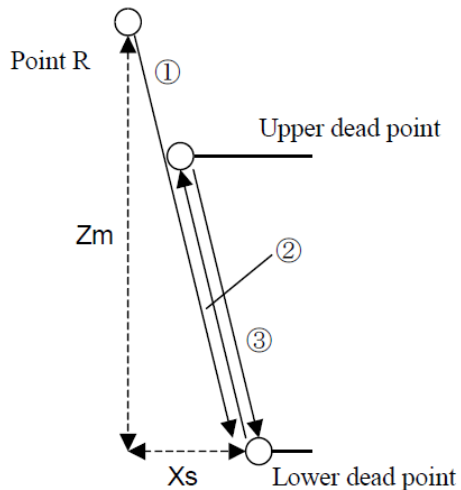

Movement process :

(1): Movement from point R to lower dead point

(2): Movement from lower dead point to upper dead point

(3): Movement from upper dead point to lower dead point

After (1), repeat (2) and (3).

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Chopping Function by Flexible Synchronous Control

Features

The Chopping Function by Flexible Synchronous Control allows to use the Chopping function together with Flexible Synchronization Control. This enables chopping on two axes simultaneously. It is possible to synchronize an axis with a chopping axis.

This function enables to override the commanded gear ratio of Flexible Synchronous Control. The actual gear ratio is obtained by multiplying the commanded gear ratio with an override signal. The range of the override signal is 0% to 254%.

Note

The options Flexible Synchronous Control and Chopping are not necessary to use this option. This function cannot be specified for Lathe systems.

Benefits

- Expands the application range of the chopping function
- Suitable for processing inclined surfaces with a grinder

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------|
| A02B-0323-R547 | 30i-B Chopping Function by Flexible Synchronous Control |
| A02B-0326-R547 | 31i-B5 Chopping Function by Flexible Synchronous Control |
| A02B-0327-R547 | 31i-B Chopping Function by Flexible Synchronous Control |
| A02B-0328-R547 | 32i-B Chopping Function by Flexible Synchronous Control |
| A02B-0353-R547 | 30i-BP Chopping Function by Flexible Synchronous Control |
| A02B-0356-R547 | 31i-B5P Chopping Function by Flexible Synchronous Control |
| A02B-0357-R547 | 31i-BP Chopping Function by Flexible Synchronous Control |
| A02B-0358-R547 | 32i-BP Chopping Function by Flexible Synchronous Control |

075

Controlled Axis

| CHOPPING DATA | |
|-----------------------|-------------|
| (SETTING DATA) | |
| R1(START) POINT | = 110.0000 |
| UPPER DEAD POINT | = 100.0000 |
| LOWER DEAD POINT | = 75.0000 |
| CHOPPING FEED RATE | = 1000.0000 |
| CHOPPING AXIS | = 1 |
| R-APPROACH RATE | = 1000.0000 |
| R2(END) POINT | = 115.0000 |
| HOME POINT | = 120.0000 |
| TOGGLE HOME FEED RATE | = 1000.0000 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Chopping Setting Screen

Features

The Chopping Setting Screen extends the chopping function with additional features:

- Various chopping parameters can be set by the chopping setting screen.
- The feedrate from the start point to the chopping reference point (approach rate) can be set independently.
- The moving direction of the chopping axis can be changed during the chopping operation by direction change signals.
- The end position of the chopping axis (R2 point) can be set independently.
- An additional servo delay compensation method is added, where the chopping feedrate is not changed.
- Chopping data such as stroke count etc. can be queried by the PMC.

The Chopping function or the Chopping Function by Flexible Synchronization Control is required to use this function.

Benefits


- Simplifies the operation of the chopping function
- Expands application range of the chopping function

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-R614 | 30i-B Chopping Function Setting Screen |
| A02B-0326-R614 | 31i-B5 Chopping Function Setting Screen |
| A02B-0327-R614 | 31i-B Chopping Function Setting Screen |
| A02B-0328-R614 | 32i-B Chopping Function Setting Screen |
| A02B-0353-R614 | 30i-BP Chopping Function Setting Screen |
| A02B-0356-R614 | 31i-B5P Chopping Function Setting Screen |
| A02B-0357-R614 | 31i-BP Chopping Function Setting Screen |
| A02B-0358-R614 | 32i-BP Chopping Function Setting Screen |

076

Controlled Axis

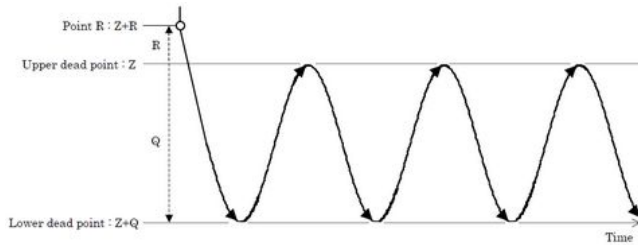

High-Precision Oscillation Function

Features

In this function, the feedrate of an oscillation axis (equivalent to a chopping axis that is moved vertically and repeatedly for grinding) changes along a sine curve.

This function is effective to improve the accuracy of movement between upper dead point and lower dead point.

In addition, the look-ahead feed forward function can be used with oscillation motion; in this case a higher accuracy can be achieved even if the oscillation feedrate or the upper or lower dead point are changed.

Benefits

- Simplification of the programming
- Increase of the precision and productivity of the machine

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R662 | 30i-B High Precision Oscillation Function |
| A02B-0326-R662 | 31i-B5 High Precision Oscillation Function |
| A02B-0327-R662 | 31i-B High Precision Oscillation Function |
| A02B-0328-R662 | 32i-B High Precision Oscillation Function |
| A02B-0339-R662 | 0i-TF High Precision Oscillation Function |
| A02B-0340-R662 | 0i-MF High Precision Oscillation Function |
| A02B-0349-R662 | 0i-TFP High Precision Oscillation Function |
| A02B-0350-R662 | 0i-MFP High Precision Oscillation Function |
| A02B-0353-R662 | 30i-BP High Precision Oscillation Function |
| A02B-0356-R662 | 31i-B5P High Precision Oscillation Function |
| A02B-0357-R662 | 31i-BP High Precision Oscillation Function |
| A02B-0358-R662 | 32i-BP High Precision Oscillation Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

077

Controlled Axis

PMC Axis Control - Acceleration/Deceleration Specification Feed

Features

The PMC Axis Control - Acceleration/Deceleration Specification Feed function allows to specify the acceleration and the deceleration of an PMC-controlled axis motion independently.

The Axis Control by PMC function is necessary to use this function.

Benefits

- Extends the application range of the Axis Control by PMC function

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0323-R640 | 30i-B PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0326-R640 | 31i-B5 PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0327-R640 | 31i-B PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0328-R640 | 32i-B PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0333-R640 | 35i-B PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0334-R640 | PM i-A PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0339-R640 | 0i-TF PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0340-R640 | 0i-MF PMC Axis Control - Acceleration/Deceleration Specification Feed |
| A02B-0349-R640 | 0i-TFP PMC Axis Control Acceleration / Deceleration Specification Feed |
| A02B-0350-R640 | 0i-MFP PMC Axis Control Acceleration / Deceleration Specification Feed |
| A02B-0353-R640 | 30i-BP PMC Axis Control Acceleration / Deceleration Specification Feed |
| A02B-0356-R640 | 31i-B5P PMC Axis Control Acceleration / Deceleration Specification Feed |
| A02B-0357-R640 | 31i-BP PMC Axis Control Acceleration / Deceleration Specification Feed |
| A02B-0358-R640 | 32i-BP PMC Axis Control Acceleration / Deceleration Specification Feed |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

078

Controlled Axis

Servo-On Synchronize Function

Features

Conventionally, for a coasting axis under a servo-off condition, when the servo-off signal is released to set a servo-on condition while a move command is entered, a step for canceling an accumulated amount of servo position error is triggered. The step involves abrupt deceleration and then acceleration, preventing a smooth start of the move command.

This feed function uses the actual rate at the instant of servo-on condition setting as an initial rate, thereby starting operation smoothly at a specified acceleration or deceleration.

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0334-R395 | PM i-A Servo-On Synchronize Function |

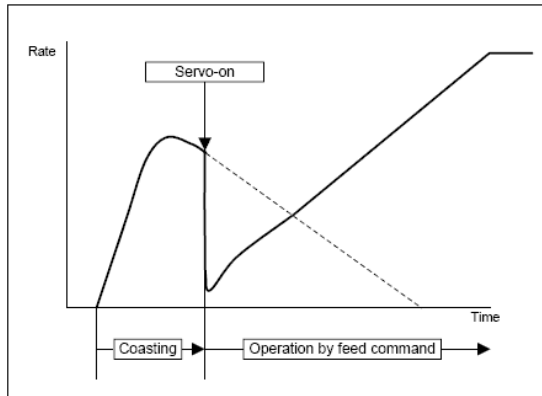


Fig. 1 Conventional Operation

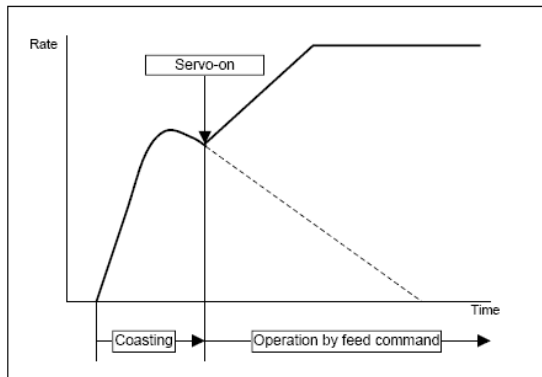


Fig. 2 Operation with Servo-on Synchronize Function

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

079

Controlled Axis

Multi-Axes Synchronous Function (Power Motion i-A)

Features

The multi-axes synchronous function allows axes (child axes) to synchronously follow up the operation of a reference axis (parent axis) with a certain speed ratio (gear ratio)

This function not only facilitates simplification of gears and other mechanism but also allows the speed ratio to be changed freely during operation, therefore enabling operations that could not be performed with conventional mechanisms.

Benefits

- Since the speed ratio (gear ratio) is determined by command data of the PMC axis control, operations that frequently change the gear ratio or the direction of movement can be performed.
- The speed ratio (gear ratio) is set by specifying the amount of a parent-axis movement and the amount of a child-axis movement separately rather than specifying a ratio directly, so the problem of fraction processing does not occur. As a result, the synchronization relationship does not deviate even after rotation is performed continuously.
- Axes can have a hierarchical structure not only having a parent-child relationship but also having grandchildren and further lower levels as long as the maximum allowable number of axes is not exceeded.
- The parent-child relationship of axes is established by setting parameters considering safety.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0334-R403 | PM i-A Multi-Axes Synchronous Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

080

Controlled Axis

Multi-Axes High-Response Function

Features

The Multi-Axes High-Response Function adds a high-response mode to the control. The cycle time to check external signals in high-response mode is faster than in normal mode. Therefore, if a program is executed in high-response mode, the axes can be started or stopped with external signal faster than in normal mode. Programs have to be compiled before they can be executed in high-response mode. Up to 24 programs can be executed simultaneously.

Benefits

- Reduces cycle time and increases productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0334-R396 | PM i-A Multi-Axes High-Response Function (Max. 1 Path / 24 Axes) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

081

Controlled Axis

Skip Function for Multi-Axes High-Response Function

Features

The Skip Function for Multi-Axes High-Response Function allows to use the skip function in the high-response mode. With this, it is possible to measure workpiece position and dimension in high-response mode.

Note

The Multi-Axes High-Response Function is necessary to use this function.

Benefits

- Extends the application range of the Multi-Axes High-Response Function

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------------------|
| A02B-0334-R398 | PM i-A Skip Function for Multi-Axes High-Response Function (Max. 24 Skip Signals) |



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

082

Controlled Axis

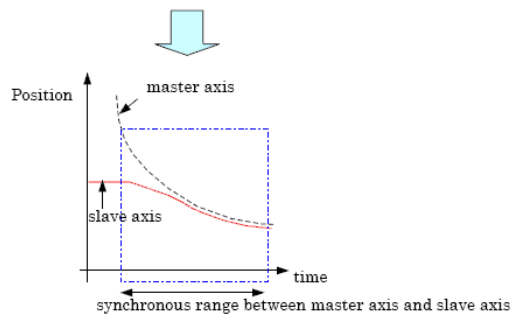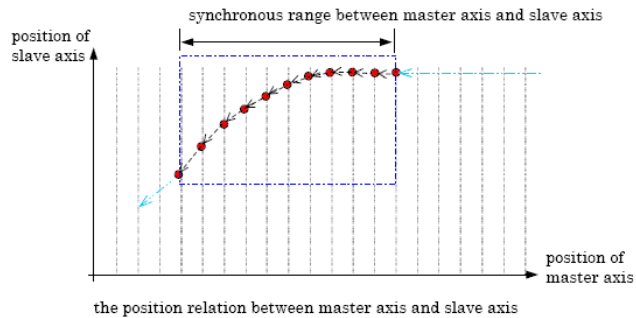

Position Definition Type Synchronous Function

Features

An axis may synchronize the movement with another axis only in the specific range.

This function enables that the slave axis synchronizes the movement with the master axis within the specified range of the master axis according to the data of the position relation between the master axis and the slave axis that had been defined beforehand. This function is executed in the high response mode.

Up to 8 kinds of the position relation data can be registered.

Plural slave axes can be selected for the same position relation data at the same time. But the plural different position relation data can not be selected for plural slave axes at the same time.

Only one master axis can be specified.

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0334-R399 | PM i-A Position Definition Type Synchronous Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

083

Controlled Axis

Pressure and Position Control Function

Overview

The pressure and position control function enables a positional control command and pressure control command to be executed at the same time. The function is an axis control function that automatically selects and exercises position control based on a positional control command when no force is applied to the tool in an axis direction, and automatically selects and exercises pressure control based on a pressure command when an external force is applied to the tool in an axis direction.

For example, the function enables the tool to approach a workpiece in an axis direction by using position control until the tool touches the workpiece. The function can then exercise pressure control with a specified pressure while the tool is touching the workpiece in the axis direction. When the tool is separated from the workpiece, the function can move the tool to a specified position by position control.

With the Power Motion i-A, this function requires high-speed response characteristics, so that the optional function of the HIGH RESPONSE FUNCTION is needed.

Analog Monitor Unit

The 'Analog Monitor Unit' is connected to FSSB line to input an analog current signal to Power Motion i-A in combination with the 'Pressure and Position Control Function'. There are 4 analog current input channels available on the unit. The maximum total number of 'Analog Monitor Units' and 'Separate Detector Interface Units' that can be connected to an FSSB line is 4 for HRV2, and 2 for HRV3.

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------------------------|
| A02B-0323-R460 | 30i-B Pressure and Position Control |
| A02B-0326-R460 | 31i-B5 Pressure and Position Control |
| A02B-0327-R460 | 31i-B Pressure and Position Control |
| A02B-0334-C231 | Analog Monitor Unit (4 Channels) - for Pressure and Position Control |
| A02B-0334-R327 | PM i-A Pressure and Position Control Bell-shaped Command for Pressurization / Depressurization |
| A02B-0334-R400 | PM i-A Pressure and Position Control Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

084

Controlled Axis

Position Control Keep Function

Features

With the Position Control Keep Function, it is possible to prevent the automatic switching from position control to pressure control when using the Pressure and Position Control Function. If a dedicated input signal is activated, the control will not switch the correspondent axis to pressure control mode and stay in position control mode.

Note

The Multi-Axes High-Response Function and the Pressure and Position Control Function are required to use this function.

Benefits

- Prevents unexpected switching to pressure control mode

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0334-R401 | PM i-A Position Control Keep Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

085

Controlled Axis

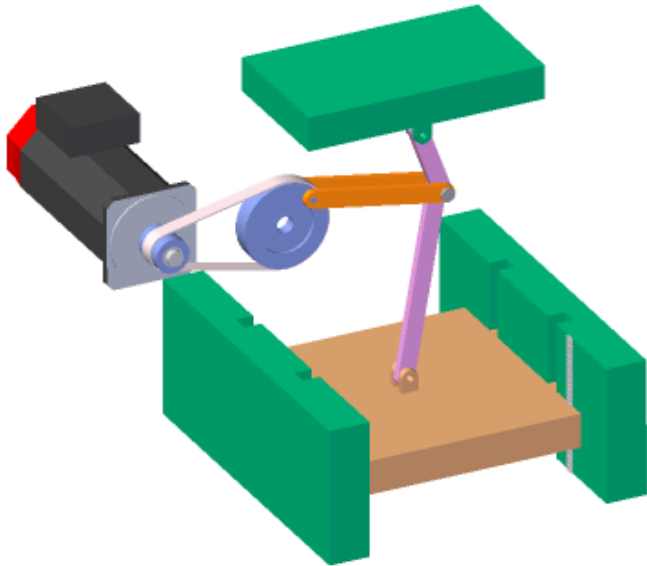

Control Function for Link Type Press

Features

In the rotary link type press mechanism, the deceleration ratio in the slider part changes according to the angle of the main gear. With the Control Function for Link Type Press, the internal value of the position gain is corrected by a gain multiplier according to the angle of the main gear in order to keep the effective position gain constant.

Two different control methods are available. In the rotation control method, the position control is performed based on the feedback of the main gear. In the reverse control method, the position control is performed based on the feedback of the slider.

Benefits

- Support of link type press mechanisms

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0334-S603 | PM i-A Control Function for Link Type Press |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

086

Controlled Axis

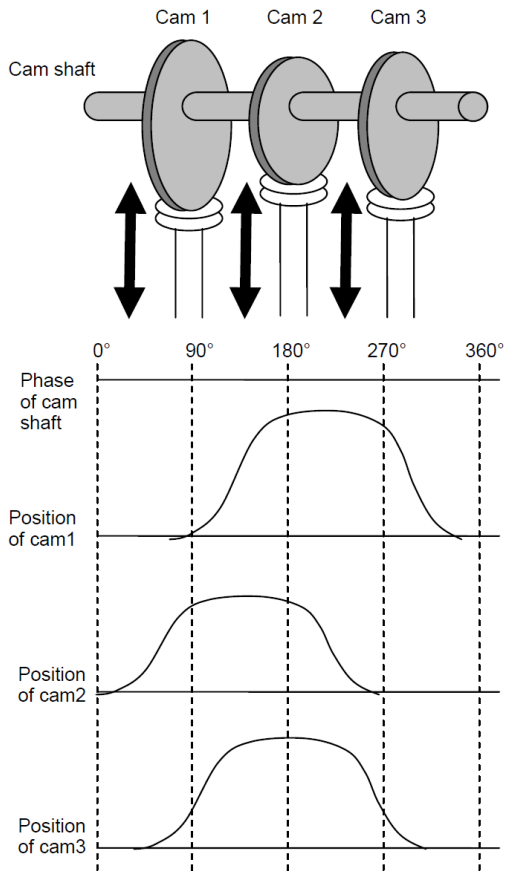

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Electronic Cam Function

Features

The Electronic Cam Function electronically creates a motion of the cam follower that is synchronized with the motion of the cam shaft. The shapes of the cams are registered in the CNC beforehand. The CNC reads the data and moves the cam follower synchronized with the motion of the cam shaft.

Up to 4 cam followers can be synchronized with a cam shaft. Three different kinds of cam shafts are available with this function:

- An externally controlled axis with a rotary pulse coder attached to it.
- A servo axis which is controlled by the CNC.
- A hypothetical axis which is controlled by the CNC.

With this function, it is possible to replace mechanical cam shafts.

Benefits

- Scales down the machine's size and reduces costs
- No wear, no lifetime issues of mechanical components
- No errors due to insufficient mechanical precision

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0334-R402 | PM i-A Electronic Cam Function |

087

Controlled Axis

Increment System C

Features

The Increment System C allows programming to 0.0001mm or 0.00001 inches or 0.0001 degrees.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0323-J805 | 30i-B Increment System C |
| A02B-0326-J805 | 31i-B5 Increment System C |
| A02B-0327-J805 | 31i-B Increment System C |
| A02B-0328-J805 | 32i-B Increment System C |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

088

Controlled Axis

Increment System D

Features

The Increment System D allows programming to 0.00001mm or 0.000001 inches or 0.00001 degrees.

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-S694 | 30i-B Increment System D |
| A02B-0326-S694 | 31i-B5 Increment System D |
| A02B-0327-S694 | 31i-B Increment System D |
| A02B-0328-S694 | 32i-B Increment System D |
| A02B-0334-S694 | PM i-A Increment System D |
| A02B-0353-S694 | 30i-BP Increment System D |
| A02B-0356-S694 | 31i-B5P Increment System D |
| A02B-0357-S694 | 31i-BP Increment System D |
| A02B-0358-S694 | 32i-BP Increment System D |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

089

Controlled Axis

Increment System E

Features

The Increment System E allows programming to 0.000001mm or 0.0000001 inches or 0.000001 degrees.

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-S805 | 30i-B Increment System E |
| A02B-0326-S805 | 31i-B5 Increment System E |
| A02B-0327-S805 | 31i-B Increment System E |
| A02B-0328-S805 | 32i-B Increment System E |
| A02B-0353-S805 | 30i-BP Increment System E |
| A02B-0356-S805 | 31i-B5P Increment System E |
| A02B-0357-S805 | 31i-BP Increment System E |
| A02B-0358-S805 | 32i-BP Increment System E |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

090

Controlled Axis

Arbitrary Command Multiply

Features

The Arbitrary Command Multiply function provides the flexibility to set the gearing between the position feedback device and the motor for a given axis.

When the detection unit assumes a special value, an arbitrary command multiply can be set using a ratio of n:m. The setting range is 1/9999 to 9999/1.

Benefits

- Increase of the flexibility and adaptation of the CNC to the machine structure
- Speeds up CNC and machine design and commissioning

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-S806 | 30i-B Arbitrary Command Multiply |
| A02B-0326-S806 | 31i-B5 Arbitrary Command Multiply |
| A02B-0327-S806 | 31i-B Arbitrary Command Multiply |
| A02B-0328-S806 | 32i-B Arbitrary Command Multiply |
| A02B-0353-S806 | 30i-BP Arbitrary Command Multiply |
| A02B-0356-S806 | 31i-B5P Arbitrary Command Multiply |
| A02B-0357-S806 | 31i-BP Arbitrary Command Multiply |
| A02B-0358-S806 | 32i-BP Arbitrary Command Multiply |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

091

Controlled Axis

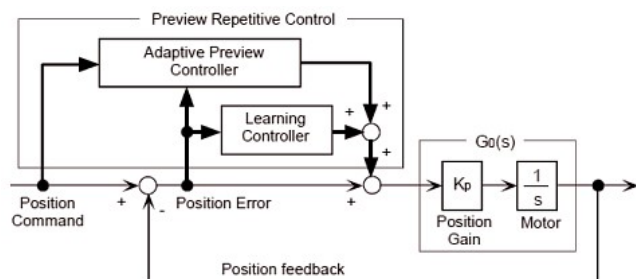

High-Precision Learning Control A

Features

The High-Precision Learning Control A function (formerly Preview Repetitive Control) is a function designed to allow high-speed and high-precision cutting by recovering previously saved cutting data from memory and utilizing that data during production for optimization purpose.

High-Precision Learning Control A, is used to increase the speed and accuracy of machining high volume parts.

Before employing this function in production, the axes involved in the prescribed machining operation must first be “taught” the desired path movements and related cutting data. This data is stored in memory and recovered for use as a template during production.

Compared to High-Precision Learning Control B (formerly Learning Control), this function reduces also the Following Error of the first cycle while using advanced previewing functionality of the control.

This function is ideal for camshaft grinding, crankshaft pin grinding, piston lathes or aspherical lens cutting applications.

Benefits

- Increased speed and accuracy when machining high volume parts
- Higher accuracy than the High-Precision Learning Control B function as it reduces the position error much faster
- Replaces an expensive mechanical cam with an electronic template that causes the axes to follow a virtual cam

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------|
| A02B-0323-J706 | 30i-B High-Precision Learning Control A - Incl. Spindle Learning Control |
| A02B-0326-J706 | 31i-B5 High-Precision Learning Control A - Incl. Spindle Learning Control |
| A02B-0327-J706 | 31i-B High-Precision Learning Control A - Incl. Spindle Learning Control |
| A02B-0353-J706 | 30i-BP High Precision Learning Control A |
| A02B-0356-J706 | 31i-B5P High Precision Learning Control A |
| A02B-0357-J706 | 31i-BP High Precision Learning Control A |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

092

Controlled Axis

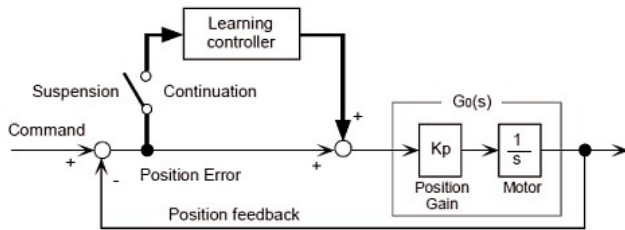

High-Precision Learning Control B

Features

The High-Precision Learning Control B function (formerly Learning Control) is a function designed to allow high-speed and high-precision cutting by recovering previously saved cutting data from memory and utilizing that data during production. The CNC works to eliminate the position error in the live cutting path versus the memorized data.

Before employing this function in production, the axes involved in the prescribed machining operation must first be “taught” the desired path movements and related cutting data. These are then stored in memory and recovered for use as a template during production.

Compared to the High-Precision Learning Function A, the High-Precision Learning Function B does not feature the Advanced Preview Control

This function is ideal for camshaft grinding, crankshaft pin grinding, piston lathes or aspherical lens cutting applications.

Benefits

- Learning Control is used to increase the speed and accuracy of machining high volume parts.
- Replace an expensive mechanical cam with an electronic template that causes the axes to follow a virtual cam.

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------|
| A02B-0323-J705 | 30i-B High-Precision Learning Control B - Incl. Spindle Learning Control |
| A02B-0326-J705 | 31i-B5 High-Precision Learning Control B - Incl. Spindle Learning Control |
| A02B-0327-J705 | 31i-B High-Precision Learning Control B - Incl. Spindle Learning Control |
| A02B-0353-J705 | 30i-BP High Precision Learning Control B |
| A02B-0356-J705 | 31i-B5P High Precision Learning Control B |
| A02B-0357-J705 | 31i-BP High Precision Learning Control B |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

093

Controlled Axis

High-Precision Learning Control C

Features

The High-Precision Learning Control C function (formerly Compact Learning Control) is a subset function of the High-Precision Learning Control B. It can be implemented on standard servo axis cards instead of the servo axes card with large memory (L24 servo cards).

This function provides an angle-base learning control for compact application without handling learning data.

The High-Precision Learning Control C function can be used for applications such as gear grinding, gear cutting and shaping as well as to control grinder oscillation.

Benefits

- Learning Control increases the speed and accuracy of the machining when producing parts in high volume.

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-R692 | 30i-B High-Precision Learning Control C |
| A02B-0326-R692 | 31i-B5 High-Precision Learning Control C |
| A02B-0327-R692 | 31i-B High-Precision Learning Control C |
| A02B-0353-R692 | 30i-BP High Precision Learning Control C |
| A02B-0356-R692 | 31i-B5P High Precision Learning Control C |
| A02B-0357-R692 | 31i-BP High Precision Learning Control C |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

094

Controlled Axis

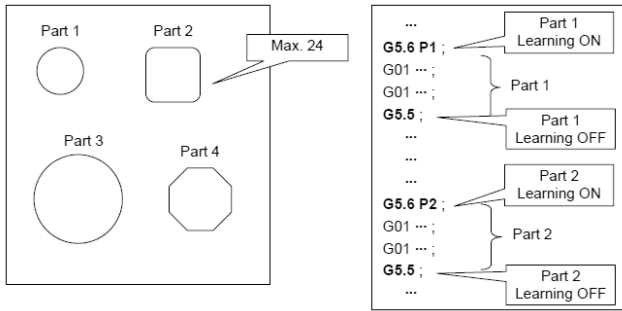

Learning Control for Parts Cutting A

Features

The Learning Control for Parts Cutting A function (formerly Learning Control for Parts Cutting) can achieve high precision machining when producing many items with an identical profile.

While machining such an item, there may be multiple identical operations that may be applied to each work-piece in succession. Each repeated path element (such as a drilling sequence or a pocketing sequence) may be treated as a path element to which Learning Control for Parts Cutting may be applied.

Benefits

- Allows the programmer to apply high-precision cutting to specified path elements within the part program.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-R510 | 30i-B Learning Control for Parts Cutting A |
| A02B-0326-R510 | 31i-B5 Learning Control for Parts Cutting A |
| A02B-0327-R510 | 31i-B Learning Control for Parts Cutting A |
| A02B-0328-R510 | 32i-B Learning Control for Parts Cutting A |
| A02B-0353-R510 | 30i-BP Learning Control for Parts Cutting A |
| A02B-0356-R510 | 31i-B5P Learning Control for Parts Cutting A |
| A02B-0357-R510 | 31i-BP Learning Control for Parts Cutting A |
| A02B-0358-R510 | 32i-BP Learning Control for Parts Cutting A |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

095

Controlled Axis

Learning Control for Parts Cutting B

Features

The Learning Control for Parts Cutting B function (formerly Learning Control for Rigid Tapping) provides a superior controllability in repetitive command for rigid-tapping operation.

It features capabilities to realize high-speed and high-precision machining sequences by minimizing the synchronous error between spindle and tap feed axis during Rigid Tapping.



Benefits

- Synchronous error between the spindle axis and the z-axis learned at the z-axis to minimize synchronous error, which enables the z-axis to follow the spindle axis completely, and produces higher precision in machining
- Does not require any special format programs. The only commands that have to be added to the rigid tapping program are Learning On (G5.6 P_ Q1) and Learning Off (G5.5 Q1)
- Uses standard servo cards for up to 24 types of tapping in a total of 16 seconds
- Maintains high precision while improving machining speed or reducing acceleration and deceleration time constant
- Most effective control to improve rigid tap precision and reduce cycle time

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-R539 | 30i-B Learning Control for Parts Cutting B (Needs Rigid Tapping) |
| A02B-0326-R539 | 31i-B5 Learning Control for Parts Cutting B (Needs Rigid Tapping) |
| A02B-0327-R539 | 31i-B Learning Control for Parts Cutting B (Needs Rigid Tapping) |
| A02B-0328-R539 | 32i-B Learning Control for Parts Cutting B (Needs Rigid Tapping) |
| A02B-0353-R539 | 30i-BP Learning Control for Parts Cutting B |
| A02B-0356-R539 | 31i-B5P Learning Control for Parts Cutting B |
| A02B-0357-R539 | 31i-BP Learning Control for Parts Cutting B |
| A02B-0358-R539 | 32i-BP Learning Control for Parts Cutting B |

Learning Control for Rigid Tapping

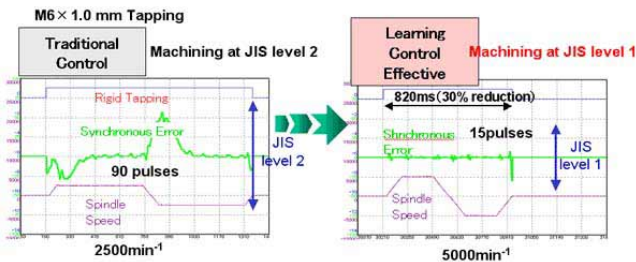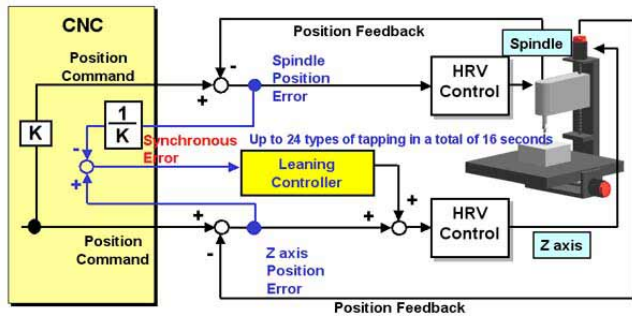

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

096

Controlled Axis

Spindle Learning Control

Features

The Spindle Learning Control function is used to increase the speed and accuracy of machining high volume parts.

This function works like the servo-based Learning Control, except that the spindle control loop applies to the compensation mechanism instead of the servo control loop.

Notes

- A special software is required in the spindle amplifier
- The Cs Contouring Control function is required in the CNC

Benefits

- Increase the speed and accuracy of machining high volume parts

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-S635 | 30i-B Spindle Learning Control |
| A02B-0326-S635 | 31i-B5 Spindle Learning Control |
| A02B-0327-S635 | 31i-B Spindle Learning Control |
| A02B-0353-S635 | 30i-BP Spindle Learning Control |
| A02B-0356-S635 | 31i-B5P Spindle Learning Control |
| A02B-0357-S635 | 31i-BP Spindle Learning Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

097

Controlled Axis

Spindle Learning Control in High-Precision Learning Control A/B

Features

The Spindle Learning Control in High-Precision Learning Control function is used to increase the speed and accuracy of machining high volume parts.

This function works like the servo-based Learning Control, except that the spindle control loop applies to the compensation mechanism instead of the servo control loop.

This function is applicable if Spindle Learning Control is used together with High-Precision Learning Control A or B.

Notes

- A special software is required in the spindle amplifier
- The Cs Contouring Control function is required in the CNC
- This option is available for FS30i-B/31i-B5/31i-B

Benefits

- Increase the speed and accuracy of machining high volume parts

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------|
| A02B-0323-J386 | 30i-B Spindle Learning Control in High Precision Learning Control A or B |
| A02B-0353-J386 | 30i-BP Spindle Learning Control in High Precision Learning Control A or B |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

098

Controlled Axis

Learning Control - Memory Expansion

Features

When using the High-Precision Learning Control function on the CNC, this function expands the maximum number of available profiles and learning steps.

| | Max. number of profiles | Max. number of learning steps |
|--------------------|-------------------------|-------------------------------|
| Standard | 5 | 2 |
| With this function | 24 | 5 |

Benefits

- Increased Learning Memory for complex profiles or where a long learning period is required

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-J976 | 30i-B Memory Expansion for Learning Control |
| A02B-0326-J976 | 31i-B5 Memory Expansion for Learning Control |
| A02B-0327-J976 | 31i-B Memory Expansion for Learning Control |
| A02B-0353-J976 | 30i-BP Learning Memory Expanded Function |
| A02B-0356-J976 | 31i-B5P Learning Memory Expanded Function |
| A02B-0357-J976 | 31i-BP Learning Memory Expanded Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

099

Controlled Axis

Learning Memory Size 10Mbyte

Features

The standard learning memory for the High-Precision Learning Control of the Series 30i-31i-MODEL B and the Learning Control for Parts Cutting of the Series 30i/31i/32i-MODEL B can be expanded from 5 Mbyte to 10Mbyte.

Benefits

- Expansion of the learning time or the combination learning time vs. number of learning axes

Ordering Information


| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-R720 | 30i-B Learning Memory Size 10 MB |
| A02B-0326-R720 | 31i-B5 Learning Memory Size 10 MB |
| A02B-0327-R720 | 31i-B Learning Memory Size 10 MB |
| A02B-0328-R720 | 32i-B Learning Memory Size 10 MB |
| A02B-0353-R720 | 30i-BP Learning Memory Size - 10 MB |
| A02B-0356-R720 | 31i-B5P Learning Memory Size - 10 MB |
| A02B-0357-R720 | 31i-BP Learning Memory Size - 10 MB |
| A02B-0358-R720 | 32i-BP Learning Memory Size - 10 MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

100 Controlled Axis

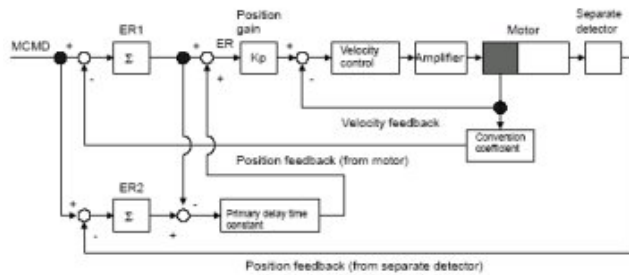

Dual Position Feedback

Features

In general, a machine with a large load inertia ratio or with a large backlash may operate stably with a semi-closed loop (motor feedback only) but may vibrate with a closed loop (separate encoder feedback).

The Dual Position Feedback function improves the control in such a way that a machine can operate stably with a closed loop as it would in the case of a semi-closed loop.

Benefits

- Increase machine stability and precision

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-J704 | 30i-B Dual Position Feedback |
| A02B-0326-J704 | 31i-B5 Dual Position Feedback |
| A02B-0327-J704 | 31i-B Dual Position Feedback |
| A02B-0328-J704 | 32i-B Dual Position Feedback |
| A02B-0333-J704 | 35i-B Dual Position Feedback |
| A02B-0334-J704 | PM i-A Dual Position Feedback |
| A02B-0339-J704 | 0i-TF Dual Position Feedback |
| A02B-0340-J704 | 0i-MF Dual Position Feedback |
| A02B-0349-J704 | 0i-TFP Dual Position Feedback |
| A02B-0350-J704 | 0i-MFP Dual Position Feedback |
| A02B-0353-J704 | 30i-BP Dual Position Feedback |
| A02B-0356-J704 | 31i-B5P Dual Position Feedback |
| A02B-0357-J704 | 31i-BP Dual Position Feedback |
| A02B-0358-J704 | 32i-BP Dual Position Feedback |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

101

Controlled Axis

Position Feedback Dynamic Switching Function

Features

The Position Feedback Dynamic Switching function used when a single rotary table with turning capability (hereafter called a rotary table) is controlled by two different operations such as one turning operation and one milling operation.

In case of a turning operation, the rotary table is turned by a spindle motor and a separate position detector.

In case of a milling operation, the rotary table is rotated by a servo motor and a built-in pulse coder.

This function enables the management of the coordinate of the rotary axis even if the position detector is switched. According to the state of control, the position feedback of the rotary axis is dynamically switched between the separate position detector attached with a rotary table and the built-in pulse coder of servo motor using PMC signals.

Benefits

- Flexible configuration of machines
- Simpler control of advanced mill-turn machine architectures

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-S747 | 30i-B Position Feedback Dynamic Switching |
| A02B-0326-S747 | 31i-B5 Position Feedback Dynamic Switching |
| A02B-0327-S747 | 31i-B Position Feedback Dynamic Switching |
| A02B-0328-S747 | 32i-B Position Feedback Dynamic Switching |
| A02B-0334-S747 | PM i-A Position Feedback Dynamic Switching |
| A02B-0353-S747 | 30i-BP Position Feedback Dynamic Switching |
| A02B-0356-S747 | 31i-B5P Position Feedback Dynamic Switching |
| A02B-0357-S747 | 31i-BP Position Feedback Dynamic Switching |
| A02B-0358-S747 | 32i-BP Position Feedback Dynamic Switching |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

102

Controlled Axis

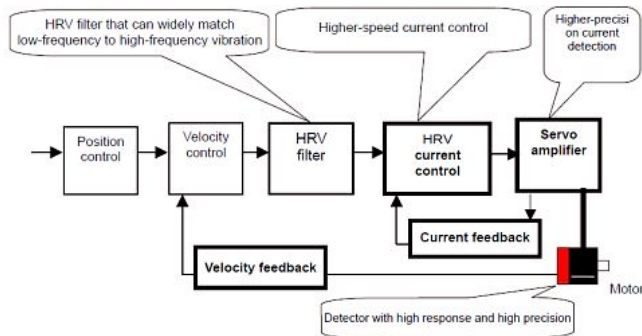

HRV3 Control

Features

SERVO HRV control is a digital servo current control methods. When using this method of control, higher speed, higher precision and higher acceleration can be achieved.

There are three types of SERVO HRV control available:

- SERVO HRV2 control
- SERVO HRV3 control
- SERVO HRV4 control

SERVO HRV control has three main features.

1. A disturbance elimination filter which eliminates the low-frequency vibration of a machine with low rigidity
2. Achievement of smooth feed with a high-precision servo amplifiers and detectors
3. The use of high-speed Digital Signal Processor (DSP) which allow a current control period much shorter than the conventional period achieved with standard systems (high-speed HRV current control)

SERVO HRV2 features a current loop of 125 μ s and is standard on the Series 30i-B CNC.

SERVO HRV3 features a current loop of 62.5 μ s and is particularly designed for demanding machining applications. It is standard on the Series 0i-F and 0i-F Plus CNC.

SERVO HRV4 features a current loop of 31.25 μ s and has been designed for specific applications. It also features a faster position loop compared to the HRV2 and HRV3 functions.

Benefits

- Very performant and scalable axis control

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-J398 | 30i-B High-Speed HRV3 Function |
| A02B-0326-J398 | 31i-B5 High-Speed HRV3 Function |
| A02B-0327-J398 | 31i-B High-Speed HRV3 Function |
| A02B-0328-J398 | 32i-B High-Speed HRV3 Function |
| A02B-0333-J398 | 35i-B High-Speed HRV3 Function |
| A02B-0334-J398 | PM i-A High-Speed HRV3 Function |
| A02B-0353-J398 | 30i-BP High-Speed HRV3 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

103

| Specification | Description |
|----------------|----------------------------------|
| A02B-0356-J398 | 31i-B5P High-Speed HRV3 Function |
| A02B-0357-J398 | 31i-BP High-Speed HRV3 Function |
| A02B-0358-J398 | 32i-BP High-Speed HRV3 Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

104

Controlled Axis

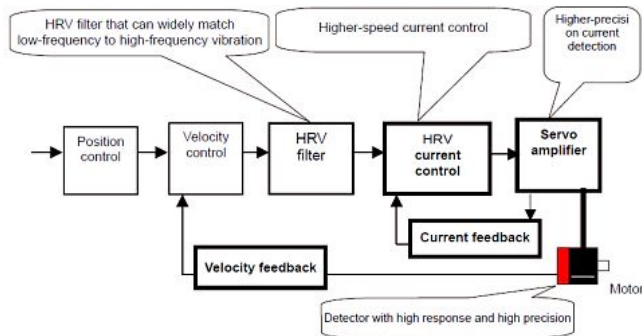

HRV4 Control

Features

SERVO HRV control is a digital servo current control methods. When using this method of control, higher speed, higher precision and higher acceleration can be achieved.

There are three types of SERVO HRV control available:

- SERVO HRV2 control
- SERVO HRV3 control
- SERVO HRV4 control

SERVO HRV control has three main features.

1. A disturbance elimination filter which eliminates the low-frequency vibration of a machine with low rigidity
2. Achievement of smooth feed with a high-precision servo amplifiers and detectors
3. The use of high-speed Digital Signal Processor (DSP) which allow a current control period much shorter than the conventional period achieved with standard systems (high-speed HRV current control)

SERVO HRV2 features a current loop of 125 μ s and is standard on the Series 30i-B CNC.

SERVO HRV3 features a current loop of 62.5 μ s and is particularly designed for demanding machining applications. It is standard on the Series 0i-F CNC.

SERVO HRV4 features a current loop of 31.25 μ s and has been designed for specific applications. It also features a faster position loop compared to the HRV2 and HRV3 functions.

Benefits

- Very performant and scalable axis control

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J399 | 30i-B High-Speed HRV4 Function |
| A02B-0326-J399 | 31i-B5 High-Speed HRV4 Function |
| A02B-0327-J399 | 31i-B High-Speed HRV4 Function |
| A02B-0353-J399 | 30i-BP High-Speed HRV4 Function |
| A02B-0356-J399 | 31i-B5P High-Speed HRV4 Function |
| A02B-0357-J399 | 31i-BP High-Speed HRV4 Function |
| A02B-0358-J399 | 32i-BP High-Speed HRV4 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

105

Controlled Axis

Inch/Metric Conversion

Features

The Inch / Metric Conversion function provides the possibility to switch units between the metric and the inch system within a program directly using a G code.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Very flexible programming

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-J876 | 30i-B Inch/Metric Conversion |
| A02B-0326-J876 | 31i-B5 Inch/Metric Conversion |
| A02B-0327-J876 | 31i-B Inch/Metric Conversion |
| A02B-0328-J876 | 32i-B Inch/Metric Conversion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

106

Controlled Axis

Stored Stroke Check 1 Area Expansion

Features

With the Stored Stroke Check function included in the Basic Function of the CNC, it is possible to switch the 2 checking areas with Digital Input signals.

The Stored Stroke Check 1 Area Expansion function expands the checking areas from 2 to 8.

It is easy to change the stored stroke check area in case of changes of the machine moving area such as during tool changing or tool measuring.

Benefits

- Increase of the machine flexibility

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-R552 | 30i-B Stored Stroke Check, 1 Area Expansion |
| A02B-0326-R552 | 31i-B5 Stored Stroke Check, 1 Area Expansion |
| A02B-0327-R552 | 31i-B Stored Stroke Check, 1 Area Expansion |
| A02B-0328-R552 | 32i-B Stored Stroke Check, 1 Area Expansion |
| A02B-0339-R552 | 0i-TF Stored Stroke Check 1 Area Expansion |
| A02B-0340-R552 | 0i-MF Stored Stroke Check 1 Area Expansion |
| A02B-0349-R552 | 0i-TFP Stored Stroke Check 1 Area Expansion |
| A02B-0350-R552 | 0i-MFP Stored Stroke Check 1 Area Expansion |
| A02B-0353-R552 | 30i-BP Stored Stroke Check 1 Area Expansion |
| A02B-0356-R552 | 31i-B5P Stored Stroke Check 1 Area Expansion |
| A02B-0357-R552 | 31i-BP Stored Stroke Check 1 Area Expansion |
| A02B-0358-R552 | 32i-BP Stored Stroke Check 1 Area Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

107

Controlled Axis

Stroke Limit External Setting

Features

The Stroke Limit External Setting function allows the operator to set the desired stroke limit by moving the machine to a desired limit and use a push button to store values in stroke limit parameters.

When a new tool is mounted, the operator positions the tip of the tool on the two corners of the limit area and specifies the machine coordinates of the corners in the parameters for stroke limit 1. The machine coordinates are stored in the CNC as the limit positions.

The operator can then activate the input signals for setting the stroke limit. Stroke limit setting signals are provided for each axis and each direction.

Checking of the stroke limit can also be selected by turning on or off the limit release signal common to all axes.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplifies machining zone setting

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-J845 | 30i-B Stroke Limit External Setting |
| A02B-0326-J845 | 31i-B5 Stroke Limit External Setting |
| A02B-0327-J845 | 31i-B Stroke Limit External Setting |
| A02B-0328-J845 | 32i-B Stroke Limit External Setting |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

108

Controlled Axis

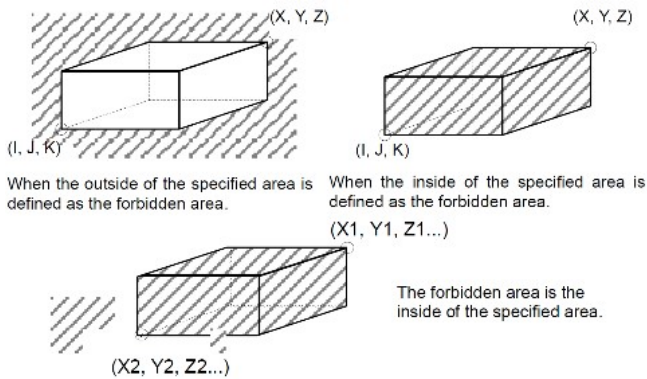

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Stored Stroke Check 2,3

Features

The Stored Stroke Check 2 function allows the outside or inside of an area specified by parameters or a program to be defined as the forbidden area.

The operator specifies as a limit position a distance from the origin of the machine coordinate system. This function is enabled after manual reference position return is performed at power-on.

When the limits are specified in a program, they can be set for the X-, Y-, and Z-axes. For this reason, the forbidden area can be changed according to the workpiece. Whether to define the inside or outside of the specified area as the forbidden area is determined by setting the corresponding parameter.

Stored Stroke Check 3 defines the inside of a parameter- set area as a forbidden area.

When the Stored Stroke Check 2 or 3 functions and the Chuck/Tail Stock Barrier function are used at the same time, the Chuck/Tail Stock Barrier option is valid and the Stored Stroke Check 2 or 3 is ignored.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits


- Possibility to implement safe machining zones in a machine
- Protects equipment against collisions

Ordering Information


| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J840 | 30i-B Stored Stroke Check 2 and 3 |
| A02B-0326-J840 | 31i-B5 Stored Stroke Check 2 and 3 |
| A02B-0327-J840 | 31i-B Stored Stroke Check 2 and 3 |
| A02B-0328-J840 | 32i-B Stored Stroke Check 2 and 3 |
| A02B-0333-J840 | 35i-B Stored Stroke Check 2 and 3 |

109

Controlled Axis

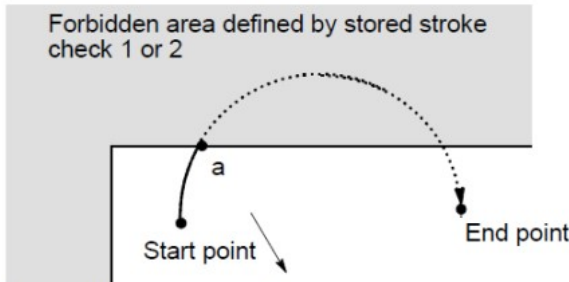

The tool is stopped at point a according to stored stroke check 1 or 2.

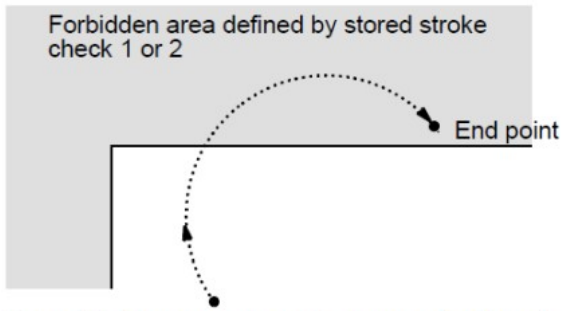

Immediately upon movement commencing from the start point, the tool is stopped to enable a stroke limit check before moving to be performed before movement.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Stored Limit Check Before Move

Features

The Stored Limit Check before Move function calculates the movement end point at the start of movement in a block, during automatic operation, based on the current machine position and the specified amount of travel, to check whether the end point falls within the prohibited area for stored stroke limit 1, 2, or 3.

If the end point falls within a prohibited area, the movement for that block is stopped immediately upon the start of movement and an alarm is issued.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus (all Types except 0i-TF (Plus) Type 5).

Benefits

- Avoid axis displacement if a movement is supposed to reach a prohibited machining zone

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-J749 | 30i-B Stroke Limit Check before Move |
| A02B-0326-J749 | 31i-B5 Stroke Limit Check before Move |
| A02B-0327-J749 | 31i-B Stroke Limit Check before Move |
| A02B-0328-J749 | 32i-B Stroke Limit Check before Move |
| A02B-0334-J749 | PM i-A Stroke Limit Check before Move |
| A02B-0349-J749 | 0i-TFP Stroke Limit Check before Move |

110

Controlled Axis

Stroke Limit Area Changing Function

Features

The Stroke Limit Area Changing function enables parameters setting that set the side boundary of the stroke limit during axis movement.

The setting of the parameters is available through the PMC window function (WINDW: SUB52), FOCAS2, and C language executor. The new forbidden area is enabled as soon as the writing parameters is completed.

Note

The Stroke Limit Area Changing function is disabled when automatic slave axis parameter setting on feed axis synchronization is enabled. In this case, the parameters can only be written when all axes are stopped.

Benefits

- The setting of the stroke limit can be customized, for instance through a specific HMI

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R585 | 30i-B Stroke Limit Area Changing Function |
| A02B-0326-R585 | 31i-B5 Stroke Limit Area Changing Function |
| A02B-0327-R585 | 31i-B Stroke Limit Area Changing Function |
| A02B-0328-R585 | 32i-B Stroke Limit Area Changing Function |
| A02B-0333-R585 | 35i-B Stroke Limit Area Changing Function |
| A02B-0339-R585 | 0i-TF Stroke Limit Area Changing Function |
| A02B-0340-R585 | 0i-MF Stroke Limit Area Changing Function |
| A02B-0349-R585 | 0i-TFP Stroke Limit Area Changing Function |
| A02B-0350-R585 | 0i-MFP Stroke Limit Area Changing Function |
| A02B-0353-R585 | 30i-BP Stroke Limit Area Changing Function |
| A02B-0356-R585 | 31i-B5P Stroke Limit Area Changing Function |
| A02B-0357-R585 | 31i-BP Stroke Limit Area Changing Function |
| A02B-0358-R585 | 32i-BP Stroke Limit Area Changing Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

111

Controlled Axis

| NO. | ADDRESS | DATA | NO. | ADDRESS | DATA | NO. | ADDRESS | DATA |
|-----|---------|----------|-----|---------|------|-----|---------|------|
| 0 | D1100 | 2100000 | 12 | D1148 | 0 | 24 | D1196 | 0 |
| 1 | D1104 | 2200000 | 13 | D1152 | 0 | 25 | D1200 | 0 |
| 2 | D1108 | -2100000 | 14 | D1156 | 0 | 26 | D1204 | 0 |
| 3 | D1112 | -2200000 | 15 | D1160 | 0 | 27 | D1208 | 0 |
| 4 | D1116 | 3100000 | 16 | D1164 | 0 | 28 | D1212 | 0 |
| 5 | D1120 | 3200000 | 17 | D1168 | 0 | 29 | D1216 | 0 |
| 6 | D1124 | -3100000 | 18 | D1172 | 0 | 30 | D1220 | 0 |
| 7 | D1128 | -3200000 | 19 | D1176 | 0 | 31 | D1224 | 0 |
| 8 | D1132 | 0 | 20 | D1180 | 0 | 32 | D1228 | 0 |
| 9 | D1136 | 0 | 21 | D1184 | 0 | 33 | D1232 | 0 |
| 10 | D1140 | 0 | 22 | D1188 | 0 | 34 | D1236 | 0 |
| 11 | D1144 | 0 | 23 | D1192 | 0 | 35 | D1240 | 0 |

Stored Stroke Limit Range Switching Function by Signal

Features

With this function, the Range Stored Stroke Limit can be switched by an input signal of the PMC. It is then possible to set the limit easily.

The ranges are stored in data tables in the PMC and signals can be used for switching on and off the limits.

Benefits

- Simplified management of multiple zones directly from the PMC
- Protection of the machine and asset against destructive movements
- Overall improvement of the machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------|
| A02B-0323-R849 | 30i-B Stored Stroke Limit Range Switching Function by Signal |
| A02B-0326-R849 | 31i-B5 Stored Stroke Limit Range Switching Function by Signal |
| A02B-0327-R849 | 31i-B Stored Stroke Limit Range Switching Function by Signal |
| A02B-0328-R849 | 32i-B Stored Stroke Limit Range Switching Function by Signal |
| A02B-0339-R849 | 0i-TF Stored Stroke Limit Range Switch Function by Signal |
| A02B-0340-R849 | 0i-MF Stored Stroke Limit Range Switch Function by Signal |
| A02B-0349-R849 | 0i-TFP Stored Stroke Limit Range Switching Function by Signal |
| A02B-0350-R849 | 0i-MFP Stored Stroke Limit Range Switching Function by Signal |
| A02B-0353-R849 | 30i-BP Stored Stroke Limit Range Switching Function by Signal |
| A02B-0356-R849 | 31i-B5P Stored Stroke Limit Range Switching Function by Signal |
| A02B-0357-R849 | 31i-BP Stored Stroke Limit Range Switching Function by Signal |
| A02B-0358-R849 | 32i-BP Stored Stroke Limit Range Switching Function by Signal |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

112

Controlled Axis

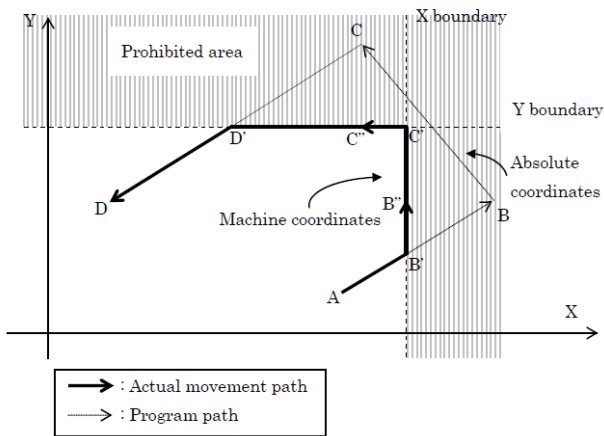

OT Area Access Avoidance Function

Features

If a rapid traverse command (G00) in automatic operation would cause the machine to enter the prohibited area of Stored Stroke Check 1, the respective axis is stopped before and set in machine lock state. No overtravel alarm is generated. Automatic operation continues after that, and the absolute and relative coordinates are updated during machine lock. When the coordinates leave the prohibited area, machine lock state is released.

OT Area Access Avoidance allows you to use programs on multiple machines with different stroke sizes without modification.

Benefits

- Use programs on multiple machines

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-R169 | 30i-B OT Area Access Avoidance Function |
| A02B-0326-R169 | 31i-B5 OT Area Access Avoidance Function |
| A02B-0327-R169 | 31i-B OT Area Access Avoidance Function |
| A02B-0328-R169 | 32i-B OT Area Access Avoidance Function |
| A02B-0340-R169 | 0i-MF OT Area Access Avoidance Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

113

Controlled Axis

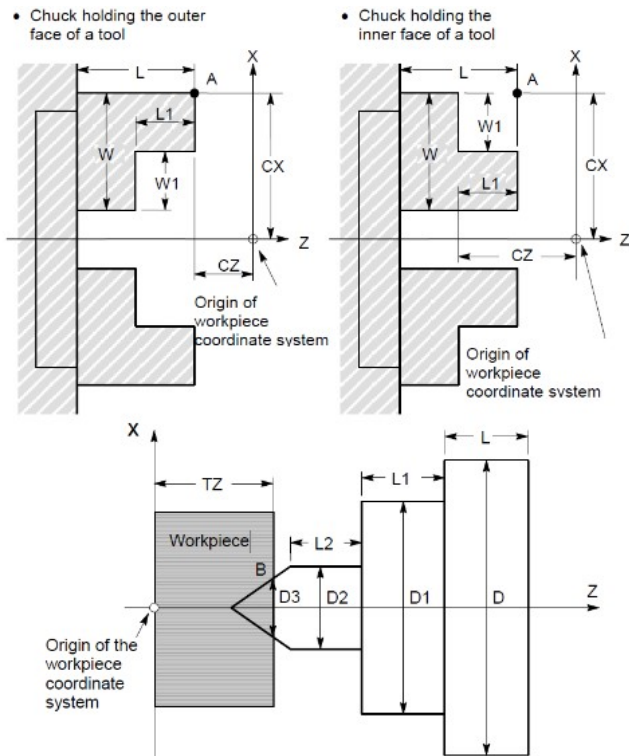

Chuck and Tail Stock Barrier

Features

The Chuck and Tail Stock Barrier function prevents damages to the machine by checking whether the tool tip interferes with either the chuck or tail stock.

This is realized when specifying an area into which the tool may not enter (entry-prohibition area). This is done using a special setting screen, according to the shapes of the chuck and tail stock.

If the tool tip would enter the set area during a machining operation, this function stops the tool and outputs an alarm message. The tool can be removed from the prohibited area only by retracting it in the direction from which the tool entered the area.

Note: when Stored Stroke Check 2 or 3 option and Chuck / Tail Stock Barrier option are used at the same time, the Chuck / Tail Stock Barrier option is valid and Stored Stroke Check 2 or 3 is ignored.

This function is a basic function in FANUC Series 0i-TF (Type 1, Type 3) and 0i-TF Plus (Type 0, 1 and 3).

Benefits

- Protection of the machine work space
- Protection against programming errors

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-J720 | 30i-B Chuck and Tail Stock Barrier |
| A02B-0326-J720 | 31i-B5 Chuck and Tail Stock Barrier |
| A02B-0327-J720 | 31i-B Chuck and Tail Stock Barrier |
| A02B-0328-J720 | 32i-B Chuck and Tail Stock Barrier |
| A02B-0349-J720 | 0i-TFP Chuck and Tail Stock Barrier |
| A02B-0353-J720 | 30i-BP Chuck and Tail Stock Barrier |
| A02B-0356-J720 | 31i-B5P Chuck and Tail Stock Barrier |
| A02B-0357-J720 | 31i-BP Chuck and Tail Stock Barrier |
| A02B-0358-J720 | 32i-BP Chuck and Tail Stock Barrier |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

114

Controlled Axis

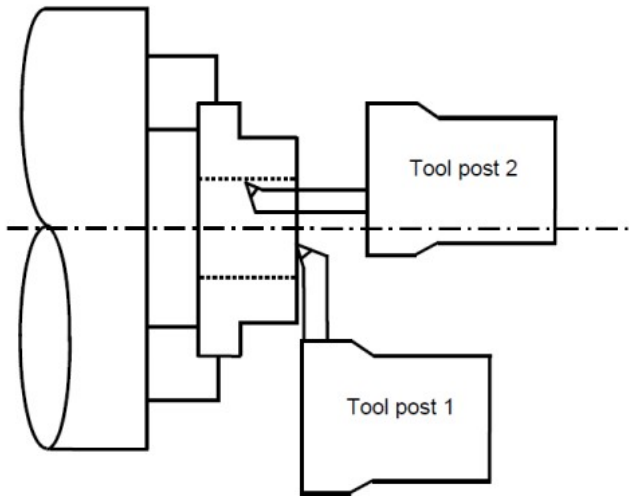

Interference Check for Each Path

Features

The Interference Check function checks the tool posts of multiple paths for collision possibilities.

When tool posts on individual paths machine the same workpiece simultaneously, the tool posts can approach each other very closely. If the tool posts interfere with each other due to a program error or any other setting error, serious damage such as tool or machine destruction can occur.

If a command that could cause that the tool posts of paths to interfere with each other is specified, the function gradually stops the tool posts before the tool posts actually interfere with each other.

The contours and shapes of the tool posts on individual paths are checked to determine whether or not interference occurs. A tool post is modeled by the combination of 2 rectangular areas.

This function enables an interference check between two paths or interference check among multiple paths. The number of paths to check can be determined by parameter setting.

Benefits

- Protection of the machine
- Ease the programming of multi-path systems
- Reduction of the downtime

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-J839 | 30i-B Interference Check for Each Path |
| A02B-0326-J839 | 31i-B5 Interference Check for Each Path |
| A02B-0327-J839 | 31i-B Interference Check for Each Path |
| A02B-0328-J839 | 32i-B Interference Check for Each Path |
| A02B-0339-J839 | 0i-TF Interference Check Each Path |
| A02B-0349-J839 | 0i-TFP Interference Check for Each Path |
| A02B-0353-J839 | 30i-BP Interference Check for each Path |
| A02B-0356-J839 | 31i-B5P Interference Check for each Path |
| A02B-0357-J839 | 31i-BP Interference Check for each Path |
| A02B-0358-J839 | 32i-BP Interference Check for each Path |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

115

Controlled Axis

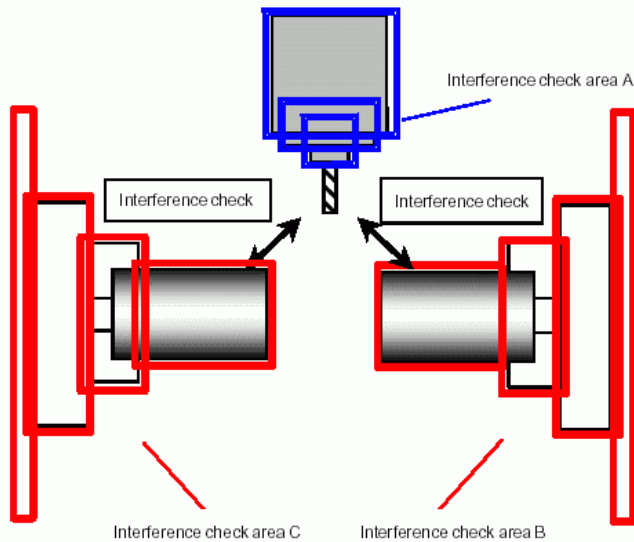

Interference Check for Rotary Area

Features

This function checks for interference among the tool post and chucks and stops the machine safely. Three major interference check areas can be set, each of which is specified by using rectangles. Two of the three interference check areas can be moved and rotated.

The following interference check areas can be set:

- Interference check area A and interference check area B with up to 4 rectangles. The entire area moves according to the movement along parameter-set two axes. In addition, the entire area can be rotated according to the rotation on a parameter-set axis.
- Interference check area C with up to 4 rectangles. The area cannot be moved and rotated.

Benefits

- Protection of the machine
- Reduction of the downtime

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-S643 | 30i-B Interference Check for Rotary Area |
| A02B-0326-S643 | 31i-B5 Interference Check for Rotary Area |
| A02B-0327-S643 | 31i-B Interference Check for Rotary Area |
| A02B-0328-S643 | 32i-B Interference Check for Rotary Area |
| A02B-0329-S643 | 30i-LB Interference Check for Rotary Area |
| A02B-0330-S643 | 31i-LB Interference Check for Rotary Area |
| A02B-0353-S643 | 30i-BP Interference Check for Rotary Area |
| A02B-0356-S643 | 31i-B5P Interference Check for Rotary Area |
| A02B-0357-S643 | 31i-BP Interference Check for Rotary Area |
| A02B-0358-S643 | 32i-BP Interference Check for Rotary Area |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

116

Controlled Axis

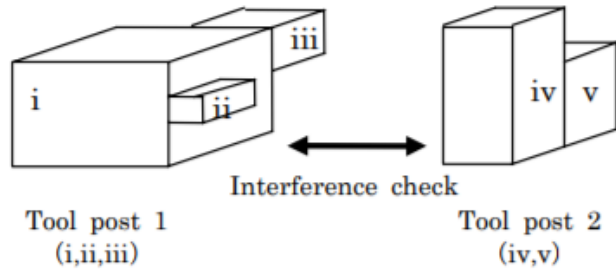

Interference Check Function for Automatic Lathe

Features

Especially automatic lathes are often equipped with multiple tool posts. The tool posts can move independently and may interfere with each other. If a collision happens due to a programming error, serious damage of the tool or the machine can occur.

The Interference Check Function for Automatic Lathe detects and avoids possible collisions between two tool posts. If the functions detects a possible collision, the axes are decelerated and stopped before the collision happens.

Up to three tool posts can be defined. Tool posts are modeled by a combination of max. 10 rectangular parallelepipeds.

Benefits

- Protection of the machine

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------|
| A02B-0323-R501 | 30i-B Interference Check Function for Automatic Lathe |
| A02B-0327-R501 | 31i-B Interference Check Function for Automatic Lathe |
| A02B-0328-R501 | 32i-B Interference Check Function for Automatic Lathe |
| A02B-0353-R501 | 30i-BP Interference Check Function for Automatic Lathe |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

117

Controlled Axis

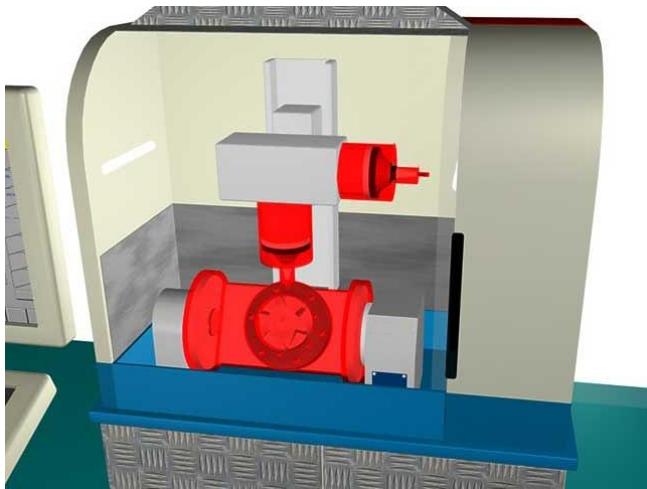


Built-In 3D Interference Check

Features

The 3D Interference Check function is an advanced anti collision function. The function is implemented directly into the CNC and has extremely rapid interference check in real time. The success in avoiding collisions is almost 100% - even when setting up or in manual mode. This function is available for both milling and turning machines and is particularly recommended for 5 axes machines or complex machines.

The critical working area of a machine can be emulated using geometric elements (planes, rectangular parallelepipeds and cylinders) that are defined using absolute dimensional data (to the micron) and work in conjunction with the programmed tool data taken from the normal CNC memory. The CNC will use this spatial data to determine whether any moving part of the machine may collide with fixed elements such as the table, fixtures and machine structure. All this occurs in realtime.

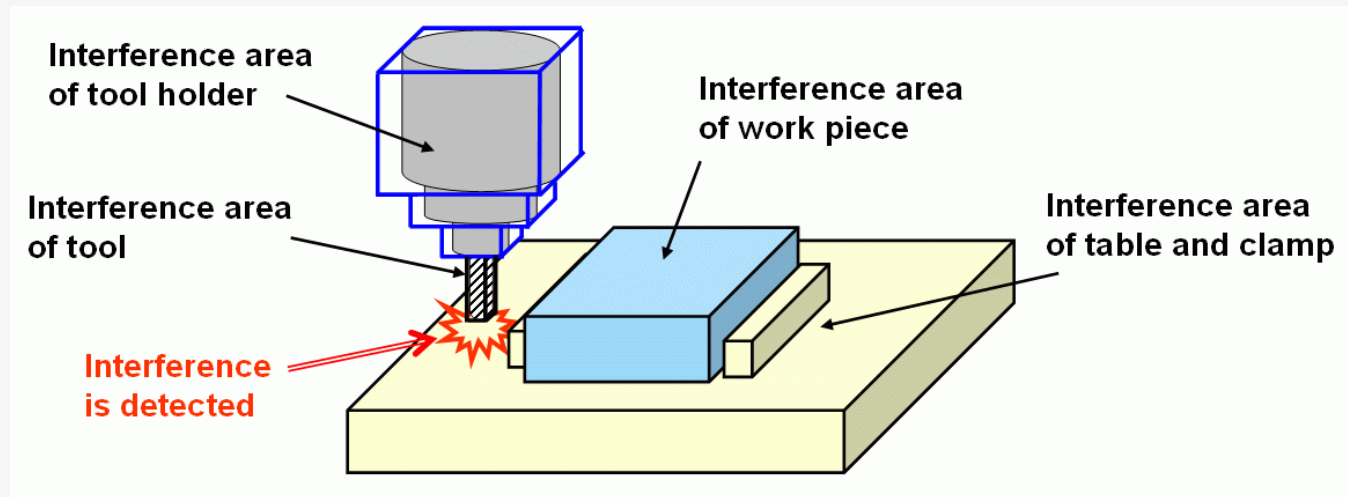

The collision can be checked by detecting the interference among machine parts such as tool, work-piece and table in three dimensional space in real time. This function is the measure for an expensive workpiece to be protected from being damaged. This function is also useful in manual operation, for example, for protection against malfunction during setup. Thus, the time required for setup can be reduced.

With the M series, the interference check targets include a tool, tool holder, workpiece, jig, and table. With the T series, the interference check targets include a single point tool + tip, tool post, workpiece, chuck, and spindle.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Key functions

- 3D Interference Check Among Objects Like Tool, Work Piece, Etc.
- Each Interference Area of Tool or Work Piece or Table, Etc. Consists of Rectangular Parallelepipeds
- The function is effective also with 5-axis Machining (Rotary Tool, Table, Etc.)
- The function is available in both Auto and Manual modes
- The function is embedded in the CNC Kernel (High-Speed CPU is required)
- Up to 4 paths are supported
- Easy definition of interference check figure on setting screen: each objects can be built up with up to 6 shapes (Parallelepipeds, Cylinders or Planes). The system provides database information for up to 150 Shapes, which can be arbitrary combined to built up to 10 registerable tool holder and 10 registerable objects
- Interference check figures can be switched by the Part Program
- Each tool specified by the Parts Program is automatically considered as rectangular parallelepiped or cylinder of the proper size
- Interference between tool and workpiece is checked in rapid traverse

The PC software "Built-in 3D Interference Check Setting Tool is available to create the shapes and the 3D model of the machine working zone, the tool, holders and workpieces. It can import 3D object from CAD-CAM systems as well as show the process in real-time when connected to the CNC over Ethernet.

Benefits

- No negative influence on the machining time
- Protect the machine, the tools and fixtures
- Reduced downtime
- Quick and easy to configure
- Minimal set-up time
- Manual adaptability, also possible for the end user, e.g. for automated machinery

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-R541 | 30i-B Built-in 3-D Interference Check Function |
| A02B-0326-R541 | 31i-B5 Built-in 3-D Interference Check Function |
| A02B-0327-R541 | 31i-B Built-in 3-D Interference Check Function |
| A02B-0328-R541 | 32i-B Built-in 3D Interference Check Function |
| A02B-0353-R541 | 30i-BP Built-in 3-D Interference Check |
| A02B-0356-R541 | 31i-B5P Built-in 3-D Interference Check |
| A02B-0357-R541 | 31i-BP Built-in 3-D Interference Check |
| A02B-0358-R541 | 32i-BP Built-in 3-D Interference Check |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

119

Controlled Axis

3D Interference Check with PC Function

Features

3D Interference Check with PC Function is a set of FOCAS2 functions. These Functions enable a CAD system on a PC to use its 3D animation to check for interference between the actual machine motion and a structure such as the tool, the workpiece, or the table. If a potential interference is detected, the machine can be stopped immediately before a collision occurs.

Benefits

- Prevent damage and downtime caused by machine collisions

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------|
| A02B-0323-R542 | 30i-B 3-D Interference Check for CNC with PC Function |
| A02B-0326-R542 | 31i-B5 3-D Interference Check for CNC with PC Function |
| A02B-0327-R542 | 31i-B 3-D Interference Check for CNC with PC Function |
| A02B-0328-R542 | 32i-B 3-D Interference Check for CNC with PC Function |
| A02B-0353-R542 | 30i-BP 3-D Interference Check for CNC with PC Function |
| A02B-0356-R542 | 31i-B5P 3-D Interference Check for CNC with PC Function |
| A02B-0357-R542 | 31i-BP 3-D Interference Check for CNC with PC Function |
| A02B-0358-R542 | 32i-BP 3-D Interference Check for CNC with PC Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

120

Controlled Axis

Machining Simulation with PC Function

Features

Machining Simulation with PC is a set of FOCAS2 functions, similar to 3D Interference Check with PC. MTBs can create simulation software with this functions that performs an interference check. This check is performed prior to the actual machining, the machine itself does not move during the check.

Benefits

- Prevent damage and downtime caused by machine collisions

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0339-R013 | 0i-TF Machining Simulation with PC |
| A02B-0340-R013 | 0i-MF Machining Simulation with PC |
| A02B-0349-R013 | 0i-TFP Machining Simulation with PC |
| A02B-0350-R013 | 0i-MFP Machining Simulation with PC |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

121

Controlled Axis

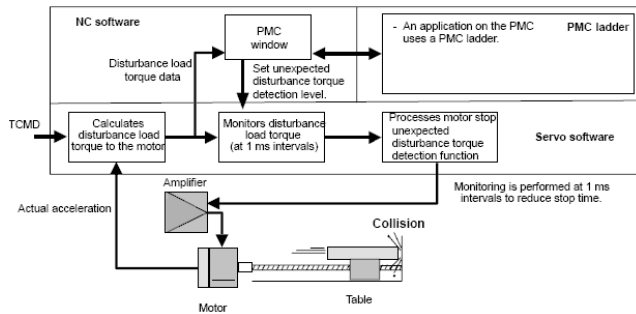

Unexpected Disturbance Torque Detection Function

Features

Machine collisions, as well as defective and damaged cutters impose a large load torque on the servo and spindle motors, compared with normal rapid traverse or cutting feed.

The Unexpected Disturbance Torque Detection function detects the disturbance torque on the motors and sends this value as an estimated load torque to the PMC.

If the detected disturbance torque value is outside of the specification / expected value (greater than the value specified in the corresponding parameter), the function either stops the servo motor as quickly as possible or reverses the motor by an appropriate value (as specified in another parameter), in order to minimize possible damage to the machine.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Detection of possible machine collision situations as well as other situations where damage may arise

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------|
| A02B-0323-J718 | 30i-B Unexpected Disturbance Torque Detection Function |
| A02B-0326-J718 | 31i-B5 Unexpected Disturbance Torque Detection Function |
| A02B-0327-J718 | 31i-B Unexpected Disturbance Torque Detection Function |
| A02B-0328-J718 | 32i-B Unexpected Disturbance Torque Detection Function |
| A02B-0333-J718 | 35i-B Unexpected Disturbance Torque Detection Function |
| A02B-0334-J718 | PM i-A Unexpected Disturbance Torque Detection Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

122

Controlled Axis

Unexpected Disturbance Torque Detection for BETA i I/O Link

Features

Machine collisions, as well as defective and damaged cutters impose a large load torque on the servo and spindle motors, compared with normal rapid traverse or cutting feed.

The Unexpected Disturbance Torque Detection function for BETA i I/O Link provides this function on the separate amplifiers of the BETA i series which can be connected to the CNC using the I/O Link network.

Benefits

- Detection of possible machine collision situations as well as other situations where damage may arise

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------|
| A02B-0323-S812 | 30i-B BETA I/O LINK Unexpected Disturbance Torque Detection Function |
| A02B-0326-S812 | 31i-B5 BETA I/O LINK Unexpected Disturbance Torque Detection Function |
| A02B-0327-S812 | 31i-B BETA I/O LINK Unexpected Disturbance Torque Detection Function |
| A02B-0328-S812 | 32i-B BETA I/O LINK Unexpected Disturbance Torque Detection Function |
| A02B-0333-S812 | 35i-B BETA I/O LINK Unexpected Disturbance Torque Detection Function |
| A02B-0334-S812 | PM i-A BETA I/O LINK Unexpected Disturbance Torque Detection Function |
| A02B-0339-S812 | 0i-TF I/O LINK BETA Unexpected Disturbance Torque Detection |
| A02B-0340-S812 | 0i-MF I/O LINK BETA Unexpected Disturbance Torque Detection |
| A02B-0349-S812 | 0i-TFP I/O-Link BETA Unexpected Disturbance Torque Detection |
| A02B-0350-S812 | 0i-MFP I/O-Link BETA Unexpected Disturbance Torque Detection |
| A02B-0353-S812 | 30i-BP I/O-LINK BETA Unexpected Disturbance Torque Detection |
| A02B-0356-S812 | 31i-B5P I/O-LINK BETA Unexpected Disturbance Torque Detection |
| A02B-0357-S812 | 31i-BP I/O-LINK BETA Unexpected Disturbance Torque Detection |
| A02B-0358-S812 | 32i-BP I/O-LINK BETA Unexpected Disturbance Torque Detection |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

123

Controlled Axis



FINE TORQUE SENSING GRAPH 00123 N00000

Fine Torque Sensing

Features

The Fine Torque Sensing function stores the disturbance torque detected by a servo motor or a spindle motor in the internal memory of the CNC for later evaluation and analysis.

Following operations are available for the stored torque data:

- The stored torque data can be read via the window function of the PMC and be used in the PMC program for actions
- Statistics data (average, maximum, dispersion) of the stored torque is calculated by the CNC, and the results of these statistical calculation can also be read using the window function of the PMC
- The stored torque data can be displayed graphically on Torque Graph Screen of the CNC and displayed on the operation screen
- The detection level of the unexpected disturbance load torque alarm can be set on Torque Graph Screen. To use this capability, the Unexpected Disturbance Torque Detection function must be set in the CNC
- The stored torque data can be saved into the F-ROM memory of the CNC as sample data, and it is possible to compare this stored values graphically with other reference torque data.
- The stored torque data can also be saved to the memory card.

Notes

- In the stand-alone type CNC and the 15 inch LCD mounted CNC of the Series 30i, this function and the communication to Personal Computer or Panel i via HSSB cannot be used at the same time.
- In the 7.2 inch, 8.4 inch and 10.4 inch LCD mounted type CNC Series, this function and the communication to Personal Computer or Panel i via the 2nd HSSB channel cannot be used at the same time.

Benefits

- Advanced function to analyse the torque behaviour during machining
- Possibility to visualize and set limits for the Disturbance Load detection directly on the screen
- Possibility to monitor torque behaviour to find issues on the mechanical structure of the machine
- Analysis of the actual behaviour of the machine versus a stored reference profile

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------------|
| A02B-0323-J982 | 30i-B Fine Torque Sensing - Cannot be Specified with Open CNC PANEL i 15.0" LCD |
| A02B-0326-J982 | 31i-B5 Fine Torque Sensing - Cannot be Specified with Open CNC PANEL i 15.0" LCD |
| A02B-0327-J982 | 31i-B Fine Torque Sensing - Cannot be Specified with Open CNC PANEL i 15.0" LCD |
| A02B-0328-J982 | 32i-B Fine Torque Sensing |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|-----------------------------|
| A02B-0353-J982 | 30i-BP Fine Torque Sensing |
| A02B-0356-J982 | 31i-B5P Fine Torque Sensing |
| A02B-0357-J982 | 31i-BP Fine Torque Sensing |
| A02B-0358-J982 | 32i-BP Fine Torque Sensing |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

125

Controlled Axis

Rotary Axis Control

Features

The Rotary Axis Control function controls a rotary axis as specified by an absolute command. With this function, the sign of the value specified in the command is interpreted as the direction of rotation, and the absolute value of the specified value is interpreted as the coordinates of the target end position.

This function is valid when rotary axis roll-over is enabled. If the parameter is set, an absolute command specified for the rollover rotary axis is interpreted as follows: the sign and absolute value of the value specified in the command represent the direction of rotation and the end position of movement respectively.

Benefits

- Simplifies the management of rotary axes

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-J743 | 30i-B Rotary Axis Control |
| A02B-0326-J743 | 31i-B5 Rotary Axis Control |
| A02B-0327-J743 | 31i-B Rotary Axis Control |
| A02B-0328-J743 | 32i-B Rotary Axis Control |
| A02B-0353-J743 | 30i-BP Rotary Axis Control |
| A02B-0356-J743 | 31i-B5P Rotary Axis Control |
| A02B-0357-J743 | 31i-BP Rotary Axis Control |
| A02B-0358-J743 | 32i-BP Rotary Axis Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

126

Controlled Axis

Position Switch

Features

The Position Switch function outputs signals to the PMC while the machine coordinates along a controlled axes are within a parameter-specified ranges. This creates a virtual "cam switch" function.

Using parameters, it is possible to specify arbitrary controlled axes and machine coordinate operating ranges for which position switch signals are output.

Up to 10 position switch signals can be output. Parameter can be set to use up to 16 position switch signals.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- A signal can be sent to machine at certain positions to initiate automatic actions
- No hardware to adjust to change "trip" positions of up to 10 switches - Just change coordinate value in parameters
- Improves machine reliability by simplifying machine wiring

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0323-J846 | 30i-B Position Switch |
| A02B-0326-J846 | 31i-B5 Position Switch |
| A02B-0327-J846 | 31i-B Position Switch |
| A02B-0328-J846 | 32i-B Position Switch |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

127

Controlled Axis

High-Speed Position Switch

Features

The High-Speed Position Switch function monitors the current position at shorter intervals than the normal position switch function to output a high-speed precise position switch signal.

In the same way as for the normal position switch function, it is possible to set parameters to specify arbitrary controlled axes and machine coordinate operating ranges for which position switch signals are output.

Up to 6 high-speed position signals can be output. Additional settings are available to use up to 16 high-speed position switch signals.

Benefits

- A high-speed signal can be sent to the machine at certain positions to initiate automatic actions
- No hardware to adjust to change "trip" positions of up to 6 switches - Just change coordinate value in parameters
- Improves machine reliability by simplifying machine wiring

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------|
| A02B-0323-J987 | 30i-B High-Speed Position Switch |
| A02B-0326-J987 | 31i-B5 High-Speed Position Switch |
| A02B-0327-J987 | 31i-B High-Speed Position Switch |
| A02B-0328-J987 | 32i-B High-Speed Position Switch |
| A02B-0333-R704 | 35i-B High-Speed Position Switch - Incl. Direction-Dependent Type of High-Speed Position Switch |
| A02B-0334-R704 | PM i-A High-Speed Position Switch |
| A02B-0339-J987 | 0i-TF High-Speed Position Switch |
| A02B-0340-J987 | 0i-MF High-Speed Position Switch |
| A02B-0349-J987 | 0i-TFP High-Speed Position Switch |
| A02B-0350-J987 | 0i-MFP High-Speed Position Switch |
| A02B-0353-J987 | 30i-BP High-Speed Position Switch |
| A02B-0356-J987 | 31i-B5P High-Speed Position Switch |
| A02B-0357-J987 | 31i-BP High-Speed Position Switch |
| A02B-0358-J987 | 32i-BP High-Speed Position Switch |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

128

Controlled Axis

Direction-Dependent Type of High-Speed Position Switch

Features

The High-Speed Position Switch function monitors the machine coordinates and move direction to output high-speed position switch signals to drive additional processes on the machine.

Two machine coordinates are monitored. When the tool passes through one coordinate in the specified direction, the high-speed position switch signal is set to 1. When it passes through the other coordinate in the specified direction, the signal is set to 0.

The output mode of high-speed position switch signals (normal type or direction-dependent type) is set using parameters.

Benefits

- A high-speed signal can be sent to the machine at certain positions to initiate automatic actions
- Actions can be set depending on the movement direction
- No hardware to adjust to change "trip" positions of the switches
- Improves machine reliability by simplifying machine wiring

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------|
| A02B-0323-S721 | 30i-B Direction-Dependent Type of High-Speed Position Switch |
| A02B-0326-S721 | 31i-B5 Direction-Dependent Type of High-Speed Position Switch |
| A02B-0327-S721 | 31i-B Direction-Dependent Type of High-Speed Position Switch |
| A02B-0328-S721 | 32i-B Direction-Dependent Type of High-Speed Position Switch |
| A02B-0353-S721 | 30i-BP Direction-Dependant Type of High-Speed Position Switch |
| A02B-0356-S721 | 31i-B5P Direction-Dependant Type of High-Speed Position Switch |
| A02B-0357-S721 | 31i-BP Direction-Dependant Type of High-Speed Position Switch |
| A02B-0358-S721 | 32i-BP Direction-Dependant Type of High-Speed Position Switch |

Notice


Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

129

Controlled Axis

Reference mark 1 Reference mark 2 Reference mark 1 Reference mark 2 Reference mark 1

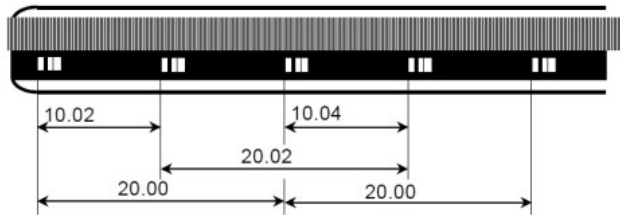

Linear Scale Interface with Absolute Address Reference Mark

Features

With the Linear Scale Interface with Absolute Address (Distance Coded) Reference Mark function, an absolute position can be identified with a distance coded linear/rotary encoder.

For calculating the absolute position the axis must detect minimum 2 reference marks. In this case, a reference position can be established at any position of the axis by short distance movement.

A/B-phase Interface - Absolute Address Referenced Mark

- The encoder with Absolute Address Referenced Mark (A/B-phase) interface requires the SDU (Separate Detector Unit).
- The encoder is then used as separate feedback
- In this case a fully closed system is created

Serial type Interface - Distance Coded Reference Marks

- The encoder with Distance Coded Reference Marks and with sinusoidal 1Vpp interface requires the High Resolution Serial Output Circuit (type C)
- If the High Resolution Output Circuit is connected to the servo amplifier, then the encoder is used as motor feedback; in this case a semi-closed system is created
- If the High Resolution Output Circuit is connected to the SDU, then the encoder is used as separate feedback; in this case a fully closed system is created

Benefits

- Simplified integration of distance coded scales
- Increase of the precision of the machine tool

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------|
| A02B-0323-J670 | 30i-B Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0326-J670 | 31i-B5 Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0327-J670 | 31i-B Linear Scale Interface with Absolute Address Reference Mark |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|---------------------------------------------------------------------|
| A02B-0328-J670 | 32i-B Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0333-J670 | 35i-B Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0334-J670 | PM i-A Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0339-J670 | 0i-TF Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0340-J670 | 0i-MF Linear Scale Interface with Absolute Reference Mark |
| A02B-0349-J670 | 0i-TFP Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0350-J670 | 0i-MFP Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0353-J670 | 30i-BP Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0356-J670 | 31i-B5P Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0357-J670 | 31i-BP Linear Scale Interface with Absolute Address Reference Mark |
| A02B-0358-J670 | 32i-BP Linear Scale Interface with Absolute Address Reference Mark |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

131

Controlled Axis

Linear Scale I/F Expansion with Absolute Address Reference Mark

Features

With the Linear Scale Interface Expansion with Absolute Address Reference Mark, a reference position can be established without executing the reference position return operation if a distance coded encoder is used. If a G00 command or a move command based on jog feed is specified, this function enables a reference mark interval measurement to be made automatically in order to establish a reference position.

The Linear Scale Interface with Absolute Address Reference Mark option is also necessary to use this function.

Benefits

- Simplified integration of distance coded scales
- Increase of the precision of the machine tool

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------|
| A02B-0323-S730 | 30i-B Linear Scale Interface Expansion with Absolute Address Reference Mark |
| A02B-0326-S730 | 31i-B5 Linear Scale Interface Expansion with Absolute Address Reference Mark |
| A02B-0327-S730 | 31i-B Linear Scale Interface Expansion with Absolute Address Reference Mark |
| A02B-0328-S730 | 32i-B Linear Scale Interface Expansion with Absolute Address Reference Mark |
| A02B-0333-S730 | 35i-B Linear Scale Interface Expansion with Absolute Address Reference Mark |
| A02B-0334-S730 | PM i-A Linear Scale Interface Expansion with Absolute Address Reference Mark |
| A02B-0339-S730 | 0i-TF Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0340-S730 | 0i-MF Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0349-S730 | 0i-TFP Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0350-S730 | 0i-MFP Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0353-S730 | 30i-BP Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0356-S730 | 31i-B5P Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0357-S730 | 31i-BP Linear Scale with Absolute Address Reference Mark Expansion |
| A02B-0358-S730 | 32i-BP Linear Scale with Absolute Address Reference Mark Expansion |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

132

Controlled Axis

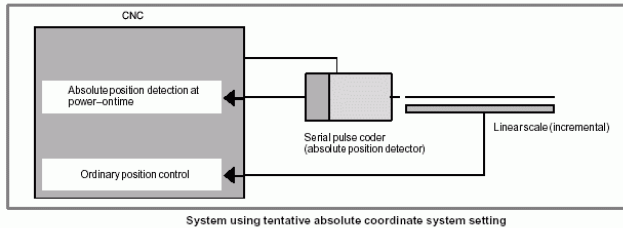

Temporary Absolute Coordinate Setting

Features

In a full-closed system with a built-in absolute position detector (serial pulse coder) and incremental linear scale, a coordinate system can be set up using the absolute position data received from the built-in absolute position detector when the power is switched on.

After the startup procedure, the position control is carried out using the linear scale with incremental data.

Since the machine position obtained immediately after the power is switched on is tentative, obtaining the accurate machine position requires making a manual reference position return.

For safety reasons and before a reference position return is made, this function enables a stroke limit, although the machine position obtained when the power is switched on is approximate.

Note that this function does not substitute to the use of a real absolute detection system as the main position measurement remains incremental.

Benefits

- Provides a simplified startup procedure for incremental scales

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-J786 | 30i-B Temporary Absolute Coordinate Setting |
| A02B-0326-J786 | 31i-B5 Temporary Absolute Coordinate Setting |
| A02B-0327-J786 | 31i-B Temporary Absolute Coordinate Setting |
| A02B-0328-J786 | 32i-B Temporary Absolute Coordinate Setting |
| A02B-0339-J786 | 0i-TF Temporary Absolute Coordinate Setting |
| A02B-0340-J786 | 0i-MF Temporary Absolute Coordinate Setting |
| A02B-0349-J786 | 0i-TFP Temporary Absolute Coordinate Setting |
| A02B-0350-J786 | 0i-MFP Temporary Absolute Coordinate Setting |
| A02B-0353-J786 | 30i-BP Temporary Absolute Coordinate Setting |
| A02B-0356-J786 | 31i-B5P Temporary Absolute Coordinate Setting |
| A02B-0357-J786 | 31i-BP Temporary Absolute Coordinate Setting |
| A02B-0358-J786 | 32i-BP Temporary Absolute Coordinate Setting |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

133

Controlled Axis

Axis Immediate Stop Function

Features

The Axis Immediate Stop function can be used to stop motors immediately during AI Contour Control and control the position at the same time.

This mode of operation can be required on certain machine where the immediate stop by emergency stop is not sufficient, for instance since it does not control position.

Procedure

- Change of acceleration / deceleration before interpolation in AI contour mode
- Feed axes stop
- Output of an alarm message

Notes

- AI Contour Control I (S807) or AI Contour Control II (S808) option is required.

This function cannot be performed to an axis under the the control with following functions.

- PMC axis control
- Chopping function
- Polygon turning
- EGB function
- Live tool control with servo motor
- Spindle control of Cs contouring control

Benefits

- Reduction of the stop distance by changing the acceleration rate of the acceleration/deceleration before interpolation
- The position control remains valid during a series of stop sequence
- Safer and controlled stop to protect the machine

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-R613 | 30i-B Axis Immediate Stop Function |
| A02B-0326-R613 | 31i-B5 Axis Immediate Stop Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0327-R613 | 31i-B Axis Immediate Stop Function |
| A02B-0328-R613 | 32i-B Axis Immediate Stop Function |
| A02B-0339-R613 | 0i-TF Axis Immediate Stop Function |
| A02B-0340-R613 | 0i-MF Axis Immediate Stop Function |
| A02B-0349-R613 | 0i-TFP Axis Immediate Stop Function |
| A02B-0350-R613 | 0i-MFP Axis Immediate Stop Function |
| A02B-0353-R613 | 30i-BP Axis Immediate Stop Function |
| A02B-0356-R613 | 31i-B5P Axis Immediate Stop Function |
| A02B-0357-R613 | 31i-BP Axis Immediate Stop Function |
| A02B-0358-R613 | 32i-BP Axis Immediate Stop Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

135

Controlled Axis

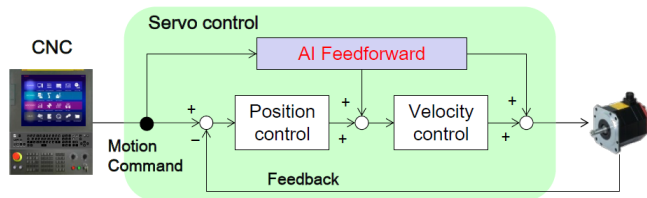

AI Feedforward

Features

AI Feedforward is an advanced feedforward function for FANUC's servo control. It improves machining precision by minimizing contouring error and eliminating machine vibration. The parameters of AI Feedforward are automatically optimized according to the machine characteristic by Machine Learning with SERVO GUIDE. No expert knowledge is necessary to tune the AI Feedforward function. This greatly simplifies startup of the AI Feedforward function, reducing time to market and saving R&D resources.

Benefits

- Reduce time to market
- Save R&D resources
- Improve machine accuracy

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0323-R368 | 30i-B AI Feed Forward |
| A02B-0326-R368 | 31i-B5 AI Feed Forward |
| A02B-0327-R368 | 31i-B AI Feed Forward |
| A02B-0328-R368 | 32i-B AI Feed Forward |
| A02B-0340-R368 | 0i-MF AI Feed Forward |
| A02B-0349-R368 | 0i-TFP AI Feed Forward |
| A02B-0350-R368 | 0i-MFP AI Feed Forward |
| A02B-0353-R368 | 30i-BP AI Feed Forward |
| A02B-0356-R368 | 31i-B5P AI Feed Forward |
| A02B-0357-R368 | 31i-BP AI Feed Forward |
| A02B-0358-R368 | 32i-BP AI Feed Forward |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

136

Controlled Axis

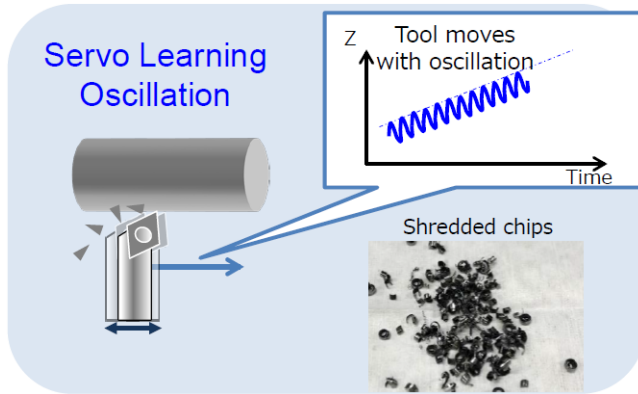

Servo Learning Oscillation

Features

Servo Learning Oscillation allows you perform oscillation cutting in turning applications. The function lets the tool oscillate along the cutting direction. By applying Servo Learning Control, this is done without compromising accuracy.

The oscillating tool produces small chips and avoids entanglement of large, twisted chips to the tool or workpiece. As you do not have to unwind the chips from the tool or workpiece, downtime is minimized. The disposal of the chips is simplified as well.

Benefits

- Avoid entangled chips and minimize downtime
- Simplifies disposal of chips

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R162 | 30i-B Servo Learning Oscillation (1 Axis) |
| A02B-0326-R162 | 31i-B5 Servo Learning Oscillation (1 Axis) |
| A02B-0327-R162 | 31i-B Servo Learning Oscillation (1 Axis) |
| A02B-0328-R162 | 32i-B Servo Learning Oscillation (1 Axis) |
| A02B-0339-R162 | 0i-TF Servo Learning Oscillation (1 Axis) |
| A02B-0340-R162 | 0i-MF Servo Learning Oscillation (1 Axis) |
| A02B-0349-R162 | 0i-TFP Servo Learning Oscillation (1 Axis) |
| A02B-0350-R162 | 0i-MFP Servo Learning Oscillation (1 Axis) |
| A02B-0353-R162 | 30i-BP Servo Learning Oscillation (1 Axis) |
| A02B-0356-R162 | 31i-B5P Servo Learning Oscillation (1 Axis) |
| A02B-0357-R162 | 31i-BP Servo Learning Oscillation (1 Axis) |
| A02B-0358-R162 | 32i-BP Servo Learning Oscillation (1 Axis) |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

137

Controlled Axis

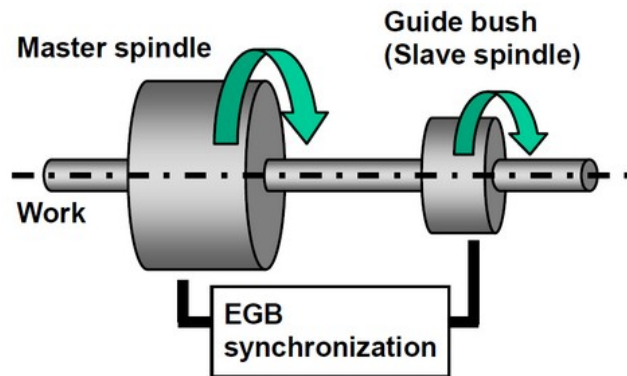

Spindle Synchronous Control for Guide Bush

Features

In order to control an axis (slave spindle axis) to follow an axis (master spindle axis) synchronously between two spindle axes, the function “Spindle Electronic Gear Box” called “Spindle EGB” or “Simple spindle EGB” can be used. Both functions require Cs contour control to the slave axis.

With the “Spindle Synchronous Control for Guide Bush”, a similar functionality as for the Simple Spindle EGB can be realized WITHOUT using Cs contour control for the slave axis.

When this function is used, the additional control axis is not necessary because there is no Cs contour control axis.

Benefits

- Simplification of the implementation of spindle synchronization for a rotary guide bush

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-R420 | 30i-B Spindle Synchronous Control for Guide Bush |
| A02B-0326-R420 | 31i-B5 Spindle Synchronous Control for Guide Bush |
| A02B-0327-R420 | 31i-B Spindle Synchronous Control for Guide Bush |
| A02B-0328-R420 | 32i-B Spindle Synchronous Control for Guide Bush |
| A02B-0339-R420 | 0i-TF Spindle Synchronous Control for Guide Bush |
| A02B-0340-R420 | 0i-MF Spindle Synchronous Control for Guide Bush |
| A02B-0349-R420 | 0i-TFP Spindle Synchronous Control for Guide Bush |
| A02B-0350-R420 | 0i-MFP Spindle Synchronous Control for Guide Bush |
| A02B-0353-R420 | 30i-BP Spindle Synchronous Control for Guide Bush |
| A02B-0356-R420 | 31i-B5P Spindle Synchronous Control for Guide Bush |
| A02B-0357-R420 | 31i-BP Spindle Synchronous Control for Guide Bush |
| A02B-0358-R420 | 32i-BP Spindle Synchronous Control for Guide Bush |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

138

Functions

Operation

This section of the catalogue contains the functions related to operation or ease of operation of the CNC system.

The CNCs feature powerful functions for programming and/or operating the machine. Some of these functions are specifically designed for Turning Machines, some are for Machining Centers and some can be used in both applications.

Some of the operation functions detailed in the catalogue:

- Referencing
- Manual functions
- Assisted manual functions
- Program stop and restart
- Tool retract and recover
- 3-dimensional manual functions
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

139

Operation

Sequence Number Comparison and Stop

Features

The Sequence Number Comparison and Stop function can be used by the operator during the setup phase of a parts program.

The operator can set a sequence number through the MDI panel. When a block containing the specified sequence number appears in the program being executed, the machine operation enters the single block mode after the block is executed. This function is useful for checking a program, because the program can be stopped at a desired position without modifying the program.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplifies program check
- Reduces the commissioning time and increases efficiency

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-J844 | 30i-B Sequence Number Comparison & Stop |
| A02B-0326-J844 | 31i-B5 Sequence Number Comparison & Stop |
| A02B-0327-J844 | 31i-B Sequence Number Comparison & Stop |
| A02B-0328-J844 | 32i-B Sequence Number Comparison & Stop |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

140

Operation

Program Restart

Features

With the Program Restart function, the operator can restart machining from a desired block by specifying the sequence number of the desired block or by specifying the number of blocks from the beginning of the program to the block at which he wishes machining to restart.


This function is a basic function in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Enables the operator to restart the program following an interruption such as a tool break or a tool change, or following cancellation of an emergency-stop
- Allows for safe restarting of the program when the machine has been left in an unknown state – following a shift change or a vacation break, for instance
- A programmer or operator can use this function as a mechanism to check out a new or revised part program. By specifying the restart at that block in the program where changes have been made, for instance, he can test out precisely the affected portion

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0323-J838 | 30i-B Program Restart |
| A02B-0326-J838 | 31i-B5 Program Restart |
| A02B-0327-J838 | 31i-B Program Restart |
| A02B-0328-J838 | 32i-B Program Restart |
| A02B-0353-J838 | 30i-BP Program Restart |
| A02B-0356-J838 | 31i-B5P Program Restart |
| A02B-0357-J838 | 31i-BP Program Restart |
| A02B-0358-J838 | 32i-BP Program Restart |

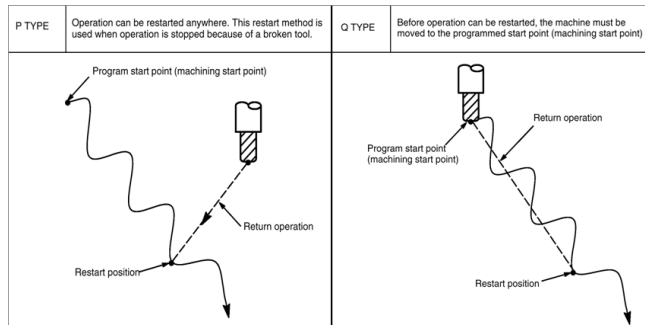

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

141

Operation

Auxiliary Function Output in Program Restart

Features

The Auxiliary Function Output During Program Restart function intercepts the M/S/T/B codes encountered during Program Restart (i.e. between the start of the program and the specified Program Restart block) and outputs those codes to the MDI screen in the correct sequence.

Benefits

- Relieves the operator of the task of re-keying the MDI codes currently displayed during Program Restart
- Ensures that all M/S/T/B codes encountered during Program Restart are output to MDI screen display and are executed in the correct sequence (current Program Restart function limits the number of codes displayed, which may cause the operator to miss some codes that may have fallen out of the display buffer)
- Macro call M-codes are executed properly when encountered

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------|
| A02B-0323-R576 | 30i-B Output of Auxiliary Function in Program Restart Function |
| A02B-0326-R576 | 31i-B5 Output of Auxiliary Function in Program Restart Function |
| A02B-0327-R576 | 31i-B Output of Auxiliary Function in Program Restart Function |
| A02B-0328-R576 | 32i-B Output of Auxiliary Function in Program Restart Function |
| A02B-0353-R576 | 30i-BP Auxiliary Function output in Program Restart Function |
| A02B-0356-R576 | 31i-B5P Auxiliary Function Output in Program Restart Function |
| A02B-0357-R576 | 31i-BP Auxiliary Function Output in Program Restart Function |
| A02B-0358-R576 | 32i-BP Auxiliary Function Output in Program Restart Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

142

Operation

Quick Program Restart

Features

The Quick Program Restart function includes the conventional Program Restart functionality and provides additionally multiple ways of efficient program restart based on program restart memory.

Appropriate information on a dedicated screen helps the operator to select the restarting block easily.

With the newer function "Quick Program Restart II" the restart processing time is shortened in long part program by using direct search method. Only machining center systems can use the "Quick Program Restart II" function.

Quick Program Restart is a basic function in 0i-LF Plus.

Benefits

- Enables the operator to restart the program following an interruption such as a tool break or a tool change, or following cancellation of an emergency-stop
- Allows for safe restarting of the program when the machine has been left in an unknown state – following a shift change or a vacation break, for instance
- Allows for efficient restarting of the program when operating with large part programs and the machine state can be easily preset manually
- A programmer or operator can use this function as a mechanism to check out a new or revised part program. By specifying the restart at that block in the program where changes have been made, for instance, he can test out precisely the affected portion

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-R414 | 30i-B Quick Program Restart II |
| A02B-0323-R630 | 30i-B Quick Program Restart |
| A02B-0326-R414 | 31i-B5 Quick Program Restart II |
| A02B-0326-R630 | 31i-B5 Quick Program Restart |
| A02B-0327-R414 | 31i-B Quick Program Restart II |
| A02B-0327-R630 | 31i-B Quick Program Restart |
| A02B-0328-R414 | 32i-B Quick Program Restart II |
| A02B-0328-R630 | 32i-B Quick Program Restart |
| A02B-0339-R630 | 0i-TF Quick Program Restart |
| A02B-0340-R414 | 0i-MF Quick Program Restart II |
| A02B-0340-R630 | 0i-MF Quick Program Restart |
| A02B-0349-R630 | 0i-TFP Quick Program Restart |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

143

| Specification | Description |
|----------------|---------------------------------|
| A02B-0350-R630 | 0i-MFP Quick Program Restart |
| A02B-0353-R414 | 30i-BP Quick Program Restart II |
| A02B-0353-R630 | 30i-BP Quick Program Restart |
| A02B-0356-R630 | 31i-B5P Quick Program Restart |
| A02B-0357-R414 | 31i-BP Quick Program Restart II |
| A02B-0357-R630 | 31i-BP Quick Program Restart |
| A02B-0358-R630 | 32i-BP Quick Program Restart |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

144 Operation

Restart Point Keeping of Quick Program Restart

Features

If the restart of a program using the "Search Method" is interrupted, parts of the program restart memory are deleted. This function maintains the content of the program restart memory even if the restart operation is interrupted.


Quick Program Restart (R630) is required.

Benefits

- Prevent loss of the restart point by unintentional operation

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R325 | 30i-B Restart Point Keeping of Quick Program Restart |
| A02B-0326-R325 | 31i-B5 Restart Point Keeping of Quick Program Restart |
| A02B-0327-R325 | 31i-B Restart Point Keeping of Quick Program Restart |
| A02B-0328-R325 | 32i-B Restart Point Keeping of Quick Program Restart |
| A02B-0339-R325 | 0i-TF Restart Point Keeping of Quick Program Restart |
| A02B-0340-R325 | 0i-MF Restart Point Keeping of Quick Program Restart |
| A02B-0349-R325 | 0i-TFP Restart Point Keeping of Quick Program Restart |
| A02B-0350-R325 | 0i-MFP Restart Point Keeping of Quick Program Restart |

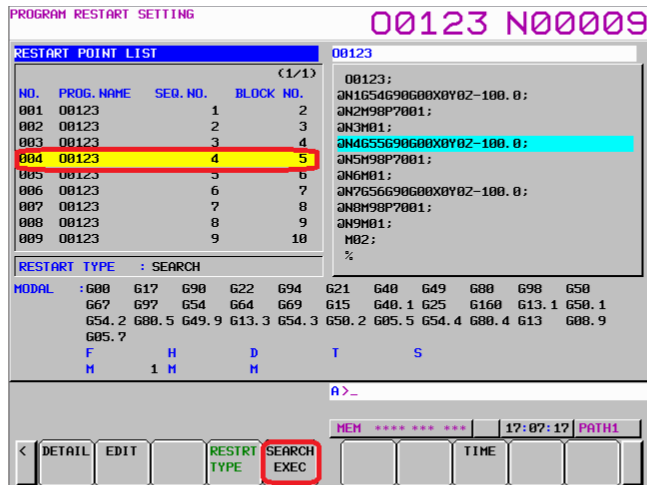


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

145

Operation

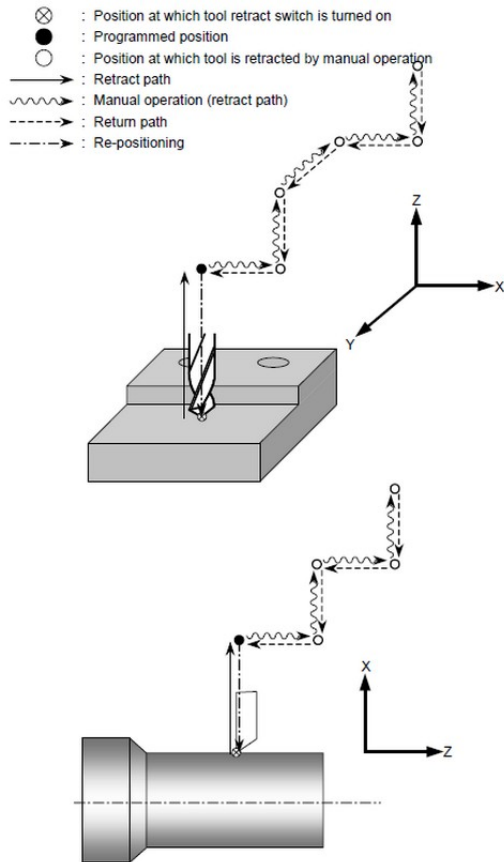

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Tool Retract and Recover

Features

With the Tool Retract and Recover function the tool can be retracted from the workpiece when it is damaged, when it has to be replaced or when status of the machining has to be checked. The retraction position has to be specified with a program in advance. Afterwards the tool is returned to the workpiece and machining is restarted.

Example of sequence

1. When tool retraction signal is set during the execution of an automatic operation, the retraction is performed up to the retraction position specified in the program.
2. The operator switches to manual mode and moves the tool in manual operation (jog feed, incremental feed, handle feed and manual numeric command). Up to ten movement paths are automatically stored.
3. When the tool recovery signal is set, the tool automatically returns to the retraction position, moving backward along the paths along which it has moved with manual operations.
4. With cycle start, a recovery (repositioning) is performed up to the position at which the tool retraction signal was set.

Benefits

- Enables the operator to restart the program following an interruption such as a tool break or a tool change, or following cancellation of an emergency-stop
- Allows for safe restarting of the program when the machine has been left in an unknown state
- Reduction of time loss after tool break to restart operation

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J823 | 30i-B Tool Retract and Recover |
| A02B-0326-J823 | 31i-B5 Tool Retract and Recover |
| A02B-0327-J823 | 31i-B Tool Retract and Recover |
| A02B-0328-J823 | 32i-B Tool Retract and Recover |
| A02B-0339-J823 | 0i-TF Tool Retract and Recover |
| A02B-0340-J823 | 0i-MF Tool Retract and Recover |
| A02B-0349-J823 | 0i-TFP Tool Retract and Recover |
| A02B-0350-J823 | 0i-MFP Tool Retract and Recover |
| A02B-0353-J823 | 30i-BP Tool Retract and Recover |
| A02B-0356-J823 | 31i-B5P Tool Retract and Recover |
| A02B-0357-J823 | 31i-BP Tool Retract and Recover |

146

| Specification | Description |
|----------------|---------------------------------|
| A02B-0358-J823 | 32i-BP Tool Retract and Recover |

Notice


Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021


147

Operation


1. The N1 block cuts a workpiece.

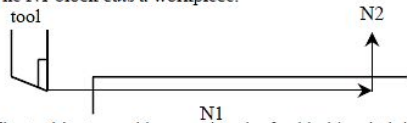


2. The tool is stopped by pressing the feed hold switch in the middle of the N1 block (point A).

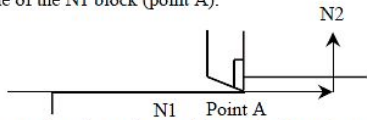

3. After retracting the tool manually to point B, tool movement is restarted.

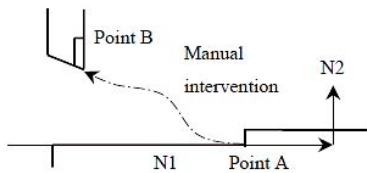

4. After automatic return to point A at the dry run feedrate by the non-linear interpolation type positioning, the remaining move command of the N1 block is executed.

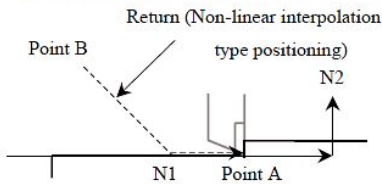

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Manual Intervention and Return

Features

With the Manual Intervention and Return function, if the tool movement is stopped by a feed hold during automatic operation, then restarted after manual intervention for the confirmation of the cutting surface etc, the tool moves back to the point before intervention and automatic operation is resumed.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits


- Simplifies operator intervention
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-R623 | 30i-B Manual Intervention and Return |
| A02B-0326-R623 | 31i-B5 Manual Intervention and Return |
| A02B-0327-R623 | 31i-B Manual Intervention and Return |
| A02B-0328-R623 | 32i-B Manual Intervention and Return |
| A02B-0349-R623 | 0i-TFP Manual Intervention and Return |
| A02B-0350-R623 | 0i-MFP Manual Intervention and Return |

148

Operation

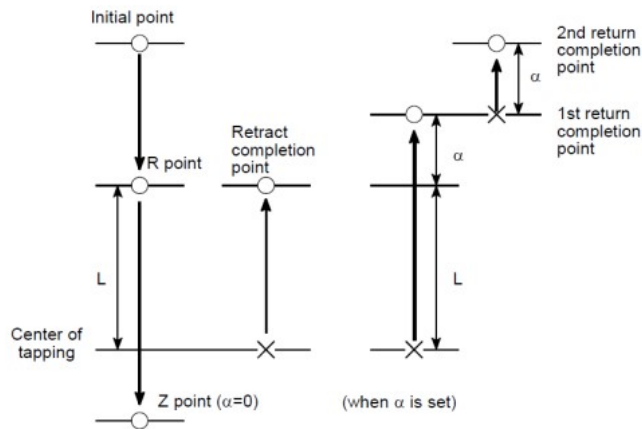

Retraction for Rigid Tapping

Features

The Retraction for Rigid Tapping function provides a way to restart a tapping operation.

When rigid tapping is stopped, either as a result of an emergency stop or a reset, the tap may cut into the workpiece. To avoid this, the tap can be drawn out using a PMC signal. The function automatically stores information related to the tapping executed most recently. Then, when a tap retraction signal is given, the tap is removed from the hole, based on the stored information. The tap is pulled toward the R point.

When a retract value ALPHA is given as parameter, the retraction distance can be increased by ALPHA.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF and 0i-MF Plus.

Benefits

- Simplifies operator intervention on tapping operations
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-J664 | 30i-B Rigid Tapping Retract |
| A02B-0326-J664 | 31i-B5 Rigid Tapping Retract |
| A02B-0327-J664 | 31i-B Rigid Tapping Retract |
| A02B-0328-J664 | 32i-B Rigid Tapping Retract |
| A02B-0339-J664 | 0i-TF Retraction of Rigid Tapping |
| A02B-0349-J664 | 0i-TFP Retraction for Rigid Tapping |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

149

Operation

Retraction for 3-Dimensional Rigid Tapping

Features

When the 3-dimensional rigid tapping or the rigid tapping during Tilted Working Plane (TWP) command is stopped by a result of the CNC power off, an emergency stop or a reset, the tap may cut into the workpiece. The tap can subsequently be drawn out by using a PMC signal or a program command.

This function automatically stores the information relating to the rigid tapping executed most recently. When a tap retraction signal is input or G30 program is commanded, the tap is removed from the hole, based on the stored information. The tap is pulled toward the R point.

When a retract value ALPHA is set in parameter, the retraction distance can be increased by ALPHA.

Benefits

- Simplifies operator intervention on tapping operations
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-R575 | 30i-B 3-D Rigid Tapping Retract |
| A02B-0326-R575 | 31i-B5 3-D Rigid Tapping Retract |
| A02B-0327-R575 | 31i-B 3-D Rigid Tapping Retract |
| A02B-0328-R575 | 32i-B 3-D Rigid Tapping Retract |
| A02B-0339-R575 | 0i-TF Retraction for 3-Dimensional Rigid Tapping |
| A02B-0340-R575 | 0i-MF Retraction for 3-Dimensional Rigid Tapping |
| A02B-0349-R575 | 0i-TFP Retraction for 3-Dimensional Rigid Tapping |
| A02B-0353-R575 | 30i-BP Retraction for 3-D Rigid Tapping |
| A02B-0356-R575 | 31i-B5P Retraction for 3-D Rigid Tapping |
| A02B-0357-R575 | 31i-BP Retraction for 3-D Rigid Tapping |
| A02B-0358-R575 | 32i-BP Retraction for 3-D Rigid Tapping |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

150

Operation

Manual 2nd/3rd/4th Reference Position Return

Features

The Manual 2nd/3rd/4th Reference Position Return function enables the 2nd, 3rd or 4th reference position return by JOG feed operation in manual reference position return mode.

Benefits

- Simplifies operator intervention
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-R558 | 30i-B Manual 2nd/3rd/4th Reference Position Return |
| A02B-0326-R558 | 31i-B5 Manual 2nd/3rd/4th Reference Position Return |
| A02B-0327-R558 | 31i-B Manual 2nd/3rd/4th Reference Position Return |
| A02B-0328-R558 | 32i-B Manual 2nd/3rd/4th Reference Position Return |
| A02B-0339-R558 | 0i-TF Manual 2nd/3rd/4th Reference Position Return Function |
| A02B-0340-R558 | 0i-MF Manual 2nd/3rd/4th Reference Position Return Function |
| A02B-0349-R558 | 0i-TFP Manual 2nd / 3rd / 4th Reference Position Return Function |
| A02B-0350-R558 | 0i-MFP Manual 2nd / 3rd / 4th Reference Position Return Function |
| A02B-0353-R558 | 30i-BP Manual 2nd / 3rd / 4th Reference Position Return Function |
| A02B-0356-R558 | 31i-B5P Manual 2nd / 3rd / 4th Reference Position Return Function |
| A02B-0357-R558 | 31i-BP Manual 2nd / 3rd / 4th Reference Position Return Function |
| A02B-0358-R558 | 32i-BP Manual 2nd / 3rd / 4th Reference Position Return Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

151

Operation

Reference Point Setting with Mechanical Stopper

Features

This function automates the procedure of butting the tool against a mechanical stopper on an axis to set a reference position.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Eliminate the variations in reference position setting that arise depending on the operator
- Minimize work required to make fine adjustments after reference position setting

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-J729 | 30i-B Mechanical Stopper Referencing |
| A02B-0326-J729 | 31i-B5 Mechanical Stopper Referencing |
| A02B-0327-J729 | 31i-B Mechanical Stopper Referencing |
| A02B-0328-J729 | 32i-B Mechanical Stopper Referencing |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

152

Operation

Reference Point Setting with Mechanical Stopper for Feed Axis Synchronization Control

Features

This function enables the reference point setting with mechanical stopper method if the axis is under feed axis synchronization control. The reference point setting is performed to the master axis and the slave axis of the feed axis synchronization control.

Benefits

- Expand the application range of the reference point setting with mechanical stopper method

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------|
| A02B-0323-R627 | 30i-B Reference Position Setting with Mechanical Stopper for Feed Axis Synchronization Control |
| A02B-0326-R627 | 31i-B5 Reference Position Setting with Mechanical Stopper for Feed Axis Synchronization Control |
| A02B-0327-R627 | 31i-B Reference Position Setting with Mechanical Stopper for Feed Axis Synchronization Control |
| A02B-0328-R627 | 32i-B Reference Position Setting with Mechanical Stopper for Feed Axis Synchronization Control |
| A02B-0333-R627 | 35i-B Reference Position Setting with Mechanical Stopper for Feed Axis Synchronization Control |
| A02B-0334-R627 | PM i-A Reference Position Setting with Mechanical Stopper for Feed Axis Synchronisation Control |
| A02B-0353-R627 | 30i-BP Reference Position Setting with Mechanical Stopper for Axis Synchronous Control |
| A02B-0356-R627 | 31i-B5P Reference Position Setting with Mechanical Stopper for Axis Synchronous Control |
| A02B-0357-R627 | 31i-BP Reference Position Setting with Mechanical Stopper for Axis Synchronous Control |
| A02B-0358-R627 | 32i-BP Reference Position Setting with Mechanical Stopper for Axis Synchronous Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

153

Operation

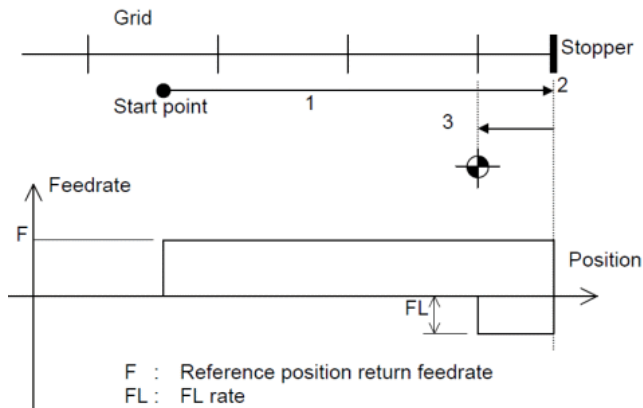

Reference Point Setting with Mechanical Stopper by Grid Method

Features

A reference position return for an axis can be made by pushing the axis against the mechanical stopper without using a limit switch or deceleration dog.

As this reference position setting uses a grid method, its precision is on the same level as for a manual reference position return.

Benefits

- Use with Absolute Pulse Encoders to quickly establish a reference point without slow-down switches

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------|
| A02B-0323-S945 | 30i-B Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0326-S945 | 31i-B5 Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0327-S945 | 31i-B Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0328-S945 | 32i-B Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0333-S945 | 35i-B Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0334-S945 | PM i-A Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0339-S945 | 0i-TF Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0340-S945 | 0i-MF Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0349-S945 | 0i-TFP Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0350-S945 | 0i-MFP Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0353-S945 | 30i-BP Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0356-S945 | 31i-B5P Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0357-S945 | 31i-BP Reference Position Setting with Mechanical Stopper by Grid Method |
| A02B-0358-S945 | 32i-BP Reference Position Setting with Mechanical Stopper by Grid Method |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

154

Operation

Manual Handle Feed 1 Unit

Features

The Manual Handle Feed 1-Unit function allows a manual pulse generator to be connected in order to allow the operator to command machine moves by turning the manual handle.

By rotating the manual pulse generator on the machine operator's panel in handle mode, an axis feed corresponding to the amount of rotation can be performed. A desired axis can be selected using the handle axis selection switch.

Connection of the manual pulse generator requires an appropriate I/O device with an Manual Pulse Generator (MPG) connection.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplifies operator intervention
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J835 | 30i-B Manual Handle Feed 1 Unit |
| A02B-0326-J835 | 31i-B5 Manual Handle Feed 1 Unit |
| A02B-0327-J835 | 31i-B Manual Handle Feed 1 Unit |
| A02B-0328-J835 | 32i-B Manual Handle Feed 1 Unit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

155

Operation

Manual Handle Feed 2/3 Units

Features

The Manual Handle Feed 2/3-Units function allows the connection of up to two additional manual pulse generators for the Manual Handle Feed function.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplifies operator intervention
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-J836 | 30i-B Manual Handle Feed 2/3 Units |
| A02B-0326-J836 | 31i-B5 Manual Handle Feed 2/3 Units |
| A02B-0327-J836 | 31i-B Manual Handle Feed 2/3 Units |
| A02B-0328-J836 | 32i-B Manual Handle Feed 2/3 Units |
| A02B-0333-J836 | 35i-B Manual Handle Feed 2/3 Units |
| A02B-0334-J836 | PM i-A Manual Handle Feed 2/3 Units |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

156

Operation

Manual Handle Feed 4/5 Units

Features

The Manual Handle Feed 4/5-Units function allows the connection of up to two additional manual pulse generators for the Manual Handle Feed function.

Benefits

- Simplifies operator intervention
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-S858 | 30i-B Manual Handle Feed 4/5 Units |
| A02B-0326-S858 | 31i-B5 Manual Handle Feed 4/5 Units |
| A02B-0327-S858 | 31i-B Manual Handle Feed 4/5 Units |
| A02B-0328-S858 | 32i-B Manual Handle Feed 4/5 Units |
| A02B-0339-S858 | 0i-TF Manual Handle Feed 4/5 Unit |
| A02B-0340-S858 | 0i-MF Manual Handle Feed 4/5 Unit |
| A02B-0349-S858 | 0i-TFP Manual Handle Feed 4 / 5 Units |
| A02B-0350-S858 | 0i-MFP Manual Handle Feed 4 / 5 Units |
| A02B-0353-S858 | 30i-BP Manual Handle Feed - 4 / 5 Units |
| A02B-0356-S858 | 31i-B5P Manual Handle Feed - 4 / 5 Units |
| A02B-0357-S858 | 31i-BP Manual Handle Feed - 4 / 5 Units |
| A02B-0358-S858 | 32i-BP Manual Handle Feed - 4 / 5 Units |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

157

Operation

Manual Handle Feed - Multiple 10 Million

Features

With the Manual Handle Feed - Multiple 10 Million, machines using small least input increment such as IS-D and IS-E can obtain more amounts of the movement when using manual handle feed.

This function extends the magnification of feed amount on manual handle feed, up to 10 million times of least input increment per pulse.

Benefits

- High-precision coasting movements in manual mode
- Improves precision

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R600 | 30i-B Manual Handle Feed, Multiple 10 Million |
| A02B-0326-R600 | 31i-B5 Manual Handle Feed, Multiple 10 Million |
| A02B-0327-R600 | 31i-B Manual Handle Feed, Multiple 10 Million |
| A02B-0328-R600 | 32i-B Manual Handle Feed, Multiple 10 Million |
| A02B-0353-R600 | 30i-BP Manual Handle Feed Multiple 10 Million |
| A02B-0356-R600 | 31i-B5P Manual Handle Feed Multiple 10 Million |
| A02B-0357-R600 | 31i-BP Manual Handle Feed Multiple 10 Million |
| A02B-0358-R600 | 32i-BP Manual Handle Feed Multiple 10 Million |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

158

Operation

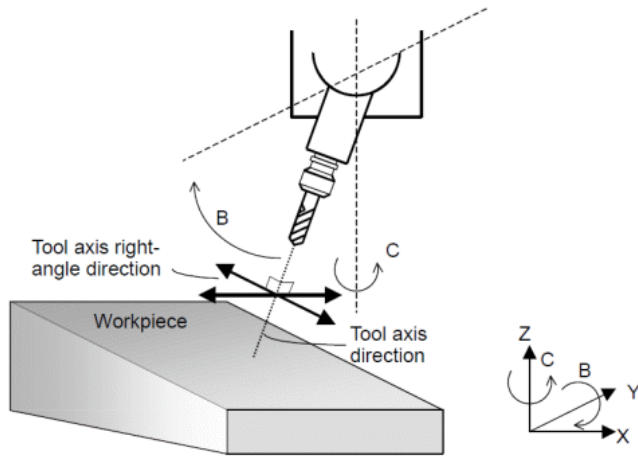

3-Dimensional Manual Feed

Features

The function 3-Dimensional Manual Feed (previously Manual Handle Feed for 5-Axis Machining), allows the machine operator to retract the tool along its machining direction when pressing a button and even move the tool in parallel to the tilted working plane.

On a 3-axis machining process, it is relatively easy to move the Z-axis only to free the tool; on a 5-axis machining process, a smart solution such as the 3D Manual Feed function greatly helps the machine operator.

Benefits

- Manual intervention options in the event of emergencies, for example, after a tool break
- Simplifies operation of 5-axis machine manual movements relative to the machining plane or tool direction vector
- Perform setup and adjustments of part location on machines with rotary axes that tilt the workpiece or rotate the tooling axis vector
- Safely remove the tool from a part when operating in 5-axis mode
- Broken tool recovery
- Manually move a tool normal to the feature coordinate system
- Ability to retract a tool on a vector
- Consolidated package of 5-axis features related to Manual Handle Feed usage

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-S679 | 30i-B 3-Dimensional Manual Feed |
| A02B-0326-S679 | 31i-B5 3-Dimensional Manual Feed |
| A02B-0327-S679 | 31i-B 3-Dimensional Manual Feed |
| A02B-0328-S679 | 32i-B 3-Dimensional Manual Feed |
| A02B-0340-S679 | 0i-MF 3-Dimensional Manual Feed |
| A02B-0350-S679 | 0i-MFP 3-Dimensional Manual Feed |
| A02B-0353-S679 | 30i-BP 3-Dimensional Manual Feed (5-Axis Machine) |
| A02B-0356-S679 | 31i-B5P 3-Dimensional Manual Feed (5-Axis Machine) |
| A02B-0357-S679 | 31i-BP 3-Dimensional Manual Feed (5-Axis Machine) |
| A02B-0358-S679 | 32i-BP 3-Dimensional Manual Feed (5-Axis Machine) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

159

Operation

Handle Interruption

Features

With the Handle Interrupt function, it is possible with a handwheel to move any axis while cycle start is active.

When doing so, the handwheel movement is added to any programmed axis motion.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Allows the operator to adjust the axis position in automatic mode, without changing the part program
- Easy control of depth of cuts by operator using hand wheel
- Reduces set up
- Allows improvement by simple testing

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-J837 | 30i-B Handle Interruption |
| A02B-0326-J837 | 31i-B5 Handle Interruption |
| A02B-0327-J837 | 31i-B Handle Interruption |
| A02B-0328-J837 | 32i-B Handle Interruption |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

160

Operation

Manual Interruption of 3-D Coordinate System Conversion

Features


By this function, it is possible to use a handwheel to move axes in automatic operation mode if the 3-dimensional coordinate conversion function is active. The handwheel motion is added to the programmed axes motion. The handwheel motion is performed in the direction of the selected axis in the rotated coordinate system.

Benefits

- Allows the operator to adjust the axes positions in automatic mode without changing the program
- Reduces set-up time

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------|
| A02B-0323-S949 | 30i-B Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0326-S949 | 31i-B5 Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0327-S949 | 31i-B Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0328-S949 | 32i-B Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0339-S949 | 0i-TF Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0340-S949 | 0i-MF Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0349-S949 | 0i-TFP Manual Interruption of 3-Dimensional Coordinate System Conversion |
| A02B-0350-S949 | 0i-MFP Manual Interruption of 3-Dimensional Coordinate System Conversion |
| A02B-0353-S949 | 30i-BP Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0356-S949 | 31i-B5P Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0357-S949 | 31i-BP Manual Interruption of 3-D Coordinate System Conversion |
| A02B-0358-S949 | 32i-BP Manual Interruption of 3-D Coordinate System Conversion |

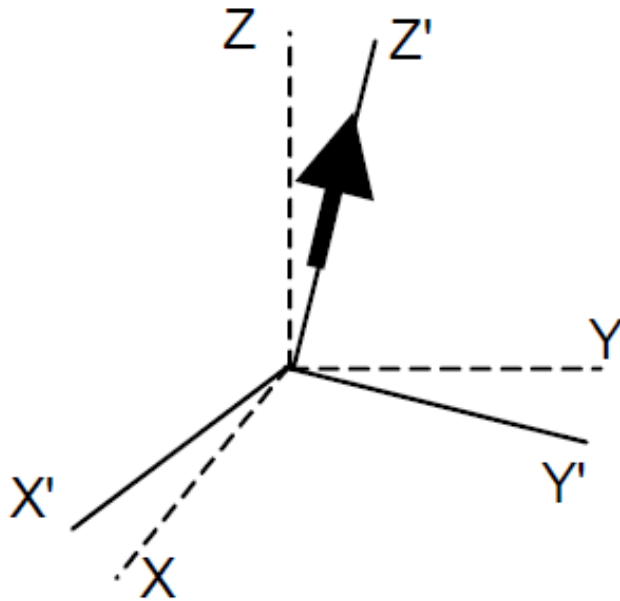

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

161

Operation

Manual Handle Interface for BETA i Series with I/O-Link

Features

The Manual Handle Interface for BETA i series amplifier function controls manual handle feed for BETA i servo amplifiers connected through I/O Link to the CNC with a manual pulse generator connected on the CNC directly (instead of on the amplifier).

Pulses from manual pulse generator are transferred from the CNC side to the BETA i servo amplifier through the I/O network. Furthermore, this function can control the magnification of pulses by changing the parameter.

Note

Power Mate CNC manager (-J674) is required.

Benefits

- Simplifies manual operator intervention
- Reduce wiring for remote servo amplifiers
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------|
| A02B-0323-S722 | 30i-B BETA I/O LINK Manual Handle Interface (Peripheral Control) |
| A02B-0326-S722 | 31i-B5 BETA I/O LINK Manual Handle Interface (Peripheral Control) |
| A02B-0327-S722 | 31i-B BETA I/O LINK Manual Handle Interface (Peripheral Control) |
| A02B-0328-S722 | 32i-B BETA I/O LINK Manual Handle Interface (Peripheral Control) |
| A02B-0333-S722 | 35i-B BETA I/O LINK Manual Handle Interface (Peripheral Control) |
| A02B-0334-S722 | PM i-A BETA I/O LINK Manual Handle Interface (Peripheral Control) |
| A02B-0339-S722 | 0i-TF Manual Handle Interface with I/O LINK BETA Servo |
| A02B-0340-S722 | 0i-MF Manual Handle Interface with I/O LINK BETA Servo |
| A02B-0349-S722 | 0i-TFP Manual Handle Interface with I/O-Link BETA Series Servo Motors |
| A02B-0350-S722 | 0i-MFP Manual Handle Interface with I/O-Link BETA Series Servo Motors |
| A02B-0353-S722 | 30i-BP Manual Handle Interface with I/O-LINK BETA Servo |
| A02B-0356-S722 | 31i-B5P Manual Handle Interface with I/O-LINK BETA Servo |
| A02B-0357-S722 | 31i-BP Manual Handle Interface with I/O-LINK BETA Servo |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

162

| Specification | Description |
|----------------|---------------------------------------------------------|
| A02B-0358-S722 | 32i-BP Manual Handle Interface with I/O-LINK BETA Servo |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

163

Operation

Manual Numerical Command

Features

The Manual Numerical Command function allows the operator to execute data programmed through the MDI in jog mode. Whenever the system is ready for jog feed, a manual numerical command can be executed.

The following eight functions are supported:

1. Positioning (G00)
2. Linear interpolation (G01)
3. Automatic reference position return (G28)
4. 2nd/3rd/4th reference position return (G30)
5. M codes (miscellaneous functions)
6. S codes (spindle speed functions)
7. T codes (tool functions)
8. B codes (second auxiliary functions)

Benefits

- Simplifies operator intervention
- Simplifies programming
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J667 | 30i-B Manual Numerical Command |
| A02B-0326-J667 | 31i-B5 Manual Numerical Command |
| A02B-0327-J667 | 31i-B Manual Numerical Command |
| A02B-0328-J667 | 32i-B Manual Numerical Command |
| A02B-0339-J667 | 0i-TF Manual Numerical Command |
| A02B-0340-J667 | 0i-MF Manual Numerical Command |
| A02B-0349-J667 | 0i-TFP Manual Numerical Command |
| A02B-0350-J667 | 0i-MFP Manual Numerical Command |
| A02B-0353-J667 | 30i-BP Manual Numerical Command |
| A02B-0356-J667 | 31i-B5P Manual Numerical Command |
| A02B-0357-J667 | 31i-BP Manual Numerical Command |
| A02B-0358-J667 | 32i-BP Manual Numerical Command |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

164

Operation

Reference Position Signal Output

Features

The Reference Position Signal Output function provides the capability for the CNC to output a signal to the PMC after the establishment of the reference position on each axis and when the coordinates in the machine coordinate system match the reference position.

In addition, if the coordinates in the machine coordinate system matches a second reference position, the function outputs an additional signal to the PMC.

Benefits

- Simplifies operator intervention
- Simplifies programming
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-S629 | 30i-B Reference position signal output |
| A02B-0326-S629 | 31i-B5 Reference Position Signal Output |
| A02B-0327-S629 | 31i-B Reference Position Signal Output |
| A02B-0328-S629 | 32i-B Reference Position Signal Output |
| A02B-0339-S629 | 0i-TF Reference Position Signal Output |
| A02B-0340-S629 | 0i-MF Reference Position Signal Output |
| A02B-0349-S629 | 0i-TFP Reference Position Signal Output |
| A02B-0350-S629 | 0i-MFP Reference Position Signal Output |
| A02B-0353-S629 | 30i-BP Reference Position Signal Outout |
| A02B-0356-S629 | 31i-B5P Reference Position Signal Outout |
| A02B-0357-S629 | 31i-BP Reference Position Signal Outout |
| A02B-0358-S629 | 32i-BP Reference Position Signal Outout |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

165

Operation

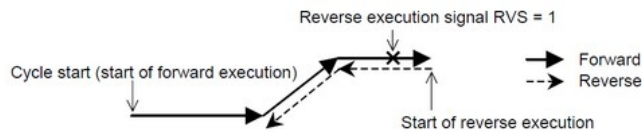

Retrace

Features

The Retrace Function is available for milling operations only. It provides a comfortable way for the operator to move the tool in the reverse direction, during automatic operation, using the REVERSE switch.

This causes the CNC to retrace (i.e. reverse) the programmed path. The tool may subsequently be moved forward again, along the programmed path, to resume cutting.

Benefits

- Convenient mechanism for backing the tool up from the current position, should the need arise, then returning to that position and resuming cutting.

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0323-J730 | 30i-B Retrace Function |
| A02B-0326-J730 | 31i-B5 Retrace Function |
| A02B-0327-J730 | 31i-B Retrace Function |
| A02B-0328-J730 | 32i-B Retrace Function |
| A02B-0340-J730 | 0i-MF Retrace Function |
| A02B-0350-J730 | 0i-MFP Retrace Function |
| A02B-0353-J730 | 30i-BP Retrace Function |
| A02B-0356-J730 | 31i-B5P Retrace Function |
| A02B-0357-J730 | 31i-BP Retrace Function |
| A02B-0358-J730 | 32i-BP Retrace Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

166

Operation

Manual Handle Retrace

Features

The Manual Handle Retrace function allows, during automatic operation, that the operator debugs execution of the part program by simple and intuitive manipulation of the Manual Pulse Generator (MPG).

Using forward and reverse directions, the operator can isolate the problem area and observe the tool path; it can be done at a speed appropriate for accurate observation.

This function is a basic function in FANUC Series 0i-MF Plus.

Benefits

- Operating the machine via the MPG allows the operator to check for errors in the part program.
- The operator controls the speed of program execution via simple and intuitive manipulation of the MPG hand-wheel and multiplier switch, and controls direction of execution via the MPG polarity switch. This allows for close observation of the path at a suitable speed.
- Manual Handle Retrace may be used to isolate and check out a specific portion of the part program: it is not required that the entire program be subjected to Manual Handle Retrace operation.
- Manual Handle Retrace allows the operator to halt execution close to a problem spot in his program. It is not necessary to stop at a precise block, since forward and reverse execution is available to zone in on the problem.

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-J998 | 30i-B Manual Handle Retrace |
| A02B-0326-J998 | 31i-B5 Manual Handle Retrace |
| A02B-0327-J998 | 31i-B Manual Handle Retrace |
| A02B-0328-J998 | 32i-B Manual Handle Retrace |
| A02B-0339-J998 | 0i-TF Manual Handle Retrace |
| A02B-0340-J998 | 0i-MF Manual Handle Retrace |
| A02B-0349-J998 | 0i-TFP Manual Handle Retrace |
| A02B-0353-J998 | 30i-BP Manual Handle Retrace |
| A02B-0356-J998 | 31i-B5P Manual Handle Retrace |
| A02B-0357-J998 | 31i-BP Manual Handle Retrace |
| A02B-0358-J998 | 32i-BP Manual Handle Retrace |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

167

Operation

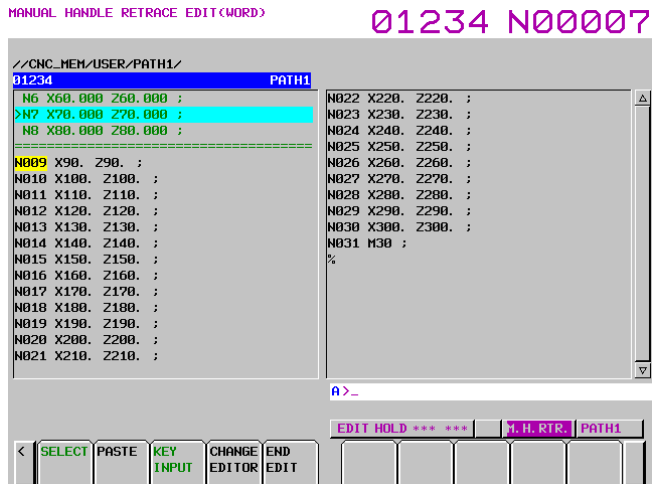

Editing for Manual Handle Retrace

Features

An operator can debug part programs during automatic operation with the Manual Handle Retrace function by using the Manual Pulse Generator. Editing for Manual Handle Retrace is an extension which allows the operator to correct found mistakes in the program easily during Manual Handle Retrace.

Benefits

- Correct found mistakes easily during Manual Handle Retrace

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-R409 | 30i-B Editing for Manual Handle Retrace |
| A02B-0326-R409 | 31i-B5 Editing for Manual Handle Retrace |
| A02B-0327-R409 | 31i-B Editing for Manual Handle Retrace |
| A02B-0328-R409 | 32i-B Editing for Manual Handle Retrace |
| A02B-0339-R409 | 0i-TF Editing for Manual Handle Retrace |
| A02B-0340-R409 | 0i-MF Editing for Manual Handle Retrace |
| A02B-0349-R409 | 0i-TFP Editing for Manual Handle Retrace |
| A02B-0350-R409 | 0i-MFP Editing for Manual Handle Retrace |
| A02B-0353-R409 | 30i-BP Editing for Manual Handle Retrace |
| A02B-0356-R409 | 31i-B5P Editing for Manual Handle Retrace |
| A02B-0357-R409 | 31i-BP Editing for Manual Handle Retrace |
| A02B-0358-R409 | 32i-BP Editing for Manual Handle Retrace |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

168

Operation

Manual Handle Retrace for Multi-Path

Features

In the Manual Handle Retrace for Multi-Path function, when the operation of re-forward movement is performed after backward movement, it is possible to adjust the timing of all path's movement to that of original forward movement.

In manual handle retrace function, when backward movement is prohibited to in a path, and other paths continue the backward movement, if re-forward movement is performed later, all paths start the re-forward movement immediately, therefore the timing of block movement in each path is different from original forward movement.

In this function, when re-forward movement is performed after backward movement, the path in which backward movement is prohibited doesn't start re-forward movement immediately. After other paths reach the position where the backward movement is prohibited, the re-forward movement of this path is performed. Therefore, in multi path, block movement of each path in re-forward movement can be performed at the same timing in forward movement.

Benefits

- Provides the Manual Handle Retrace benefits to a complex Multi-Path system
- Operating the machine via the MPG allows the operator to check for errors in the part program.
- The operator controls the speed of program execution via simple and intuitive manipulation of the MPG hand-wheel and multiplier switch, and controls direction of execution via the MPG polarity switch. This allows for close observation of the path at a suitable speed.
- Manual Handle Retrace may be used to isolate and check out a specific portion of the part program: it is not required that the entire program be subjected to Manual Handle Retrace operation.
- Manual Handle Retrace allows the operator to halt execution close to a problem spot in his program. It is not necessary to stop at a precise block, since forward and reverse execution is available to zone in on the problem.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-R606 | 30i-B Manual Handle Retrace Function for Multi-Path CNC |
| A02B-0326-R606 | 31i-B5 Manual Handle Retrace Function for Multi-Path CNC |
| A02B-0327-R606 | 31i-B Manual Handle Retrace Function for Multi-Path CNC |
| A02B-0328-R606 | 32i-B Manual Handle Retrace Function for Multi-Path CNC |
| A02B-0339-R606 | 0i-TF Manual Handle Retrace Function for Multi-Path |
| A02B-0340-R606 | 0i-MF Manual Handle Retrace Function for Multi-Path |
| A02B-0349-R606 | 0i-TFP Manual Handle Retrace Function for Multi-Path |
| A02B-0350-R606 | 0i-MFP Manual Handle Retrace Function for Multi-Path |
| A02B-0353-R606 | 30i-BP Manual Handle Retrace Function for Multi-Path |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0356-R606 | 31i-B5P Manual Handle Retrace Function for Multi-Path |
| A02B-0357-R606 | 31i-BP Manual Handle Retrace Function for Multi-Path |
| A02B-0358-R606 | 32i-BP Manual Handle Retrace Function for Multi-Path |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

170

Operation

Direction Change Movement in Auxiliary Function Output Block Function

Features

With this function and in manual handle retrace mode, when movement command and auxiliary function (M,S,T,B-code) are commanded within the same block, the direction change movement can be evaluated within the PMC and appropriate action can be taken.

Parameter: it is possible to allow or prohibit direction change during manual handle retrace operation while setting the corresponding parameter accordingly.

Signal: in manual handle retrace, when both movement command and auxiliary function (M,S,T,B-code) are commanded in a block at a time, a signal notifies direction change of movement performed by the manual handle.

Benefits

- Simplifies operator work and effectivity in manual / handle mode
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------|
| A02B-0323-S628 | 30i-B Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0326-S628 | 31i-B5 Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0327-S628 | 31i-B Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0328-S628 | 32i-B Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0339-S628 | 0i-TF Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0340-S628 | 0i-MF Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0349-S628 | 0i-TFP Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0350-S628 | 0i-MFP Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0353-S628 | 30i-BP Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0356-S628 | 31i-B5P Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0357-S628 | 31i-BP Direction Change Movement in Auxiliary Function Output Block Function |
| A02B-0358-S628 | 32i-BP Direction Change Movement in Auxiliary Function Output Block Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

171

Operation

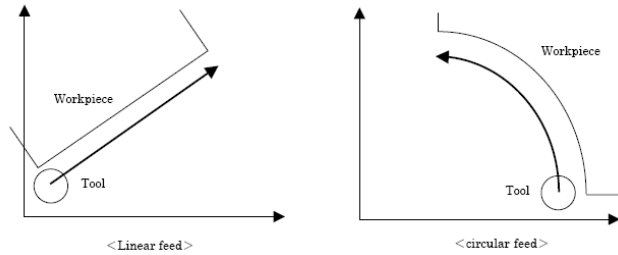

Manual Linear/Circular Interpolation

Features

In manual handle feed or jog feed, the following types of feed operations are enabled along with conventional single axis feed operation:

- Feed along a tilted straight line in the XY plane or YZ plane or ZX plane based on simultaneous 2-axis control (linear feed)
- Feed along a circle in the XY plane or YZ plane or ZX plane based on simultaneous 2-axis control (circular feed)

Note: when using the Manual Linear / Circular Interpolation function, the option 'Manual handle feed 1-unit' is required. When using 2nd or 3rd Manual handle, the option 'Manual handle feed 2/3-unit' or 'Manual handle feed 4/5-unit' is required. When using 4th or 5th Manual handle, the option 'Manual handle feed 4/5-unit' is required.

Benefits

- Simplifies operator work and effectivity in manual / handle mode
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-J774 | 30i-B Manual Linear / Circular Interpolation |
| A02B-0326-J774 | 31i-B5 Manual Linear / Circular Interpolation |
| A02B-0327-J774 | 31i-B Manual Linear / Circular Interpolation |
| A02B-0328-J774 | 32i-B Manual Linear / Circular Interpolation |
| A02B-0339-J774 | 0i-TF Manual Linear / Circular Interpolation |
| A02B-0340-J774 | 0i-MF Manual Linear / Circular Interpolation |
| A02B-0349-J774 | 0i-TFP Manual Linear / Circular Interpolation |
| A02B-0350-J774 | 0i-MFP Manual Linear / Circular Interpolation |
| A02B-0353-J774 | 30i-BP Manual Linear / Circular Interpolation |
| A02B-0356-J774 | 31i-B5P Manual Linear / Circular Interpolation |
| A02B-0357-J774 | 31i-BP Manual Linear / Circular Interpolation |
| A02B-0358-J774 | 32i-BP Manual Linear / Circular Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

172

Operation

Reverse Motion Function for Restart

Features

The machining can be restarted very easily by using this function after the machining stopped due to a reset, an emergency stop or a power failure.

The function consists of the following three features:

- When machining stops because of an interruption and the tool runs off the machining path, the function enables the tool to go back to the point on the machining path where the machining was interrupted.
- After the tool has returned to the interruption point, the CNC calls the interrupted program, searches for the interrupted block and holds there.
- After the recovery, maximum 100 blocks of the machining process can be reversed along the programming path, in order to retract the tool safely from the workpiece.

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-R529 | 30i-B Reverse Motion Function for Restart |
| A02B-0326-R529 | 31i-B5 Reverse Motion Function for Restart |
| A02B-0327-R529 | 31i-B Reverse Motion Function for Restart |
| A02B-0328-R529 | 32i-B Reverse Motion Function for Restart |
| A02B-0353-R529 | 30i-BP Reverse MotionFunction for Restart |
| A02B-0356-R529 | 31i-B5P Reverse MotionFunction for Restart |
| A02B-0357-R529 | 31i-BP Reverse MotionFunction for Restart |
| A02B-0358-R529 | 32i-BP Reverse MotionFunction for Restart |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

173

Operation

Active Block Cancel

Features

The Active Block Cancel function is used to cancel the executing block by a signal from the PMC, and to stop.

The distance remaining is cleared, and the execution is restarted from the next block of canceled block by cycle start.

Benefits

- Possibility to check the part program for a short time.
- Simplifies operator work
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-S627 | 30i-B Active Block Cancel |
| A02B-0326-S627 | 31i-B5 Active Block Cancel |
| A02B-0327-S627 | 31i-B Active Block Cancel |
| A02B-0328-S627 | 32i-B Active Block Cancel |
| A02B-0339-S627 | 0i-TF Active Block Cancel |
| A02B-0340-S627 | 0i-MF Active Block Cancel |
| A02B-0349-S627 | 0i-TFP Active Block Cancel |
| A02B-0350-S627 | 0i-MFP Active Block Cancel |
| A02B-0353-S627 | 30i-BP Active Block Cancel |
| A02B-0356-S627 | 31i-B5P Active Block Cancel |
| A02B-0357-S627 | 31i-BP Active Block Cancel |
| A02B-0358-S627 | 32i-BP Active Block Cancel |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

174

Operation

High-Speed Program Check

Features

The High Speed Program Check function provides the following features:

- The program format check and the stroke limit check are available without axes movements.
- The program check is executed with the maximum feedrate of CNC system and without the acceleration / deceleration regardless of the specified data.
- After the program check is completed, the reference position return is not necessary because the workpiece coordinate system preset is executed automatically at the end of the high speed program check mode.
- In case that the parameter PGR [No.3454#3] is set to "1", the data, which are changed during the high speed program check mode, are restored to the data at the start of the high speed program check mode when ending the high speed program check mode. By this, after ending the high speed program check mode, the automatic operation can be executed with the data before the start of the high speed program check mode.

Benefits

- Possibility to accelerate the check of the programs
- Time saving

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-S880 | 30i-B High-Speed Program Check Function |
| A02B-0326-S880 | 31i-B5 High-Speed Program Check Function |
| A02B-0327-S880 | 31i-B High-Speed Program Check Function |
| A02B-0328-S880 | 32i-B High-Speed Program Check Function |
| A02B-0339-S880 | 0i-TF High-Speed Program Check |
| A02B-0340-S880 | 0i-MF High-Speed Program Check |
| A02B-0349-S880 | 0i-TFP High-Speed Program Check |
| A02B-0350-S880 | 0i-MFP High-Speed Program Check |
| A02B-0353-S880 | 30i-BP High-Speed Program Check |
| A02B-0356-S880 | 31i-B5P High-Speed Program Check |
| A02B-0357-S880 | 31i-BP High-Speed Program Check |
| A02B-0358-S880 | 32i-BP High-Speed Program Check |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

175

Operation

Dwell / Auxiliary Function Time Override Function

Features

The Time Override Function for Dwell/Auxiliary Function applies override to the dwell and auxiliary (M/S/T/B) function in the range of 0% to 100% in steps of 1%.

If the override is applied to auxiliary (M/S/T/B) function, the next block is executed after a shortage of time. The actual processing time is considered to be 100%, and the shortage is calculated from the time.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------|
| A02B-0323-R500 | 30i-B Dwell / Auxiliary Function Time Override Function |
| A02B-0326-R500 | 31i-B5 Dwell / Auxiliary Function Time Override Function |
| A02B-0327-R500 | 31i-B Dwell / Auxiliary Function Time Override Function |
| A02B-0328-R500 | 32i-B Dwell / Auxiliary Function Time Override Function |
| A02B-0339-R500 | 0i-TF Dwell / Auxiliary Function Time Override |
| A02B-0340-R500 | 0i-MF Dwell / Auxiliary Function Time Override |
| A02B-0349-R500 | 0i-TFP Dwell / Auxiliary Function Time Override Function |
| A02B-0350-R500 | 0i-MFP Dwell / Auxiliary Function Time Override Function |
| A02B-0353-R500 | 30i-BP Dwell / Auxiliary Function Time Override Function |
| A02B-0356-R500 | 31i-B5P Dwell / Auxiliary Function Time Override Function |
| A02B-0357-R500 | 31i-BP Dwell / Auxiliary Function Time Override Function |
| A02B-0358-R500 | 32i-BP Dwell / Auxiliary Function Time Override Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

176

Operation

Pulse Superimposed Function

Features

The Pulse Superimposed Function enables pulse superimposed control in cutting mode that have been specified by the PMC in automatic operation mode (MDI operation, DNC operation, and memory operation) and in memory edit mode.

The maximum number of superimposed axes at the same time is two on each path (twice the number of paths in the entire system).

This function requires the following option:

- Manual handle interrupt
- Manual handle feed, 1 unit
- Manual handle feed, 2/3-units
- (or manual handle feed, 4/5-units)

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-R559 | 30i-B Pulse Superimposed Function |
| A02B-0326-R559 | 31i-B5 Pulse Superimposed Function |
| A02B-0327-R559 | 31i-B Pulse Superimposed Function |
| A02B-0328-R559 | 32i-B Pulse Superimposed Function |
| A02B-0353-R559 | 30i-BP Pulse Superimposed Function |
| A02B-0356-R559 | 31i-B5P Pulse Superimposed Function |
| A02B-0357-R559 | 31i-BP Pulse Superimposed Function |
| A02B-0358-R559 | 32i-BP Pulse Superimposed Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

177

Operation

NC Program Conversion Function

Features

The cutting cycle made with TURN MATE i can be converted into standard ISO programs and output to the CNC program memory.

The following functionality is available:

- Selected cutting cycle can be converted into a standard ISO CNC program on the Base screen.
- Selected program can be batched-converted into CNC programs on a Process List screen.

Benefits

- Simplifies the programming of the machine
- Simple conversion of programs generated with conversational tool to ISO code
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0339-S795 | 0i-TF TURN MATE i - NC Program Conversion Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

178

Functions

Interpolation Functions

This section of the catalogue contains the functions related to the interpolation capabilities and functions of the CNC system.

Interpolation functions control how the CNC will move the axes. Simple positioning, linear and circular interpolation are standard features of the controllers. Other forms of interpolation are optional and depend on the purpose of the machine tool. They can ease drastically the programming of complex geometric shapes, as well as optimize the part programs size and improve the accuracy of the machine.

Some of the interpolation functions detailed in the catalogue:

- Exponential Interpolation
- Polar Coordinate Interpolation
- Cylindrical Interpolation
- Helical Interpolation
- Involute Interpolation
- Hypothetical Axes Interpolation
- Conical/Spiral Interpolation
- Smooth Interpolation
- Nano Smoothing
- Thread cutting, synchronous cutting, complex threading
- NURBS Interpolation
- 3 Dimensional Circular Interpolation
- High-speed cutting
- Path Table Operation
- High-speed binary program operation
- Etc.


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

179

Interpolation Functions

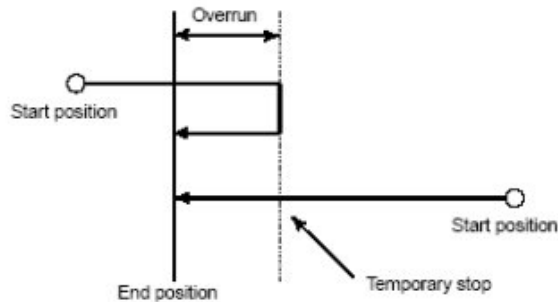

Single Direction Positioning

Features

When using the Single Direction Positioning function, the CNC automatically approaches specific locations always from the same direction.

Accurate positioning without backlash can be performed and final positioning from one direction is possible as well.

This function is a basic function in FANUC Series 0i-MF and 0i-MF Plus.

Benefits

- Minimize backlash error by using unidirectional positioning
- Improves accuracy in bolt hole patterns with minimized backlash error

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-J812 | 30i-B Single Direction Positioning |
| A02B-0326-J812 | 31i-B5 Single Direction Positioning |
| A02B-0327-J812 | 31i-B Single Direction Positioning |
| A02B-0328-J812 | 32i-B Single Direction Positioning |
| A02B-0333-J812 | 35i-B Single Direction Positioning |
| A02B-0353-J812 | 30i-BP Single Direction Positioning |
| A02B-0356-J812 | 31i-B5P Single Direction Positioning |
| A02B-0357-J812 | 31i-BP Single Direction Positioning |
| A02B-0358-J812 | 32i-BP Single Direction Positioning |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

180

Interpolation Functions

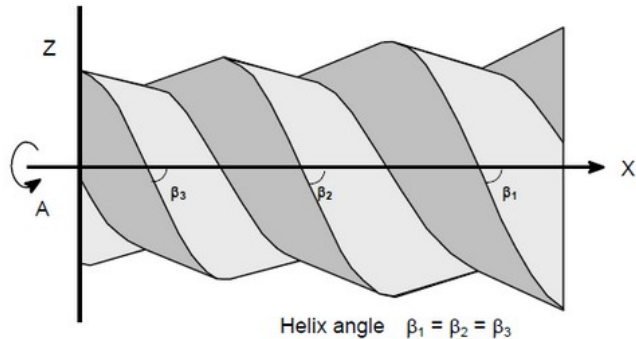

Exponential Interpolation

Features

The Exponential Interpolation function is used to coordinate linear and rotary axis movement.

Exponential interpolation exponentially changes the rotation of a workpiece with respect to movement on the rotary axis. Furthermore, exponential interpolation performs linear interpolation with respect to another axis.

This enables tapered groove machining with a constant helix angle (constant helix taper machining). This function is best suited for grooving and grinding tools such as taper end mills.

Benefits

- Adds special interpolation type to the CNC
- Provides interpolation specialized for grooving and grinding tools
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J711 | 30i-B Exponential Interpolation |
| A02B-0326-J711 | 31i-B5 Exponential Interpolation |
| A02B-0327-J711 | 31i-B Exponential Interpolation |
| A02B-0328-J711 | 32i-B Exponential Interpolation |
| A02B-0353-J711 | 30i-BP Exponential Interpolation |
| A02B-0356-J711 | 31i-B5P Exponential Interpolation |
| A02B-0357-J711 | 31i-BP Exponential Interpolation |
| A02B-0358-J711 | 32i-BP Exponential Interpolation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

181

Interpolation Functions

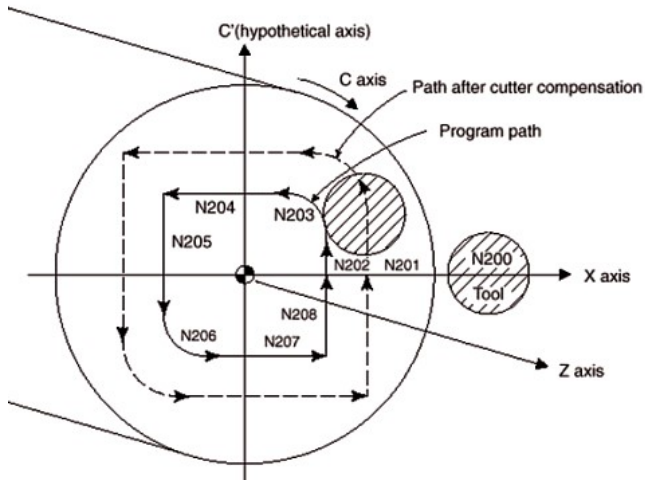

Polar Coordinate Interpolation

Features

The Polar Coordinate Interpolation function allows a designated pair of axes (one rotary and one linear) to be programmed like two linear axes.

The function converts a command programmed in the Cartesian coordinate system to the movement of a linear axis (movement of a tool) and the movement of a rotary axis (rotation of a workpiece).

Examples of use include cutting grooves in face side of rotary workpiece and grinding a camshaft.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Simplifies programming when a linear movement and a rotational movement have to be coordinated.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J815 | 30i-B Polar Coordinate Interpolation |
| A02B-0326-J815 | 31i-B5 Polar Coordinate Interpolation |
| A02B-0327-J815 | 31i-B Polar Coordinate Interpolation |
| A02B-0328-J815 | 32i-B Polar Coordinate Interpolation |
| A02B-0333-J815 | 35i-B Polar Coordinate Interpolation |
| A02B-0334-J815 | PM i-A Polar Coordinate Interpolation |
| A02B-0353-J815 | 30i-BP Polar Coordinate Interpolation |
| A02B-0356-J815 | 31i-B5P Polar Coordinate Interpolation |
| A02B-0357-J815 | 31i-BP Polar Coordinate Interpolation |
| A02B-0358-J815 | 32i-BP Polar Coordinate Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.



The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

182

Interpolation Functions

Example of a cylindrical interpolation programs

```
O0001 (CYLINDRICAL INTERPOLATION);  
N01 G00 G90 Z100.0 C0 ;  
N02 G01 G91 G18 Z0 C0 ;  
N03 G07.1 C57.299 ;  
N04 G90 G01 G42 Z120.0 D01 F250 ;  
N05 C30.0 ;  
N06 G03 Z90.0 C60.0 R30.0 ;  
N07 G01 Z70.0 ;  
N08 G02 Z60.0 C70.0 R10.0 ;  
N09 G01 C150.0 ;  
N10 G02 Z70.0 C190.0 R75.0 ;  
N11 G01 Z110.0 C230.0 ;  
N12 G03 Z120.0 C270.0 R75.0 ;  
N13 G01 C360.0 ;  
N14 G40 Z100.0 ;  
N15 G07.1 C0 ;  
N16 M30 ;  
(Note) Sample program where the C axis is parallel to the X-axis.
```

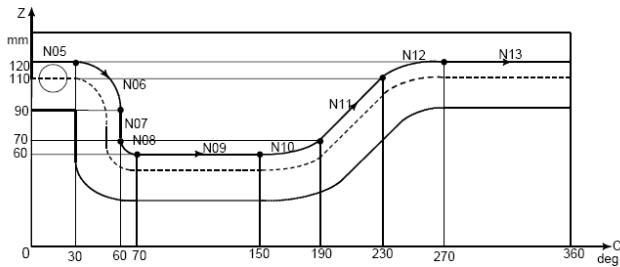

Cylindrical Interpolation

Features

The Cylindrical Interpolation function allows the programmer to program a shape on the surface of a cylinder, using linear and circular interpolation commands.

The programmer can visualize the surface of the cylinder being worked as if it had been rolled out on a flat plane.

This function is a basic function in FANUC Series 0i-MF (Type 1), 0i-TF (all Types), 0i-MF Plus (Type 0, Type 1) and 0i-TF/LF Plus (all Types).

Benefits

- Simplifies programming for machining the curved surface of a cylinder.
- Programs such as those for grooving cylindrical cams can be easily created.

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J816 | 30i-B Cylindrical Interpolation |
| A02B-0326-J816 | 31i-B5 Cylindrical Interpolation |
| A02B-0327-J816 | 31i-B Cylindrical Interpolation |
| A02B-0328-J816 | 32i-B Cylindrical Interpolation |
| A02B-0350-J816 | 0i-MFP Cylindrical Interpolation |
| A02B-0353-J816 | 30i-BP Cylindrical Interpolation |
| A02B-0356-J816 | 31i-B5P Cylindrical Interpolation |
| A02B-0357-J816 | 31i-BP Cylindrical Interpolation |
| A02B-0358-J816 | 32i-BP Cylindrical Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

183

Interpolation Functions

Cylindrical Interpolation by Plane Distance Command

Features

Normally, a program command for the rotary axis in the cylindrical interpolation was given by rotary angle of the rotary axis.

The Cylindrical Interpolation by Plane Distance Command function enables a command for the rotary axis in the cylindrical interpolation by the cylindrical plane distance according to a parameter setting.

Benefits

- Provide an additional method of programming the cylindrical interpolation
- Increases the programming flexibility

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-R578 | 30i-B Cylindrical Interpolation by Plane Distance Command |
| A02B-0326-R578 | 31i-B5 Cylindrical Interpolation by Plane Distance Command |
| A02B-0327-R578 | 31i-B Cylindrical Interpolation by Plane Distance Command |
| A02B-0328-R578 | 32i-B Cylindrical Interpolation by Plane Distance Command |
| A02B-0339-R578 | 0i-TF Cylindrical Interpolation by Plane Distance Command |
| A02B-0340-R578 | 0i-MF Cylindrical Interpolation by Plane Distance Command |
| A02B-0349-R578 | 0i-TFP Cylindrical Interpolation by Plane Distance Command |
| A02B-0350-R578 | 0i-MFP Cylindrical Interpolation by Plane Distance Command |
| A02B-0353-R578 | 30i-BP Cylindrical Interpolation by Plane Distance Command |
| A02B-0356-R578 | 31i-B5P Cylindrical Interpolation by Plane Distance Command |
| A02B-0357-R578 | 31i-BP Cylindrical Interpolation by Plane Distance Command |
| A02B-0358-R578 | 32i-BP Cylindrical Interpolation by Plane Distance Command |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

184

Interpolation Functions

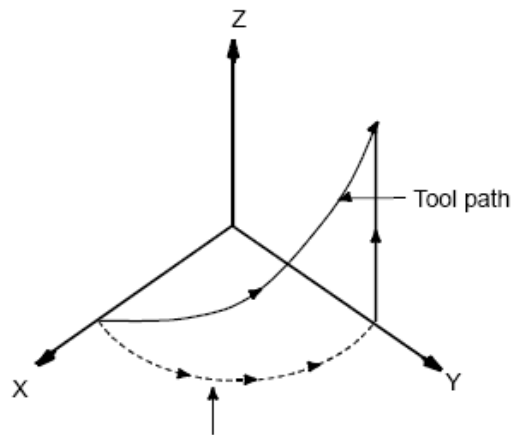

The feedrate along the circumference of two circular interpolated axes is the specified feedrate.

Helical Interpolation

Features

Helical Interpolation permits the programmer to command a move in which up to two axes are moved in a linear fashion at the same time as the basic two axes that are performing circular interpolation. This results in a helical cut.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF (all Types), 0i-PF and 0i-MF/LF Plus (all Types).

Benefits

- Provides a simple way to program helical cuts
- Increases the programming flexibility of the CNC

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J819 | 30i-B Helical Interpolation |
| A02B-0326-J819 | 31i-B5 Helical Interpolation |
| A02B-0327-J819 | 31i-B Helical Interpolation |
| A02B-0328-J819 | 32i-B Helical Interpolation |
| A02B-0333-J819 | 35i-B Helical Interpolation |
| A02B-0334-J819 | PM i-A Helical Interpolation |
| A02B-0339-J819 | 0i-TF Helical Interpolation |
| A02B-0349-J819 | 0i-TFP Helical Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

185

Interpolation Functions

Helical Interpolation B

Features

Helical Interpolation B permits the programmer to command a move in which up to four axes are moved in a linear fashion at the same time as the basic two axes that are performing circular interpolation.

Benefits

- Provides additional methods to realize advanced helical cuts
- Increases the programming flexibility of the CNC

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-J655 | 30i-B Helical Interpolation B |
| A02B-0353-J655 | 30i-BP Helical Interpolation B |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

186

Interpolation Functions

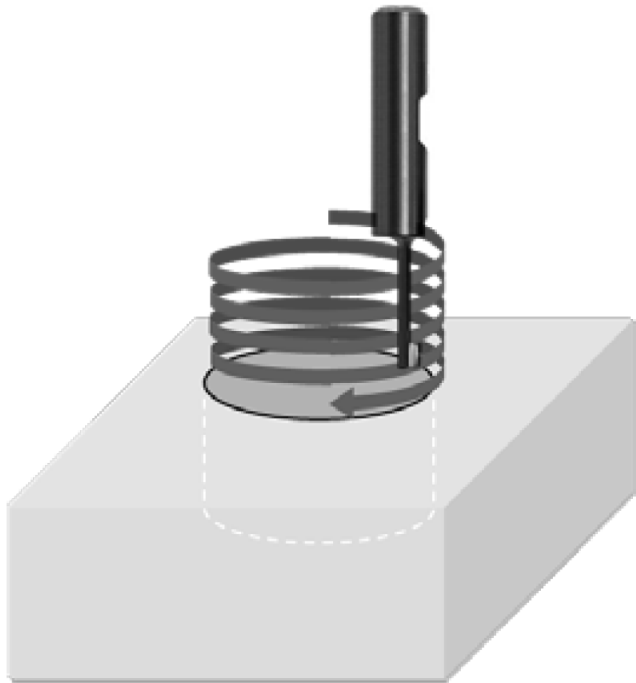

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Learning Helical Interpolation

Features

Learning Helical Interpolation replaces boring machining with milling machining. High-speed and high-precision machining are realized by using Servo Learning Control. Both delays of the servo system and negative effects of periodic disturbance are minimized. Learning Helical Interpolation in combination with Servo Learning Control reduce the quadrant protrusions which occur when milling a hole with a helical motion, leading to higher precision.

Benefits


- Reduce boring tools and minimize the amount of tool changes

Ordering Information


| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-R387 | 30i-B Learning Helical Interpolation |
| A02B-0326-R387 | 31i-B5 Learning Helical Interpolation |
| A02B-0327-R387 | 31i-B Learning Helical Interpolation |
| A02B-0328-R387 | 32i-B Learning Helical Interpolation |

187

Interpolation Functions

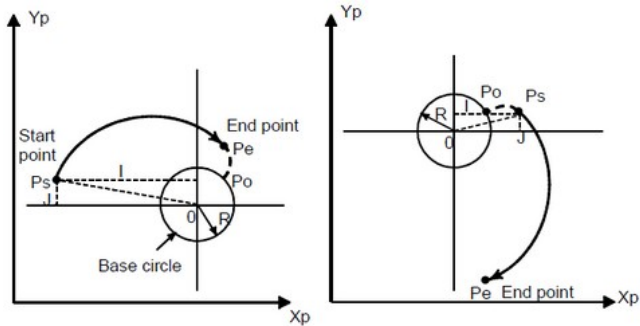

Clockwise involute interpolation (G02.2)

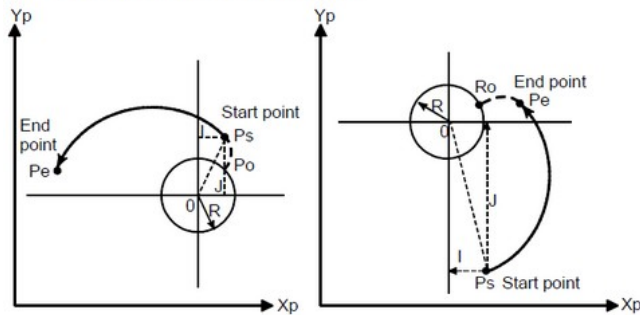

Counterclockwise involute interpolation (G03.2)

Involutes Interpolation

Features

The Involutes Interpolation function performs the machining of complex involute curves. Involute interpolation eliminates the need for approximating an involute curve with minute segments or arcs, and continuous pulse distribution is ensured even in high-speed operation of small blocks.

Accordingly, high-speed operation can be performed smoothly. Furthermore, machining programs can be created easily and efficiently, reducing the required length of program. Involutes interpolation is useful for tool grinding.

The Helical Involute Interpolation function performs on two axes involute interpolation and on up to four other axes linear interpolation simultaneously.

When using only "Helical Involute Interpolation (S853)", this function performs two axes involute interpolation and up to two other axes linear interpolation simultaneously.

To enable the function to perform two axes involute interpolation and more than three other axes linear interpolation simultaneously, Helical Interpolation B (J655) option is required.

Benefits

- Adds special interpolation type to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-J710 | 30i-B Involute Interpolation |
| A02B-0326-J710 | 31i-B5 Involute Interpolation |
| A02B-0327-J710 | 31i-B Involute Interpolation |
| A02B-0328-J710 | 32i-B Involute Interpolation |
| A02B-0353-J710 | 30i-BP Involute Interpolation |
| A02B-0356-J710 | 31i-B5P Involute Interpolation |
| A02B-0357-J710 | 31i-BP Involute Interpolation |
| A02B-0358-J710 | 32i-BP Involute Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

188

Interpolation Functions

Helical Involute Interpolation

Features

The Helical Involute Interpolation function is similar to Involute Interpolation in that it performs machining of complex involute curves. But in addition to 2 axes involute interpolation, up to 4 other linear axes can be interpolated simultaneously. If 3 or 4 linear axes are interpolated simultaneously, the Helical Interpolation B option is required additionally.

Benefits

- Adds special interpolation type to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-S853 | 30i-B Helical Involute Interpolation |
| A02B-0326-S853 | 31i-B5 Helical Involute Interpolation |
| A02B-0327-S853 | 31i-B Helical Involute Interpolation |
| A02B-0328-S853 | 32i-B Helical Involute Interpolation |
| A02B-0353-S853 | 30i-BP Helical Involute Interpolation |
| A02B-0356-S853 | 31i-B5P Helical Involute Interpolation |
| A02B-0357-S853 | 31i-BP Helical Involute Interpolation |
| A02B-0358-S853 | 32i-BP Helical Involute Interpolation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

189

Interpolation Functions

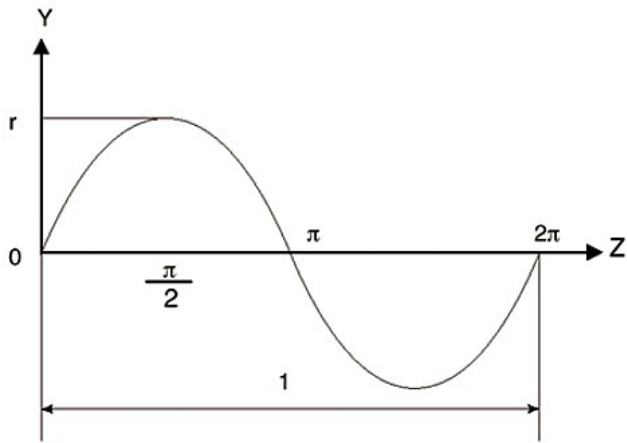

Hypothetical Axes Interpolation

Features

In helical interpolation when one of the circular interpolation axes is defined as a hypothetical axis then the tool path follows a sinusoidal path.

The Hypothetical Interpolation function is used for threading with a fractional lead. The axis to be set as the hypothetical axis is specified with G07.

Benefits

- Adds special interpolation type to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-J652 | 30i-B Hypothetical Axes Interpolation |
| A02B-0326-J652 | 31i-B5 Hypothetical Axes Interpolation |
| A02B-0327-J652 | 31i-B Hypothetical Axes Interpolation |
| A02B-0328-J652 | 32i-B Hypothetical Axes Interpolation |
| A02B-0353-J652 | 30i-BP Hypothetical Axis Interpolation |
| A02B-0356-J652 | 31i-B5P Hypothetical Axis Interpolation |
| A02B-0357-J652 | 31i-BP Hypothetical Axis Interpolation |
| A02B-0358-J652 | 32i-BP Hypothetical Axis Interpolation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

190

Interpolation Functions

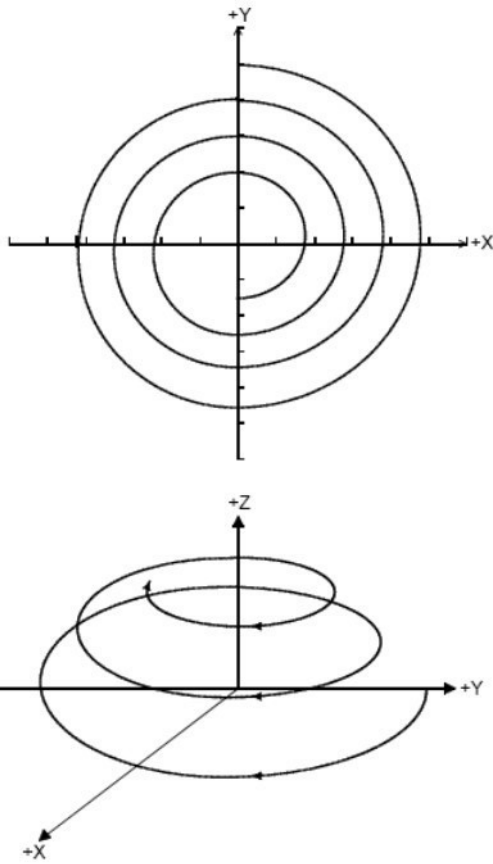

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Conical/Spiral Interpolation

Features

The Conical/Spiral Interpolation function allows the CNC programmer to command, in a single block, a spiral move in a plane (two axes) or a conical move in three dimensions.

Benefits


- Simple command block for spiral interpolation.
- Simple command block for conical interpolation.
- Common command structure for conical/spiral interpolation.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J780 | 30i-B Conical / Spiral Interpolation |
| A02B-0326-J780 | 31i-B5 Conical / Spiral Interpolation |
| A02B-0327-J780 | 31i-B Conical / Spiral Interpolation |
| A02B-0328-J780 | 32i-B Conical / Spiral Interpolation |
| A02B-0353-J780 | 30i-BP Conical / Spiral Interpolation |
| A02B-0356-J780 | 31i-B5P Conical / Spiral Interpolation |
| A02B-0357-J780 | 31i-BP Conical / Spiral Interpolation |
| A02B-0358-J780 | 32i-BP Conical / Spiral Interpolation |

191

Interpolation Functions

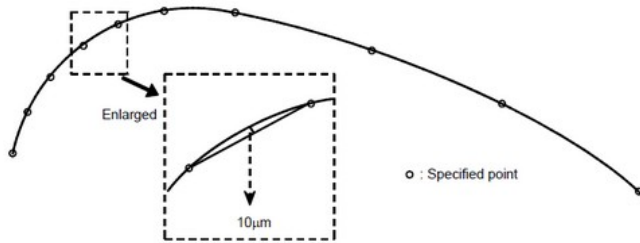

Smooth Interpolation

Features

The Smooth Interpolation function can be used to enhance the surface finish of the part being machined, such as die cutting, where the part program is typically large and consists of many small moves. The CNC automatically determines when to select one of two types of machining:

- For those portions where the accuracy of the figure is critical, such as at corners, machining will be performed exactly as specified by the program command.
- For those portions having a large radius of curvature, where a smooth figure is desired, points along the machining path will be interpolated with a smooth curve, calculated from the polygonal lines specified in successive program commands.

Benefits

- Smooth surface finish, where dwell marks might otherwise have been a problem.
- Simple programming, with the CNC automatically determining when to apply smooth interpolation and when to ignore it.
- High-speed, high-precision machining can be performed.

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J777 | 30i-B Smooth Interpolation |
| A02B-0326-J777 | 31i-B5 Smooth Interpolation |
| A02B-0327-J777 | 31i-B Smooth Interpolation |
| A02B-0353-J777 | 30i-BP Smooth Interpolation |
| A02B-0356-J777 | 31i-B5P Smooth Interpolation |
| A02B-0357-J777 | 31i-BP Smooth Interpolation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

192

Interpolation Functions

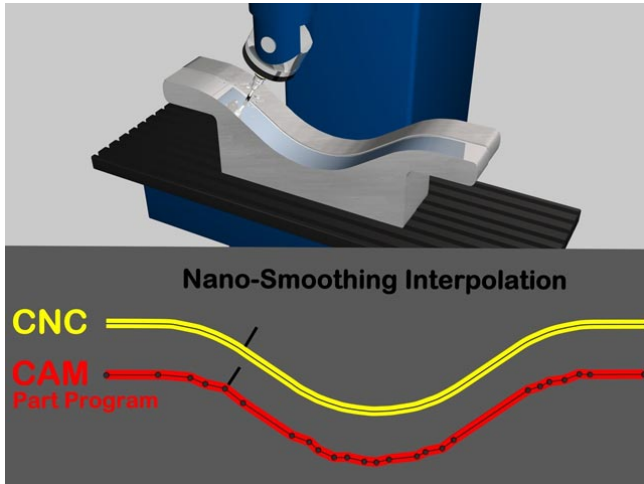

Nano Smoothing

Features

The Nano Smoothing function allows linear segmented programs developed either for 3-axis or 5-axis machines to be automatically converted into continuous free-forms using the CNCs inbuilt NURBS technology. When a desired, sculptured surface is approximated by minute segments, the nano smoothing function generates a smooth curve inferred from the programmed segments and performs the necessary interpolation.

The conventional Nano Smoothing function (S687) is limited to the three basic axes [X, Y, and Z] whereas the Nano Smoothing II function (R512), former Nano Smoothing for 5-Axis Machining, does additionally consider two rotary axes.

Benefits

- Exceptional surface finish, better part quality
- Extremely "Fluid" motion, less tool wear
- Less requirement to process later the cut surface with grinding or polishing
- Significant increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-R512 | 30i-B Nano Smoothing II |
| A02B-0323-S687 | 30i-B Nano Smoothing |
| A02B-0326-R512 | 31i-B5 Nano Smoothing II |
| A02B-0326-S687 | 31i-B5 Nano Smoothing |
| A02B-0327-S687 | 31i-B Nano Smoothing |
| A02B-0328-S687 | 32i-B Nano Smoothing |
| A02B-0340-S687 | 0i-MF Nano Smoothing |
| A02B-0353-S687 | 30i-BP Nano Smoothing |
| A02B-0356-S687 | 31i-B5P Nano Smoothing |
| A02B-0357-S687 | 31i-BP Nano Smoothing, 3 Axis Nano Smoothing |
| A02B-0358-S687 | 32i-BP Nano Smoothing |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

193

Interpolation Functions

High-Speed and High-Quality Machining Package

Features

This function is a package for the FANUC 0i-MF series that contains the relevant options suitable for high-speed and high-quality machining, particularly for die/mold machining. The following options are combined in the package:

- AI Contour Control II
- Smooth Tolerance Control
- Jerk Control
- Machining Quality Level Adjustment Function

This function is a basic function in FANUC Series 0i-MF Plus (Type 0, 1 and 3).

Benefits

- Select the necessary options for high-speed and high-quality machining easily

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------------|
| A02B-0340-R660 | 0i-MF High-Speed and High-Quality Machining Package (Fine Mould Machining Package) |



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

194

Interpolation Functions

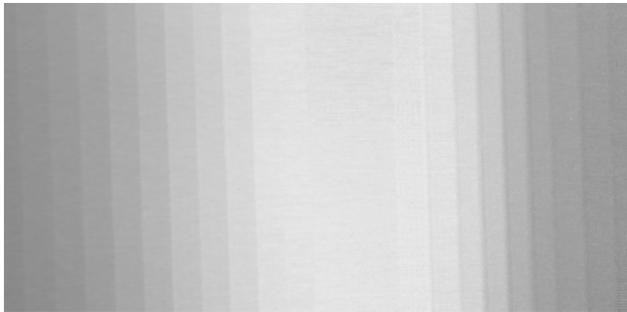

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Smooth Tolerance Control

Features

Smooth Tolerance⁺ Control improves the surface quality and accuracy of parts with free-form surfaces, which are often found in die/mold machining. Free-form surfaces are usually approximated by a sequence of multiple small linear elements. This leads to the undesired consequence that the transitions between linear blocks are visible on the surface of the workpiece after machining.

Smooth Tolerance⁺ Control has a sophisticated algorithm which converts a sequence of multiple small blocks automatically into a smooth curve which approximates that sequence within a given tolerance. This eliminates the surface artifacts and leads to a smoothly finished surface.

Smooth Tolerance⁺ Control detects corners in the path automatically. If a corner is detected, it is also converted into a smooth curve within a distinct tolerance. High-quality and high-precision machining is achieved with this feature.

Users can machine a workpiece that meets individual specifications by simply defining the two tolerances stated above. This saves time spent on fine-tuning the machined surface. Whether the path to be machined belongs to a free-form surface where a smooth finish is required, or to a corner where the priority is set on precision is determined automatically, meaning that both requirements can be fulfilled simultaneously.

This function is a basic function in FANUC Series 0i-MF Plus (Type 0, 1 and 3) and 0i-LF Plus.

Benefits


- Enhance surface quality of machined parts
- Simplify fine-tuning of surface quality

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-R696 | 30i-B Smooth Tolerance+ Control |
| A02B-0326-R696 | 31i-B5 Smooth Tolerance+ Control |
| A02B-0327-R696 | 31i-B Smooth Tolerance+ Control |
| A02B-0328-R696 | 32i-B Smooth Tolerance+ Control |
| A02B-0340-R696 | 0i-MF Smooth Tolerance+ Control |
| A02B-0353-R696 | 30i-BP Smooth Tolerance+ Control |
| A02B-0356-R696 | 31i-B5P Smooth Tolerance+ Control |
| A02B-0357-R696 | 31i-BP Smooth Tolerance+ Control |
| A02B-0358-R696 | 32i-BP Smooth Tolerance+ Control |

195

Interpolation Functions

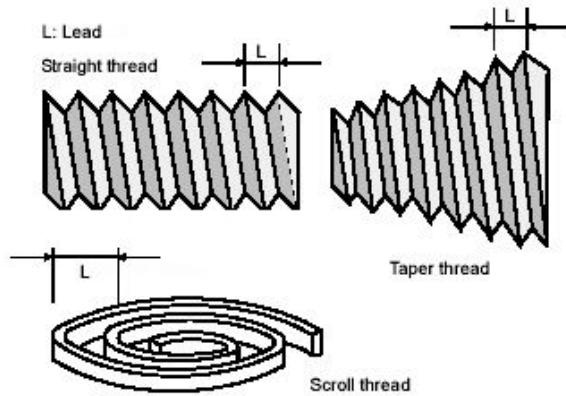

Thread Cutting, Synchronous Cutting

Features

When feeding the tool in synchronization with the spindle rotation a threading of the specified lead can be performed with the Thread Cutting / Synchronous Cutting function.

In addition to straight threads, taper threads and scroll threads can be cut with equal leads. The spindle encoder is used to accurately initiate axis motion.

This function is a basic function in FANUC Series 0i-MF (Type 1, Type 3), 0i-TF (all Types) and 0i-F Plus (all Types except 0i-MF Plus Type 5).

Benefits

- Allows thread cutting on large holes, with single point tooling
- Accurate machining on multiple threading passes

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-J824 | 30i-B Thread Cutting, Synchronous Cutting |
| A02B-0326-J824 | 31i-B5 Thread Cutting, Synchronous Cutting |
| A02B-0327-J824 | 31i-B Thread Cutting, Synchronous Cutting |
| A02B-0328-J824 | 32i-B Thread Cutting, Synchronous Cutting |
| A02B-0350-J824 | 0i-MFP Thread Cutting, Synchronous Cutting |
| A02B-0353-J824 | 30i-BP Thread Cutting / Synchronous Cutting |
| A02B-0356-J824 | 31i-B5P Thread Cutting / Synchronous Cutting |
| A02B-0357-J824 | 31i-BP Thread Cutting / Synchronous Cutting |
| A02B-0358-J824 | 32i-BP Thread Cutting / Synchronous Cutting |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

196

Interpolation Functions

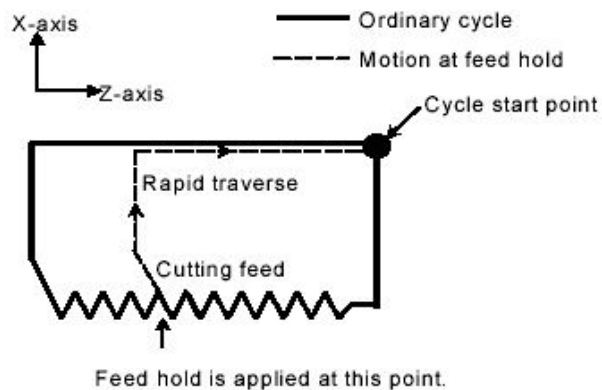

Thread Cutting Retract

Features

Threading Retract (Canned Cycle)

Feed hold may be applied during threading. In this case, the tool immediately retracts with chamfering and returns to the start point on the second axis (X-axis), then the first axis (Z-axis) on the plane.

The amount of chamfering during retraction is the same as that of chamfering at the end point.

Threading Retract (Multiple Repetitive Cycle)

If feed hold is applied during threading in the multiple repetitive threading cycle (G76), chamfering for threading is performed and the tool returns to the threading cycle start point and stops. If a cycle start operation is performed here, machining restarts with the threading cycle to which feed hold was applied.

The amount of chamfering during retraction is the same as that of chamfering at the end point.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Adds additional modes to the thread cutting operation
- Simplifies programming and restart
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-J825 | 30i-B Thread Cutting Retract |
| A02B-0326-J825 | 31i-B5 Thread Cutting Retract |
| A02B-0327-J825 | 31i-B Thread Cutting Retract |
| A02B-0328-J825 | 32i-B Thread Cutting Retract |
| A02B-0353-J825 | 30i-BP Thread Cutting Retract |
| A02B-0356-J825 | 31i-B5P Thread Cutting Retract |
| A02B-0357-J825 | 31i-BP Thread Cutting Retract |
| A02B-0358-J825 | 32i-BP Thread Cutting Retract |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

197

Interpolation Functions

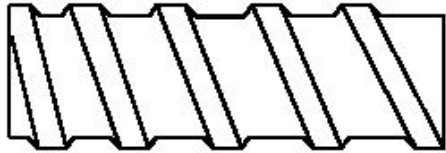

Variable lead screw

Variable Lead Thread Cutting

Features

This function allows while specifying an increment or a decrement value for a lead per screw revolution a variable lead threading to be performed.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Adds additional advanced threading capabilities to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-J827 | 30i-B Variable Lead Thread Cutting |
| A02B-0326-J827 | 31i-B5 Variable Lead Thread Cutting |
| A02B-0327-J827 | 31i-B Variable Lead Thread Cutting |
| A02B-0328-J827 | 32i-B Variable Lead Thread Cutting |
| A02B-0353-J827 | 30i-BP Variable Lead Thread Cutting |
| A02B-0356-J827 | 31i-B5P Variable Lead Thread Cutting |
| A02B-0357-J827 | 31i-BP Variable Lead Thread Cutting |
| A02B-0358-J827 | 32i-BP Variable Lead Thread Cutting |



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

198

Interpolation Functions

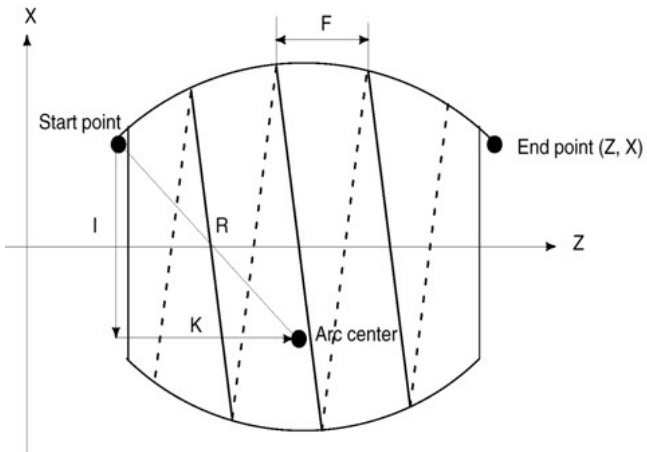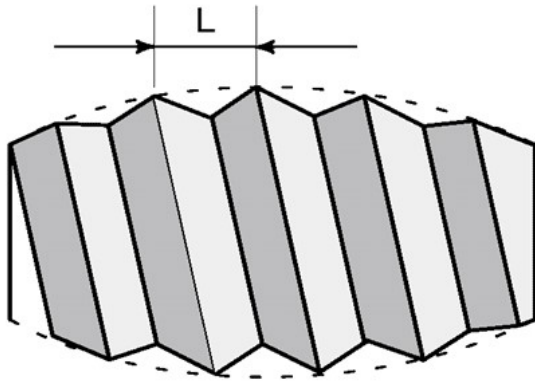

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Circular Thread Cutting

Features

Allows threading of circular surfaces such as cylinder. Easy to program with simple G code (G35 and G36)

Benefits

- Adds advanced capabilities for thread cutting to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-J731 | 30i-B Circular Thread Cutting |
| A02B-0326-J731 | 31i-B5 Circular Thread Cutting |
| A02B-0327-J731 | 31i-B Circular Thread Cutting |
| A02B-0328-J731 | 32i-B Circular Thread Cutting |
| A02B-0339-J731 | 0i-TF Circular Thread Cutting |
| A02B-0349-J731 | 0i-TFP Circular Thread Cutting |
| A02B-0353-J731 | 30i-BP Circular Thread Cutting |
| A02B-0356-J731 | 31i-B5P Circular Thread Cutting |
| A02B-0357-J731 | 31i-BP Circular Thread Cutting |
| A02B-0358-J731 | 32i-BP Circular Thread Cutting |

199

Interpolation Functions

Circular Thread Cutting B

Features

The Circular Thread Cutting B function performs circular interpolation according to the feed rate of the major axis, which has longer travelling distance. At the same time, up to two axes can be interpolated in proportion to the feed rate of the major axis.

This circular threading function does not move a tool in synchronization with the rotation of the spindle(workpiece) using the spindle motor.


This function controls workpiece rotation using a servo motor(rotation axis) to perform threading at equal pitches along cylindrical material, grooving, and tool grinding.

Benefits

- Adds additional advanced thread cutting capabilities to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-R631 | 30i-B Circular Thread Cutting B |
| A02B-0326-R631 | 31i-B5 Circular Thread Cutting B |
| A02B-0327-R631 | 31i-B Circular Thread Cutting B |
| A02B-0353-R631 | 30i-BP Circular Thread Cutting B |
| A02B-0356-R631 | 31i-B5P Circular Thread Cutting B |
| A02B-0357-R631 | 31i-BP Circular Thread Cutting B |

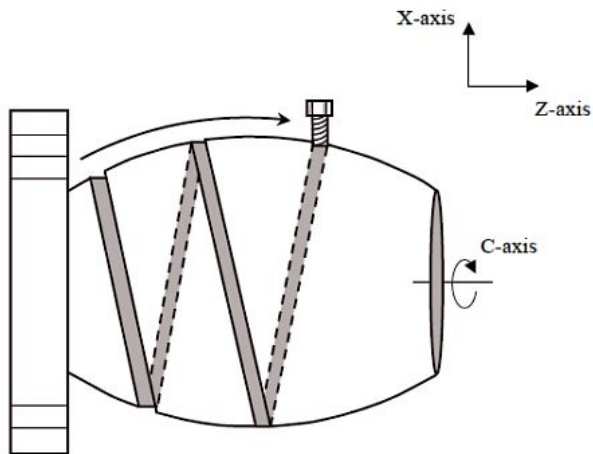


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

200

Interpolation Functions

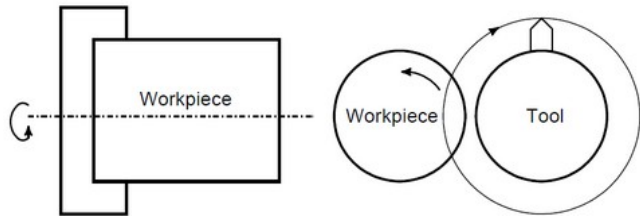

Polygon Turning

Features

The Polygon Turning function allows the programmer to machine (turn) a workpiece into a polygonal figure by rotating the workpiece (spindle axis) and tool (rotary tool axis) at a certain ratio.

This function is a basic function in FANUC Series 0i-TF (Type 1) and 0i-TF Plus (all Types).

Benefits

- Provides the capability to machine square and / or hexagonal heads on bolts or hexagonal nuts.
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0323-J817 | 30i-B Polygon Turning |
| A02B-0326-J817 | 31i-B5 Polygon Turning |
| A02B-0327-J817 | 31i-B Polygon Turning |
| A02B-0328-J817 | 32i-B Polygon Turning |
| A02B-0339-J817 | 0i-TF Polygon Turning |
| A02B-0353-J817 | 30i-BP Polygon Turning |
| A02B-0356-J817 | 31i-B5P Polygon Turning |
| A02B-0357-J817 | 31i-BP Polygon Turning |
| A02B-0358-J817 | 32i-BP Polygon Turning |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

201

Interpolation Functions

Polygon Machining with Two Spindles

Features

The Polygon Turning with Two Spindles function allows the programmer to machine (turn) a workpiece into a polygonal figure by rotating the workpiece and the tool at a certain ratio. Both axes must be spindle axes, each controlled by a Serial Spindle.

This function is a basic function in FANUC Series 0i-TF (Type 1) and 0i-TF Plus (Type 0, Type 1).

Benefits

- Polygon Turning with Two Spindles is used for machining square and/or hexagonal heads on bolts, or for hexagonal nuts, where the two synchronized axes are spindle axes
- Important feature on lathes with mill-turn capability
- With a multiple path system, polygon turning is possible on each path

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-J708 | 30i-B Polygon Turning with Two Spindles |
| A02B-0326-J708 | 31i-B5 Polygon Turning with Two Spindles |
| A02B-0327-J708 | 31i-B Polygon Turning with Two Spindles |
| A02B-0328-J708 | 32i-B Polygon Turning with Two Spindles |
| A02B-0339-J708 | 0i-TF Polygon Turning with Two Spindles |
| A02B-0349-J708 | 0i-TFP Polygon Machining with Spindle |
| A02B-0353-J708 | 30i-BP Polygon Machining with 2 Spindles |
| A02B-0356-J708 | 31i-B5P Polygon Machining with 2 Spindles |
| A02B-0357-J708 | 31i-BP Polygon Machining with 2 Spindles |
| A02B-0358-J708 | 32i-BP Polygon Machining with 2 Spindles |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

202

Interpolation Functions

Multi-Step Skip

Features

Multi-Step Skip, activated in a block by specifying P1 to P4 after G31, stores coordinates in a custom macro variable, when a skip signal, (4-point or 8-point; 8-point when a high-speed skip signal is used) is turned on.

In the block where Q1 to Q4 are specified after G04, dwell can be skipped when skip signals (four or eight signals, or eight signals when high-speed skip signals are used) are input. A skip signal from equipment such as a fixed-dimension measuring instrument can be used to skip programs being executed.

In plunge grinding, for example, a series of operations from rough machining to spark-out can be performed automatically by applying a skip signal each time rough machining, semi-fine machining, fine-machining, or spark-out operation is completed.

This function is a basic function in FANUC Series 0i-MF Plus.

Note

Multi-Step Skip requires the Custom Macro B option to be able to access the stored variables.

Benefits

- Adds special skip functions to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-J849 | 30i-B Multi-Step Skip Function |
| A02B-0326-J849 | 31i-B5 Multi-Step Skip Function |
| A02B-0327-J849 | 31i-B Multi-Step Skip Function |
| A02B-0328-J849 | 32i-B Multi-Step Skip Function |
| A02B-0339-J849 | 0i-TF Multi-Step Skip |
| A02B-0340-J849 | 0i-MF Multi-Step Skip |
| A02B-0349-J849 | 0i-TFP Multi-Step Skip |
| A02B-0353-J849 | 30i-BP Multi-Step Skip |
| A02B-0356-J849 | 31i-B5P Multi-Step Skip |
| A02B-0357-J849 | 31i-BP Multi-Step Skip |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

203

| Specification | Description |
|----------------|------------------------|
| A02B-0358-J849 | 32i-BP Multi-Step Skip |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

204

Interpolation Functions

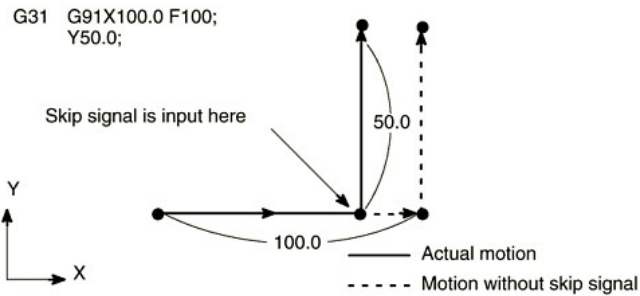

High-Speed Skip

Features

High-Speed Skip allows the skip function to operate based on a high-speed skip input signal, connected directly to the CNC; not via the PMC like the ordinary skip signal.

Up to eight high-speed signals can be input for the Series 30i-B, up to four high-speed signals can be input for the Series 0i-F.

The response time of the skip signal input is 2 msec at the CNC side (not considering those at the PMC side). High-Speed Skip keeps this value to 0.1 msec or less, thus allowing high precision measurement.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Faster response improves accuracy at higher feed rates
- Improves cycle time

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0323-J848 | 30i-B High-Speed Skip |
| A02B-0326-J848 | 31i-B5 High-Speed Skip |
| A02B-0327-J848 | 31i-B High-Speed Skip |
| A02B-0328-J848 | 32i-B High-Speed Skip |
| A02B-0333-J848 | 35i-B High-Speed Skip |
| A02B-0334-J848 | PM i-A High-Speed Skip |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

205

Interpolation Functions

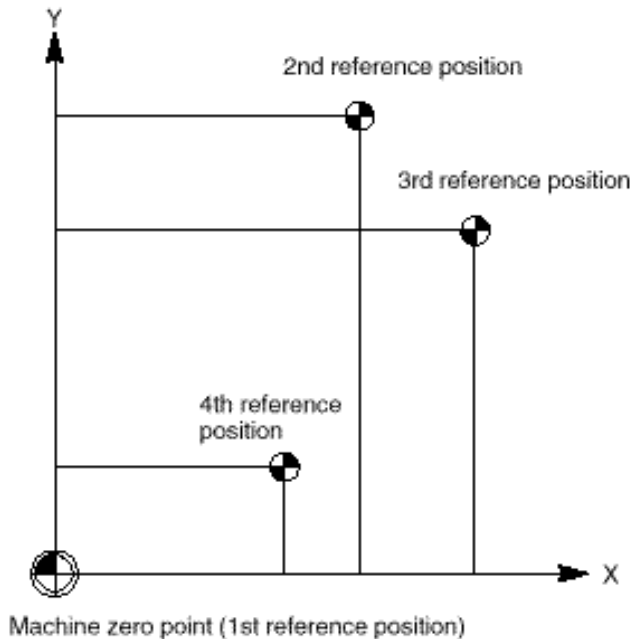

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

3rd/4th Reference Position Return

Features

The 3rd/4th Reference Position Return function provides two G-codes to position the machine to two fixed points in the machine coordinate system (regardless of the part zero location).

Fixed point locations can be easily changed in parameters.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits


- Reduced cycle or set up time
- Operator MDI's or programs a G-code, instead of manually moving the axis to a fixed position for part change, inspection, etc.

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-J830 | 30i-B 3rd / 4th Reference Point Return |
| A02B-0326-J830 | 31i-B5 3rd / 4th Reference Point Return |
| A02B-0327-J830 | 31i-B 3rd / 4th Reference Point Return |
| A02B-0328-J830 | 32i-B 3rd / 4th Reference Point Return |

206

Interpolation Functions

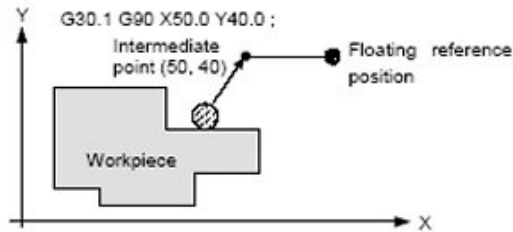

Floating Reference Position Return

Features

With the Floating Reference Position Return function, tools can be returned to the floating reference position.

A floating reference position is a position on a machine tool, and serves as a reference position for machine tool operation.

A floating reference position does not always need to be fixed, but can be moved as required.

Benefits

- Adds flexibility to the machine
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-J831 | 30i-B Floating Reference Position Return |
| A02B-0326-J831 | 31i-B5 Floating Reference Position Return |
| A02B-0327-J831 | 31i-B Floating Reference Position Return |
| A02B-0328-J831 | 32i-B Floating reference Position Return |
| A02B-0353-J831 | 30i-BP Float Reference Position Return |
| A02B-0356-J831 | 31i-B5P Float Reference Position Return |
| A02B-0357-J831 | 31i-BP Float Reference Position Return |
| A02B-0358-J831 | 32i-BP Float Reference Position Return |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

207

Interpolation Functions

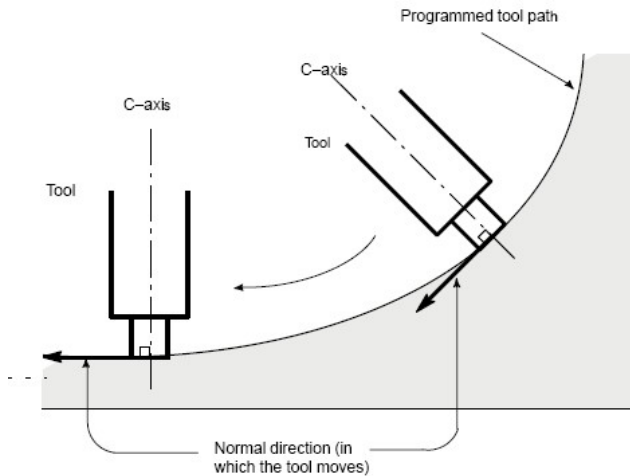

Normal Direction Control

Features

In the Normal Direction Control, the rotary axis (C axis) can be commanded so that the tool constantly faces the advancing workpiece and is always perpendicular to the plane of the workpiece during cutting.

This function is a basic function in FANUC Series 0i-MF (Type 1), 0i-PF, 0i-MF Plus (Type 0, Type 1) and 0i-LF Plus.

Benefits

- Used on precision Jig Grinders to rotate the C Axis to keep it normal (perpendicular) to a position in the X-Y plane.

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J813 | 30i-B Normal Direction Control |
| A02B-0326-J813 | 31i-B5 Normal Direction Control |
| A02B-0327-J813 | 31i-B Normal Direction Control |
| A02B-0328-J813 | 32i-B Normal Direction Control |
| A02B-0339-J813 | 0i-TF Normal Direction Control |
| A02B-0349-J813 | 0i-TFP Normal Direction Control |
| A02B-0350-J813 | 0i-MFP Normal Direction Control |
| A02B-0353-J813 | 30i-BP Normal Direction Control |
| A02B-0356-J813 | 31i-B5P Normal Direction Control |
| A02B-0357-J813 | 31i-BP Normal Direction Control |
| A02B-0358-J813 | 32i-BP Normal Direction Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

208

Interpolation Functions

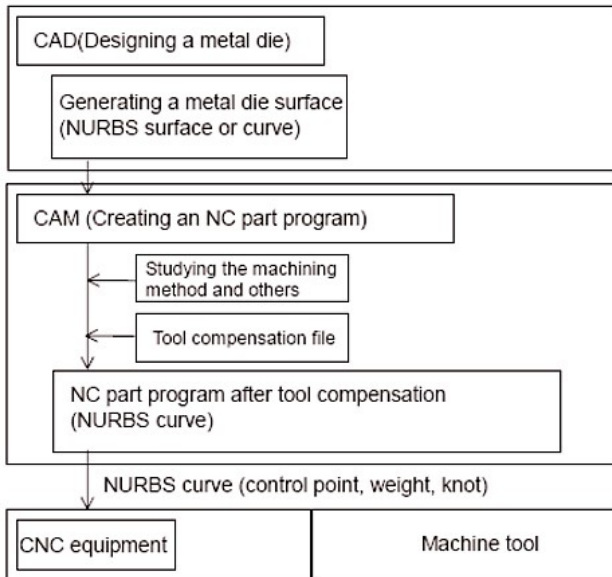

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

NURBS Interpolation

Features

Many Computer-Aided Design (CAD) systems used to design metal dies or complex shapes utilize Non-Uniform Rational B Spline (NURBS) to express a sculptured surface or curve for the metal dies.

The NURBS Interpolation function provides the operator with the ability to execute a NURBS program once it has been transferred to the CNC.

The CNC is capable of compensating for tool variations etc., then running the NURBS program.

Benefits


- CNC compatibility with the widely accepted CAD/CAM NURBS format.
- NURBS part programs are smaller programs than the equivalent conventional piece-wise linear block segments, are processed more quickly by the CNC, and therefore reduce the likelihood of dwell marks in the workpiece.
- Due to the smaller NURBS part program size, the need for high-speed transfer between the CNC and an external PC may be avoided (normally required for conventional part programs of large size).

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-J669 | 30i-B NURBS Interpolation |
| A02B-0326-J669 | 31i-B5 NURBS Interpolation |
| A02B-0327-J669 | 31i-B NURBS Interpolation |
| A02B-0353-J669 | 30i-BP NURBS Interpolation |
| A02B-0356-J669 | 31i-B5P NURBS Interpolation |
| A02B-0357-J669 | 31i-BP NURBS Interpolation |

209

Interpolation Functions

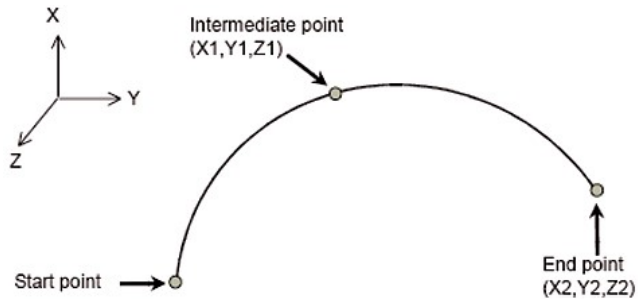

3-Dimensional Circular Interpolation

Features

The 3-Dimensional Circular Interpolation function allows the programmer to specify an arc in 3-D space, using the current position as the start point.

Benefits

- Permits the programmer to describe an arc, using the current position as the start point, and specifying any intermediate point, plus the end point.

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-S673 | 30i-B 3-Dimensional Circular Interpolation |
| A02B-0326-S673 | 31i-B5 3-Dimensional Circular Interpolation |
| A02B-0327-S673 | 31i-B 3-Dimensional Circular Interpolation |
| A02B-0328-S673 | 32i-B 3-Dimensional Circular Interpolation |
| A02B-0353-S673 | 30i-BP 3-D Circular Interpolation |
| A02B-0356-S673 | 31i-B5P 3-D Circular Interpolation |
| A02B-0357-S673 | 31i-BP 3-D Circular Interpolation |
| A02B-0358-S673 | 32i-BP 3-D Circular Interpolation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

210

Interpolation Functions

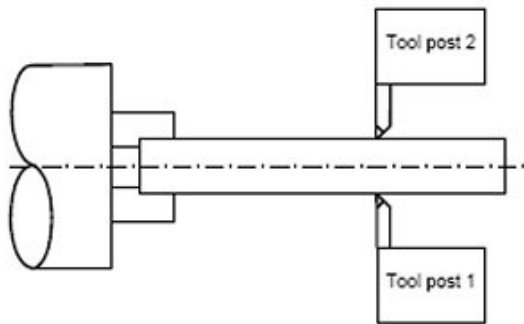

Balanced Cutting

Features

The Balanced Cutting function can be used when machining a single part with two turrets at the same time.

If a thin workpiece needs to be machined a precision machining can be achieved by machining each side of the workpiece with a tool simultaneously; this function can prevent the workpiece from warpage that can result when only one side is machined at a time (see the figure below).

When both sides are machined at the same time, the movement of one tool must be in phase with that of the other tool. Otherwise, the workpiece can vibrate, resulting in poor machining. With this function, the movement of one tool post can be easily synchronized with that of the other tool post.

Benefits

- Adds special function to machine thin parts to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0323-J834 | 30i-B Balanced Cutting |
| A02B-0326-J834 | 31i-B5 Balanced Cutting |
| A02B-0327-J834 | 31i-B Balanced Cutting |
| A02B-0328-J834 | 32i-B Balanced Cutting |
| A02B-0339-J834 | 0i-TF Balanced Cutting |
| A02B-0349-J834 | 0i-TFP Balanced Cutting |
| A02B-0353-J834 | 30i-BP Balanced Cutting |
| A02B-0356-J834 | 31i-B5P Balanced Cutting |
| A02B-0357-J834 | 31i-BP Balanced Cutting |
| A02B-0358-J834 | 32i-BP Balanced Cutting |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

211

Interpolation Functions



Index Table Indexing

Features

The Table Indexing function can be used to control rotary axes that index between predefined locations. By specifying indexing positions (angles) for the indexing axis (one arbitrary axis), the index table of the machining center can be indexed.

It is not necessary to command the exclusive M code in order to clamp or unclamp the table, the CNC will automatically send signals to the PMC to do this, and therefore programming will be easier.

This function is a basic function in FANUC Series 0i-MF (Type 1, Type 3) and 0i-MF Plus (Type 0, 1 and 3).

Benefits

- Simplifies the integration of a rotary table in the machine
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J822 | 30i-B Index Table Indexing |
| A02B-0326-J822 | 31i-B5 Index Table Indexing |
| A02B-0327-J822 | 31i-B Index Table Indexing |
| A02B-0328-J822 | 32i-B Index Table Indexing |
| A02B-0353-J822 | 30i-BP Index Table Indexing |
| A02B-0356-J822 | 31i-B5P Index Table Indexing |
| A02B-0357-J822 | 31i-BP Index Table Indexing |
| A02B-0358-J822 | 32i-BP Index Table Indexing |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

212

Interpolation Functions

G31 P90 α __ F__

α __: Skip axis address and amount of travel
Only one axis can be specified. G31 is a one-shot G code.

Continuous High-Speed Skip

Features

The Continuous High-Speed Skip function enables the reading of absolute coordinates by using the high-speed skip signal.

Once a high-speed skip signal has been input in a G31 P90 block, the absolute coordinates are read into custom macro variables #5061 to #5068.

The input of a skip signal does not stop axial movement, thus enabling reading of the coordinates of two or more points. The rising and falling edges of the high-speed skip signal can be used as a trigger, depending on the parameter setting.

Benefits

- Adds advanced skip capabilities to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J770 | 30i-B Continuous High-Speed Skip |
| A02B-0326-J770 | 31i-B5 Continuous High-Speed Skip |
| A02B-0327-J770 | 31i-B Continuous High-Speed Skip |
| A02B-0328-J770 | 32i-B Continuous High-Speed Skip |
| A02B-0339-J770 | 0i-TF Continuous High-Speed Skip |
| A02B-0340-J770 | 0i-MF Continuous High-Speed Skip |
| A02B-0349-J770 | 0i-TFP Continuous High-Speed Skip |
| A02B-0350-J770 | 0i-MFP Continuous High-Speed Skip |
| A02B-0353-J770 | 30i-BP Continuous High-Speed Skip |
| A02B-0356-J770 | 31i-B5P Continuous High-Speed Skip |
| A02B-0357-J770 | 31i-BP Continuous High-Speed Skip |
| A02B-0358-J770 | 32i-BP Continuous High-Speed Skip |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

213

Interpolation Functions

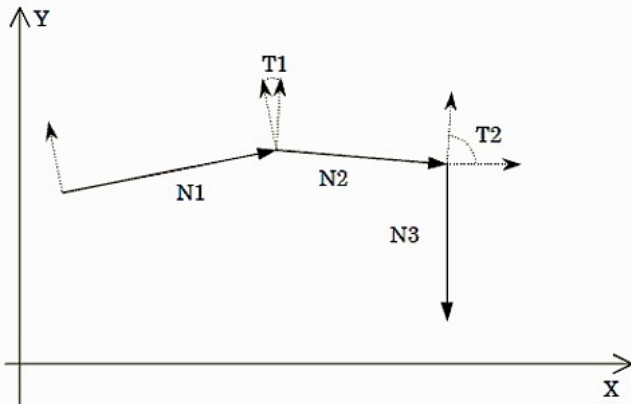

α : The value of parameter No.5485

T1 : The angle which rotates from N1 to N2 ($T1 < \alpha$)

T2 : The angle which rotates from N2 to N3 ($T2 \geq \alpha$)

Gentle Normal Direction Control

Features

On a machine where a rotary axis controls the tool direction (typically the C-axis) Normal Direction Control function will automatically position the 'C' tool-axis in order to maintain the same angular relationship of the tool with respect to any programmed path direction change in the X-Y coordinate system.

In regular normal-direction control mode [J813], the rotation of the normal-direction controlled tool-axis [C-axis] is inserted between any axes [X/Y axis] direction changes. The X/Y axes always stop while the C-axis rotates to the new normal position for the next program block.

Sometimes, for small angle X/Y direction changes, it is not desirable to stop the X/Y axes while the in C-axis (Tool-axis) rotates to position. In Gentle Normal Direction Control mode, providing the C-axis rotation angle is less than a parametrically set angle, the X/Y axes do not stop while the C-axis rotates to the new normal position.

Benefits

- Used on precision Jig Grinders to rotate the C-Axis to keep it normal (perpendicular) to a position in the X-Y plane.
- Useful for servo-controlled grinding diamond wheel dresser. Maintains the angle of diamond tip angle with respect to grinding wheel dress form.
- Gentle function prevents dwells where over-cutting could occur.

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-J986 | 30i-B Gentle Normal Direction Control |
| A02B-0326-J986 | 31i-B5 Gentle Normal Direction Control |
| A02B-0327-J986 | 31i-B Gentle Normal Direction Control |
| A02B-0328-J986 | 32i-B Gentle Normal Direction Control |
| A02B-0353-J986 | 30i-BP Gentle Normal Direction Control |
| A02B-0356-J986 | 31i-B5P Gentle Normal Direction Control |
| A02B-0357-J986 | 31i-BP Gentle Normal Direction Control |
| A02B-0358-J986 | 32i-BP Gentle Normal Direction Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

214

Interpolation Functions

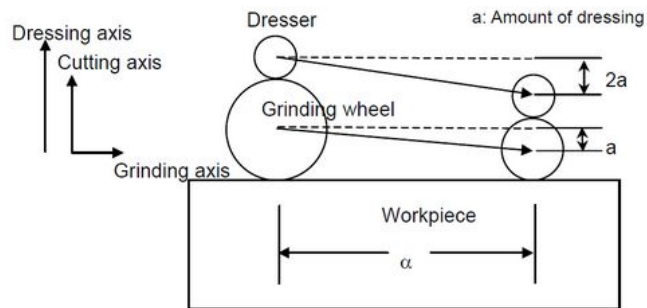

Continuous Dressing

Features

The Continuous Dressing function allows continuous dressing during grinding canned cycles (G75, G77, G78, G79).

Grinding and dresser cutting are compensated continuously according to the amount of continuous dressing set by parameters.

Benefits

- Automated production for large volume grinding
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-J630 | 30i-B Continuous Dressing |
| A02B-0326-J630 | 31i-B5 Continuous Dressing |
| A02B-0327-J630 | 31i-B Continuous Dressing |
| A02B-0328-J630 | 32i-B Continuous Dressing |
| A02B-0353-J630 | 30i-BP Continuous Dressing |
| A02B-0356-J630 | 31i-B5P Continuous Dressing |
| A02B-0357-J630 | 31i-BP Continuous Dressing |
| A02B-0358-J630 | 32i-BP Continuous Dressing |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

215

Interpolation Functions

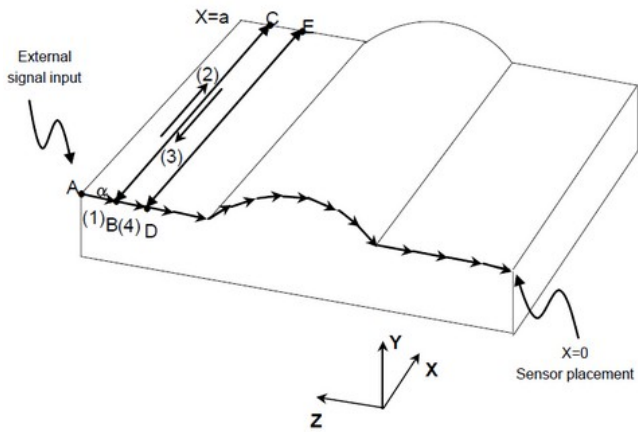

Infeed Control

Features

The Infeed Control function can be used on grinding machines. Every time an external signal is input, the machine is moved by a fixed amount along the programmed profile in the specified Y-Z plane.

Benefits

- Automatically repeat cutting motion from an external signal such as push button from operator panel
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0323-J631 | 30i-B Infeed Control |
| A02B-0326-J631 | 31i-B5 Infeed Control |
| A02B-0327-J631 | 31i-B Infeed Control |
| A02B-0328-J631 | 32i-B Infeed Control |
| A02B-0353-J631 | 30i-BP Infeed Control |
| A02B-0356-J631 | 31i-B5P Infeed Control |
| A02B-0357-J631 | 31i-BP Infeed Control |
| A02B-0358-J631 | 32i-BP Infeed Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

216

Interpolation Functions

High-Speed Cycle Machining

Features

The High-Speed Cycle Machining function (also called High-Speed Cycle Cutting) is a function that accepts as input machining profil data consisting of command data for each involved axis based selected time interval, then distributes that data immediately to the motors controlling up to six designated axes.

Preparing the cycle data requires the use of the macro compiler and macro executor. The resulting cycle data must be operated on by the G05 command in the part program.

Benefits

- By virtue of being command data without interpolation, the CNC needs minimal overhead to deliver the required cycle data to the affected axes.
- Faster execution of the part program results, leading to higher productivity for the machine tool.
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J832 | 30i-B High-Speed Cycle Machining |
| A02B-0326-J832 | 31i-B5 High-Speed Cycle Machining |
| A02B-0327-J832 | 31i-B High-Speed Cycle Machining |
| A02B-0353-J832 | 30i-BP High-Speed Cycle Machining |
| A02B-0356-J832 | 31i-B5P High-Speed Cycle Machining |
| A02B-0357-J832 | 31i-BP High-Speed Cycle Machining |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

217

Interpolation Functions

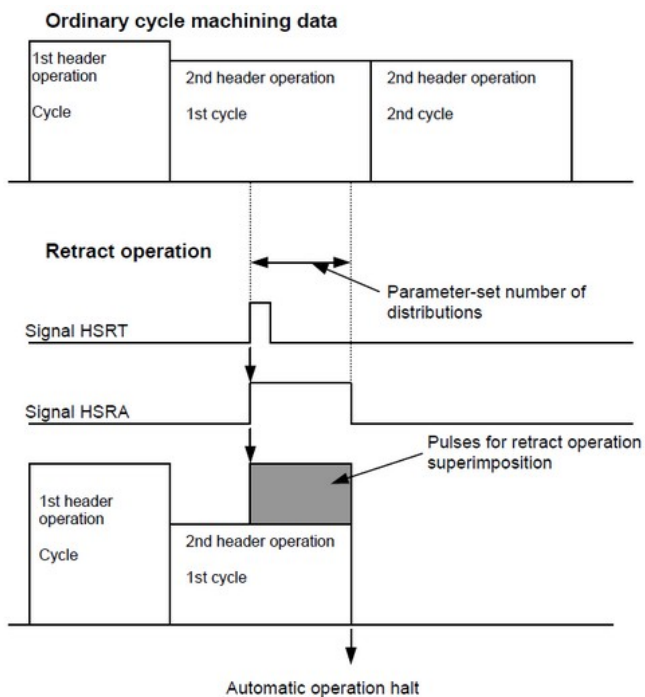

High-Speed Cycle Machining Retract Function

Features

When machining based on the high-speed cycle machining function needs to be stopped for a reason, the High-Speed Cycle Machining Retract function enables a retract operation to be performed by setting the retract selection signal HSRT (Gn065.3) to 1.

By registering a retract cycle in the high-speed cycle header, a cycle for performing an operation such as a special retract operation after a retract operation can be specified and executed.

Benefits

- Simplifies repetitive cycle programming in the CNC
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0323-J663 | 30i-B High-Speed Cycle Machining - Retract Function |
| A02B-0326-J663 | 31i-B5 High-Speed Cycle Machining - Retract Function |
| A02B-0327-J663 | 31i-B High-Speed Cycle Machining - Retract Function |
| A02B-0353-J663 | 30i-BP High-Speed Cycle Machining Retract Function |
| A02B-0356-J663 | 31i-B5P High-Speed Cycle Machining Retract Function |
| A02B-0357-J663 | 31i-BP High-Speed Cycle Machining Retract Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

218

Interpolation Functions

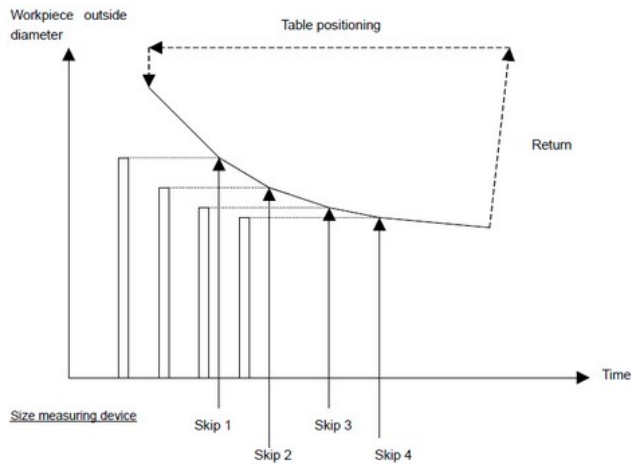

High-Speed Cycle Machining Skip Function

Features

The High-Speed Cycle Machining Skip function cancels a repetition cycle operation in high-speed cycle machining and causes a skip to the header information connected next.

Skip signals (HCSK1 to HCSK4) sent from a size measuring device (sensor) can be used to skip a currently executed machining cycle.

For continuous high-speed high-precision machining with a cylindrical grinding machine, for example, skip signals from the size measuring device are used when slight tool wear is detected.

Benefits

- Adds advanced skip functions to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-S662 | 30i-B High-Speed Cycle Machining - Skip Function |
| A02B-0326-S662 | 31i-B5 High-Speed Cycle Machining - Skip Function |
| A02B-0327-S662 | 31i-B High-Speed Cycle Machining - Skip Function |
| A02B-0353-S662 | 30i-BP High-Speed Cycle Machining Skip Function |
| A02B-0356-S662 | 31i-B5P High-Speed Cycle Machining Skip Function |
| A02B-0357-S662 | 31i-BP High-Speed Cycle Machining Skip Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

219

Interpolation Functions

High-Speed Cycle Cutting Additional Variables A

Features

Variables #200000 to #331071 (131,072 points) are assigned to the High-Speed Cycle Machining function, and may not be used for any other purpose.

Benefits

- Larger amounts of cycle data are made available to the High-Speed Cutting Command (G05).
- Enhances machine programming capabilities
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-J745 | 30i-B High-Speed Cycle Machining - Additional Variables A |
| A02B-0326-J745 | 31i-B5 High-Speed Cycle Machining - Additional Variables A |
| A02B-0327-J745 | 31i-B High-Speed Cycle Machining - Additional Variables A |
| A02B-0353-J745 | 30i-BP High-Speed Cycle Cutting Additional Variables A |
| A02B-0356-J745 | 31i-B5P High-Speed Cycle Cutting Additional Variables A |
| A02B-0357-J745 | 31i-BP High-Speed Cycle Cutting Additional Variables A |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

220

Interpolation Functions

High-Speed Cycle Cutting Additional Variables B

Features

Variables #200000 to #462143 (262,144 points) are assigned to the High-Speed Cycle Machining function, and may not be used for any other purpose.

Benefits

- Larger amounts of cycle data are made available to the High-Speed Cutting Command (G05).
- Enhances machine programming capabilities
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-J746 | 30i-B High-Speed Cycle Machining - Additional Variables B |
| A02B-0326-J746 | 31i-B5 High-Speed Cycle Machining - Additional Variables B |
| A02B-0327-J746 | 31i-B High-Speed Cycle Machining - Additional Variables B |
| A02B-0353-J746 | 30i-BP High-Speed Cycle Cutting Additional Variables B |
| A02B-0356-J746 | 31i-B5P High-Speed Cycle Cutting Additional Variables B |
| A02B-0357-J746 | 31i-BP High-Speed Cycle Cutting Additional Variables B |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

221

Interpolation Functions

High-Speed Cycle Cutting Additional Variables C

Features

Variables #200000 to #986431 (786,432 points) are assigned to the High-Speed Cycle Machining function, and may not be used for any other purpose.

Benefits

- Larger amounts of cycle data are made available to the High-Speed Cutting Command (G05).
- Enhances machine programming capabilities
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-S640 | 30i-B High-Speed Cycle Machining - Additional Variables C |
| A02B-0326-S640 | 31i-B5 High-Speed Cycle Machining - Additional Variables C |
| A02B-0327-S640 | 31i-B High-Speed Cycle Machining - Additional Variables C |
| A02B-0353-S640 | 30i-BP High-Speed Cycle Cutting Additional Variables C |
| A02B-0356-S640 | 31i-B5P High-Speed Cycle Cutting Additional Variables C |
| A02B-0357-S640 | 31i-BP High-Speed Cycle Cutting Additional Variables C |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

222

Interpolation Functions

High-Speed Cycle Cutting Additional Variables D

Features

Variables #2000000 to #3999999 (2,000,000 points) are assigned to the High-Speed Cycle Machining function, and may not be used for any other purpose.

Benefits

- Larger amounts of cycle data are made available to the High-Speed Cutting Command (G05).
- Enhances machine programming capabilities
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-R513 | 30i-B High-Speed Cycle Machining - Additional Variables D |
| A02B-0326-R513 | 31i-B5 High-Speed Cycle Machining - Additional Variables D |
| A02B-0327-R513 | 31i-B High-Speed Cycle Machining - Additional Variables D |
| A02B-0353-R513 | 30i-BP High-Speed Cycle Cutting Additional Variables D |
| A02B-0356-R513 | 31i-B5P High-Speed Cycle Cutting Additional Variables D |
| A02B-0357-R513 | 31i-BP High-Speed Cycle Cutting Additional Variables D |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

223

Interpolation Functions

High-Speed Cycle Cutting Additional Variables E

Features

Variables #2000000 to #4999999 (3,000,000 points) are assigned to the High-Speed Cycle Machining function, and may not be used for any other purpose.

Benefits

- Larger amounts of cycle data are made available to the High-Speed Cutting Command (G05).
- Enhances machine programming capabilities
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-R469 | 30i-B High-Speed Cycle Machining - Additional Variables E |
| A02B-0326-R469 | 31i-B5 High-Speed Cycle Machining - Additional Variables E |
| A02B-0327-R469 | 31i-B High-Speed Cycle Machining - Additional Variables E |
| A02B-0353-R469 | 30i-BP High-Speed Cycle Cutting Additional Variable E |
| A02B-0356-R469 | 31i-B5P High-Speed Cycle Cutting Additional Variable E |
| A02B-0357-R469 | 31i-BP High-Speed Cycle Cutting Additional Variables E |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

224

Interpolation Functions

High-Speed Cycle Machining Operation Information Output Function

Features

This function allows to output operation information to a PMC internal relay during high-speed cycle machining. The information can be used to coordinate subsequent processes and reduce the overall cycle time. The following operation information can be output to the PMC internal relay:

- Starting cycle no.
- Remaining count of repetitions per machining cycle
- Current cycle no.
- Remaining count of repetitions per cycle
- Current P-code variable no.
- Number of data items per cycle (setting data)
- Remaining number of data items per cycle

Benefits

- Reduce overall cycle time

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------|
| A02B-0323-R609 | 30i-B High-Speed Cycle Machining - Operation Information Output Function |
| A02B-0326-R609 | 31i-B5 High-Speed Cycle Machining - Operation Information Output Function |
| A02B-0327-R609 | 31i-B High-Speed Cycle Machining - Operation Information Output Function |
| A02B-0353-R609 | 30i-BP High-Speed Cycle Machining Operation Information Output Function |
| A02B-0356-R609 | 31i-B5P High-Speed Cycle Machining Operation Information Output Function |
| A02B-0357-R609 | 31i-BP High-Speed Cycle Machining Operation Information Output Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

225

Interpolation Functions

General Purpose Retract

Features

In automatic operation mode or in manual operation mode, setting the retract signal RTRCT to 1 causes the General Purpose Retract function to capture the rise of this signal, causing the tool to move (retract) along the axis for which a retract amount is specified by parameter. After the end of retraction, the retract completion signal RTRCTF is output.

This function is intended to retract the tool from the workpiece immediately when a tool breakage is detected.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- Adds special retract function to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-J997 | 30i-B General Purpose Retract |
| A02B-0326-J997 | 31i-B5 General Purpose Retract |
| A02B-0327-J997 | 31i-B General Purpose Retract |
| A02B-0328-J997 | 32i-B General Purpose Retract |
| A02B-0333-J997 | 35i-B General Purpose Retract |
| A02B-0349-J997 | 0i-TFP General Purpose Retract |
| A02B-0350-J997 | 0i-MFP General Purpose Retract |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

226

Interpolation Functions

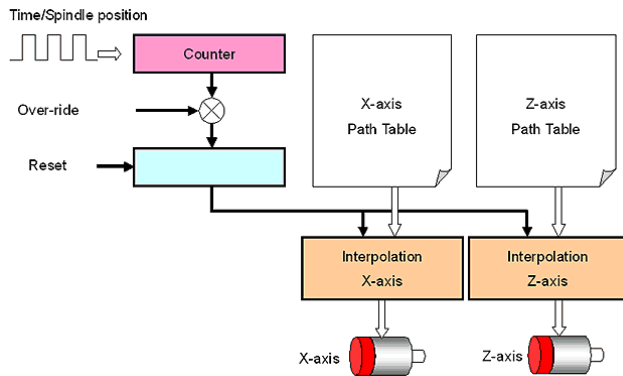

Path Table Operation (PTO)

Features

The Path Table Operation function is an advanced machining method which interpolates each axis synchronized with the spindle, axis position or the time based on Tables.

It realizes free motions unbound from the NC program block, and can be used in applications such as swiss lathes or crankshaft pin-milling machines.

Benefits

- Adds advanced Path Table Operation function to the CNC
- Allows complex interpolations for advanced machining operations
- Provides a high surface quality on complex parts
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-S886 | 30i-B Path Table Operation |
| A02B-0326-S886 | 31i-B5 Path Table Operation |
| A02B-0327-S886 | 31i-B Path Table Operation |
| A02B-0353-S886 | 30i-BP Path Table Operation |
| A02B-0356-S886 | 31i-B5P Path Table Operation |
| A02B-0357-S886 | 31i-BP Path Table Operation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

227

Interpolation Functions

Spindle Speed Fluctuation Detection for Path Table Operation

Features

The conventional spindle speed fluctuation detection can be enabled or disabled by G code when executing an NC program, but it cannot be switched in Path Table Operation.

The Spindle Speed Fluctuation Detection for Path Table Operation enables or disables spindle speed fluctuation detection by commanding G code. As a result, the cutting failure caused by spindle speed fluctuation in Path Table Operation can be prevented.

Benefits

- Adds the capability to monitor spindle speed fluctuation to Path Table Operation
- Reduces the risk to produce bad parts without knowing it
- Simplifies startup and test of programs
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------|
| A02B-0323-R605 | 30i-B Spindle Speed Fluctuation Detection for Path Table Operation |
| A02B-0326-R605 | 31i-B5 Spindle Speed Fluctuation Detection for Path Table Operation |
| A02B-0327-R605 | 31i-B Spindle Speed Fluctuation Detection for Path Table Operation |
| A02B-0353-R605 | 30i-BP Spindle Speed Fluctuation Detection for Path Table Operation |
| A02B-0356-R605 | 31i-B5P Spindle Speed Fluctuation Detection for Path Table Operation |
| A02B-0357-R605 | 31i-BP Spindle Speed Fluctuation Detection for Path Table Operation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

228

Interpolation Functions

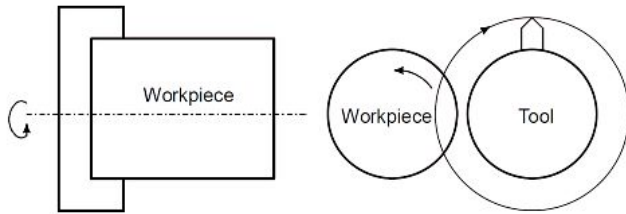

Polygon Turning Function for Path Table Operation

Features

The Polygon Turning Function for Path Table Operation enables the polygon turning by the spindle and the tool rotating axis (servo axis).

Polygon turning means machining a workpiece to a polygonal figure by rotating the workpiece and tool at a certain ratio. By changing conditions that are rotation ratio of workpiece and tool and number of cutters, the workpiece can be machined to a square or hexagon. The machining time can be reduced as compared with polygonal figure machining using the polar coordinate interpolation. The machined figure, however, is not exactly polygonal.

Generally, polygon turning is used for the heads of square or hexagon bolts or nuts.

This function uses the spindle as the workpiece axis and the servo axis as the tool rotation axis.

Benefits

- Provides the polygon turning function to a lathe using Path Table Operation
- Simplifies the programming of lathe producing bolts and nuts
- Increases the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------|
| A02B-0323-R598 | 30i-B Polygon Turning Function for Path Table Operation |
| A02B-0326-R598 | 31i-B5 Polygon Turning Function for Path Table Operation |
| A02B-0327-R598 | 31i-B Polygon Turning Function for Path Table Operation |
| A02B-0353-R598 | 30i-BP Polygon Turning Function for Path Table Operation |
| A02B-0356-R598 | 31i-B5P Polygon Turning Function for Path Table Operation |
| A02B-0357-R598 | 31i-BP Polygon Turning Function for Path Table Operation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

229

Interpolation Functions

Threading Start Position Shift Function for Path Table Operation

Features

In Path Table Operation, this function can command the spindle position at the start of threading with a custom macro common variable.

In this case, the spindle position can be changed simply by changing a variable value, and it is unnecessary to reconvert the Path Table programs.

Benefits

- Adds the capability to use macro variable position the spindle on threading operation
- Simplifies programming and avoids the conversion of the table when a value is changed
- Increases productivity of the machine

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------|
| A02B-0323-R599 | 30i-B Threading Start Position Shift Function for Path Table Operation |
| A02B-0326-R599 | 31i-B5 Threading Start Position Shift Function for Path Table Operation |
| A02B-0327-R599 | 31i-B Threading Start Position Shift Function for Path Table Operation |
| A02B-0353-R599 | 30i-BP Threading Start Position Shift Function for Path Table Operation |
| A02B-0356-R599 | 31i-B5P Threading Start Position Shift Function for Path Table Operation |
| A02B-0357-R599 | 31i-BP Threading Start Position Shift Function for Path Table Operation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

230

Interpolation Functions

Tool Offset Function for Path Table Operation

Features

This function provides the capability to specify Tool Offset with the path table operation of X-axis, Z-axis and Y-axis.

The value of tool geometry offset and tool wear offset in total is compensated when both tool geometry offset number and tool wear offset number are specified. When one side of the tool geometry offset number or the tool wear offset number is specified, only the specified tool offset is done.

Benefits

- Provides tool offset function to Path Table Operation
- Simplifies the programming
- Increases the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-R524 | 30i-B Path Table Operation Position Compensation |
| A02B-0326-R524 | 31i-B5 Path Table Operation Position Compensation |
| A02B-0327-R524 | 31i-B Path Table Operation Position Compensation |
| A02B-0353-R524 | 30i-BP Path Table Operation Position Compensation |
| A02B-0356-R524 | 31i-B5P Path Table Operation Position Compensation |
| A02B-0357-R524 | 31i-BP Path Table Operation Position Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

231

Interpolation Functions

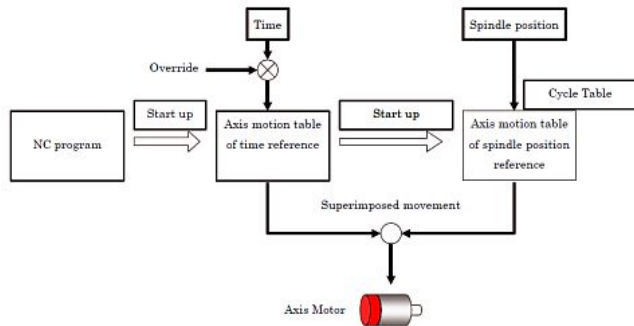

Cycle Table Operation Function for Path Table Operation

Features

The axis motion table of spindle position reference can be started up as a "Cycle Table" from the axis motion table of time reference.

The movement commanded by the cycle table and the movement commanded by the axis motion table of time reference are superimposed.

One cycle table can be specified in one axis motion table of time reference.

Benefits

- Provides interaction between axis and spindle movements
- Simplifies the programming
- Increases the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------|
| A02B-0323-R526 | 30i-B Cycle Table Operation Function in Path Table Operation |
| A02B-0326-R526 | 31i-B5 Cycle Table Operation Function in Path Table Operation |
| A02B-0327-R526 | 31i-B Cycle Table Operation Function in Path Table Operation |
| A02B-0353-R526 | 30i-BP Cycle Table Operation Function in Path Table Operation |
| A02B-0356-R526 | 31i-B5P Cycle Table Operation Function in Path Table Operation |
| A02B-0357-R526 | 31i-BP Cycle Table Operation Function in Path Table Operation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

232

Interpolation Functions



Delay Time Setting Function of Auxiliary Function Output for PTO

Features

The Path Table Operation can output M codes, based on the Auxiliary Function Table synchronized with the time, the axis position or the spindle position.

When the Auxiliary Function Table is synchronized with the time, the output of the M codes are realized in real-time since the M codes outputted can be commanded with a "Delay Time".

The Path Table Operation outputs M codes earlier compared to the table time which takes in consideration the "Delay Time". Three M-codes can be output at once. The ordered M code is outputted according to each delay time.

Benefits

- Provides additional time synchronization for the auxiliary function
- Simplifies the programming
- Increases the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------------------|
| A02B-0323-R528 | 30i-B Delay Time Setting Function of Auxiliary Function Output in Path Table Operation |
| A02B-0326-R528 | 31i-B5 Delay Time Setting Function of Auxiliary Function Output in Path Table Operation |
| A02B-0327-R528 | 31i-B Delay Time Setting Function of Auxiliary Function Output in Path Table Operation |
| A02B-0353-R528 | 30i-BP Delay Time Setting Function of Auxiliary Function Output in Path Table Operation |
| A02B-0356-R528 | 31i-B5P Delay Time Setting Function of Auxiliary Function Output in Path Table Operation |
| A02B-0357-R528 | 31i-BP Delay Time Setting Function of Auxiliary Function Output in Path Table Operation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

233

Interpolation Functions

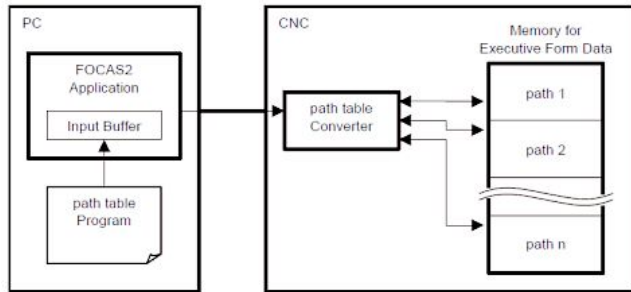

Path Table Direct Conversion Function

Features

When a path table program is being executed on the machine, the Path Table Direct Conversion function can directly convert a path table program into another machining process.

It is not necessary to convert all path table programs for all planned machining process before the start of the operation; incremental path table programs can be converted at the same time the machining takes place. This reduces set-up time for the machine operation.

In addition, since it is also possible to delete path table program of a process that finished execution, the data memory of the CNC can be used efficiently.

Benefits

- Efficient management of path programs
- Reduction of memory requirement in the CNC
- Increase of machine efficiency and productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-R545 | 30i-B Path Table Operation Edit Support |
| A02B-0326-R545 | 31i-B5 Path Table Operation Edit Support |
| A02B-0327-R545 | 31i-B Path Table Operation Edit Support |
| A02B-0353-R545 | 30i-BP Path Table Operation Edit Support |
| A02B-0356-R545 | 31i-B5P Path Table Operation Edit Support |
| A02B-0357-R545 | 31i-BP Path Table Operation Edit Support |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

234

Interpolation Functions

High-Speed Signal Output Function for Path Table Operation

Features

This function enables to control outputs at a 0.5msec intervals as high-speed signal to the external equipments connected with I/O Link i in Path Table Operation mode.

It is possible to control external equipments at high-speed in parallel to the Path Table Operation with this function.

| Items | Specification |
|-------------------------------------------------|----------------------------------|
| Output cycle | 0.5 msec |
| Number of usable I/O Link i channels | 1 |
| Maximum number of output signals | 64 points in total for all paths |
| Maximum number of simultaneously output signals | 20 points for all paths |

Benefits

- High-speed control of external devices during Path Table Operation
- Possibility to design complex system combining high-speed outputs with complex PTO cycles

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------|
| A02B-0323-R564 | 30i-B High-Speed Signal Output Function for Path Table Operation |
| A02B-0326-R564 | 31i-B5 High-Speed Signal Output Function for Path Table Operation |
| A02B-0327-R564 | 31i-B High-Speed Signal Output Function for Path Table Operation |
| A02B-0353-R564 | 30i-BP High-Speed Signal Output Function for Path Table Operation |
| A02B-0356-R564 | 31i-B5P High-Speed Signal Output Function for Path Table Operation |
| A02B-0357-R564 | 31i-BP High-Speed Signal Output Function for Path Table Operation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

235

Interpolation Functions

Incremental Command for Path Table Operation

Features

In Path Table Operation, reference value or axis position are only specified in absolute commands.

The Incremental Command for Path Table Operation function provides the possibility to specify the reference values and each axis position corresponding to the reference values (time, axis position or spindle position) in incremental commands.

Benefits

- Possibility to change the mode of definition of the table
- Increases programming flexibility
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R580 | 30i-B Path Table Operation Time Compensation |
| A02B-0326-R580 | 31i-B5 Path Table Operation Time Compensation |
| A02B-0327-R580 | 31i-B Path Table Operation Time Compensation |
| A02B-0353-R580 | 30i-BP Path Table Operation Time Compensation |
| A02B-0356-R580 | 31i-B5P Path Table Operation Time Compensation |
| A02B-0357-R580 | 31i-BP Path Table Operation Time Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

236

Interpolation Functions

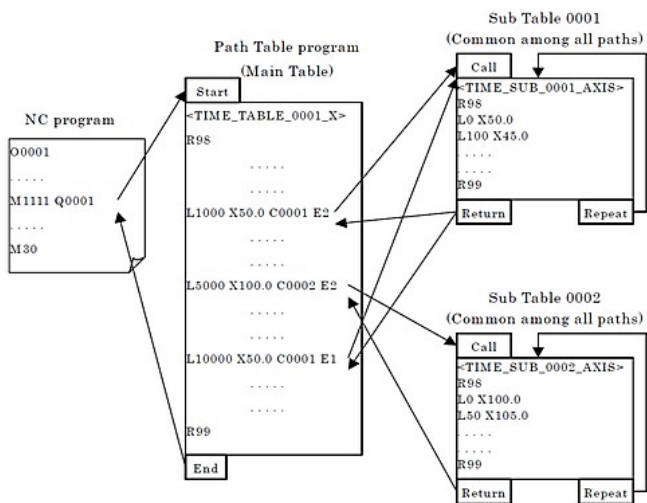

Sub-Table Call for Path Table Operation

Features

When the same shape is machined repeatedly in Path Table Operation (PTO), it can be separated as a Sub Table by this function.

A Sub Table can be called from Path Table programs (Main Table) in arbitrary paths. Moreover, it is possible to execute the same Sub Table repeatedly by specifying the repeat count when the Sub Table is called.

The function simplifies the way Path Table programs are made and also reduces the memory usage allocated to Path Table programs.

Benefits

- Reduction of the memory usage allocated to Path Tables
- Simplifies the programming of repetitive operations
- Increase of the flexibility of Path Table Operation for complex systems
- Increase of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R618 | 30i-B Path Table Operation - Table Expansion |
| A02B-0326-R618 | 31i-B5 Path Table Operation - Table Expansion |
| A02B-0327-R618 | 31i-B Path Table Operation - Table Expansion |
| A02B-0353-R618 | 30i-BP Path Table Operation - Table Expansion |
| A02B-0356-R618 | 31i-B5P Path Table Operation - Table Expansion |
| A02B-0357-R618 | 31i-BP Path Table Operation - Table Expansion |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

237

Interpolation Functions

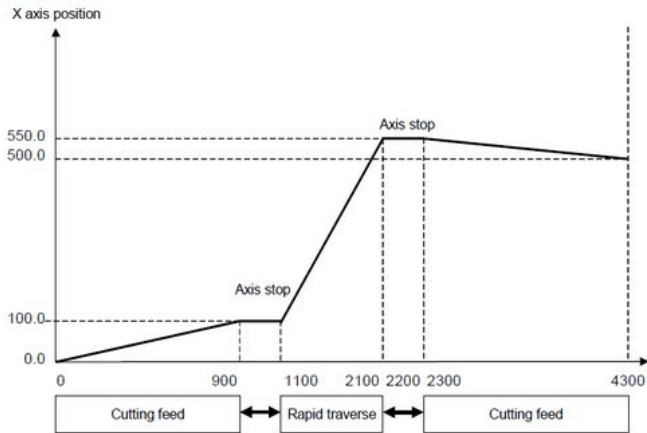

Cutting / Rapid Switching Function for Path Table Operation

Features

In a regular NC program, separate parameters can be used to define cutting feed and rapid traverse. The parameters are switched according to the state of cutting feed / rapid traverse.

In the standard Path Table Operation (PTO) mode, parameters cannot be switched between cutting feed and rapid traverse since only one cutting feed is supported.

In Path Table Operation mode, this function enables a switching between cutting feed and rapid traverse.

In path table operation, parameters such as backlash compensation can be switched because this function enables switching between cutting feed and rapid traverse. Both high-accuracy in cutting feed and high-speed in rapid traverse can be achieved as a consequence of an optimal parameter settings.

Cutting feed is specified by R60 command, and rapid traverse is specified by R61 command.

Example of program

```
TIME_TABLE_0001_X  
R98;  
L0 X0.0;  
L900 X100.0;  
L1100 X100.0 R61;  
L2100 X550.0;  
L2300 X550.0 R60;  
L4300 X500.0;  
:  
R99;
```

Benefits

- Higher accuracy in Path Table Operation mode
- Decrease of the cycle time in Path Table Operation
- Overall increase of the productivity

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-R668 | 30i-B Path Table Operation Axis Control Expansion |
| A02B-0326-R668 | 31i-B5 Path Table Operation Axis Control Expansion |
| A02B-0327-R668 | 31i-B Path Table Operation Axis Control Expansion |
| A02B-0353-R668 | 30i-BP Path Table Operation Axis Control Expansion |
| A02B-0356-R668 | 31i-B5P Path Table Operation Axis Control Expansion |
| A02B-0357-R668 | 31i-BP Path Table Operation Axis Control Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

239

Interpolation Functions

Path Table Operation Execution Data Size 20Mbyte

Features

This function expands the DRAM area size which stores the data for path table operation from 7 MB to 20 MB. This allows the operation of large path table programs.

Benefits

- Expands the application range of the path table operation function

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------|
| A02B-0323-R727 | 30i-B Path Table Operation Execution Data Size 20 MB |
| A02B-0326-R727 | 31i-B5 Path Table Operation Execution Data Size 20 MB |
| A02B-0327-R727 | 31i-B Path Table Operation Execution Data Size 20 MB |
| A02B-0353-R727 | 30i-BP Path Table Operation Execution Data Size 20 MB |
| A02B-0356-R727 | 31i-B5P Path Table Operation Execution Data Size 20 MB |
| A02B-0357-R727 | 31i-BP Path Table Operation Execution Data Size 20 MB |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

241

Interpolation Functions

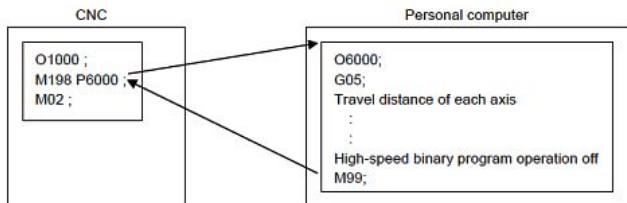

High-Speed Binary Program Operation

Features

The high-speed binary program operation is the function to execute an external program written in binary format and stored on an external device (Data Server or a Personal Computer connected to the CNC via HSSB).

DNC operation or external subprogram call (M198) can be used to use the function.

The number of axes, paths and the execution time depend on the CNC type and configuration. Refer to the function manual for additional information.

Benefits

- Provides the capability to execute binary programs
- Possibility to transfer complex shapes and programs with high-speed to the CNC
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0323-R516 | 30i-B High-Speed Binary Mode Function (only 1 Path) |
| A02B-0326-R516 | 31i-B5 High-Speed Binary Mode Function (only 1 Path) |
| A02B-0327-R516 | 31i-B High-Speed Binary Mode Function (only 1 Path) |
| A02B-0353-R516 | 30i-BP High-Speed Binary Program Operation |
| A02B-0356-R516 | 31i-B5P High-Speed Binary Program Operation |
| A02B-0357-R516 | 31i-BP High-Speed Binary Program Operation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

242

Interpolation Functions

High-Speed Binary Program Operation on 2-Path Control

Features

This function allows to execute the high-speed binary program operation on 2 paths. It is possible to start the high-speed binary program operation on both paths at the same time.

Benefits

- Expands the application range of the high-speed binary program operation function

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------|
| A02B-0323-S814 | 30i-B High-Speed Binary Program Operation on 2-Path Control |
| A02B-0326-S814 | 31i-B5 High-Speed Binary Program Operation on 2-Path Control |
| A02B-0327-S814 | 31i-B High-Speed Binary Program Operation on 2-Path Control |
| A02B-0353-S814 | 30i-BP High-Speed Binary Program Operation on 2-Path Control |
| A02B-0356-S814 | 31i-B5P High-Speed Binary Program Operation on 2-Path Control |
| A02B-0357-S814 | 31i-BP High-Speed Binary Program Operation on 2-Path Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

243

Interpolation Functions

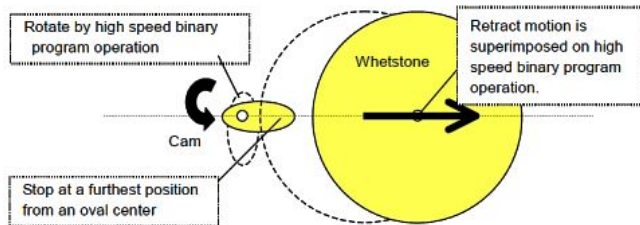

High-Speed Binary Program Operation Retract Function

Features

This function allows, in case of sudden and unexpected machine problem, to stop the machining process safely during the execution of high-speed binary program.

The retract operation is done on each axis when the retract signal is received during execution of the high speed binary program operation; it forces the high speed binary program operation to stop with a controlled deceleration. After this, the program is reset after retraction.

Benefits

- Provides the capability to stop safely and smoothly a high-speed binary operation
- Improves the protection of tools and fixtures
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0323-S658 | 30i-B High-Speed Binary Program Operation Retract Function |
| A02B-0326-S658 | 31i-B5 High-Speed Binary Program Operation Retract Function |
| A02B-0327-S658 | 31i-B High-Speed Binary Program Operation Retract Function |
| A02B-0353-S658 | 30i-BP High-Speed Binary Program Operation Retract Function |
| A02B-0356-S658 | 31i-B5P High-Speed Binary Program Operation Retract Function |
| A02B-0357-S658 | 31i-BP High-Speed Binary Program Operation Retract Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

244

Interpolation Functions

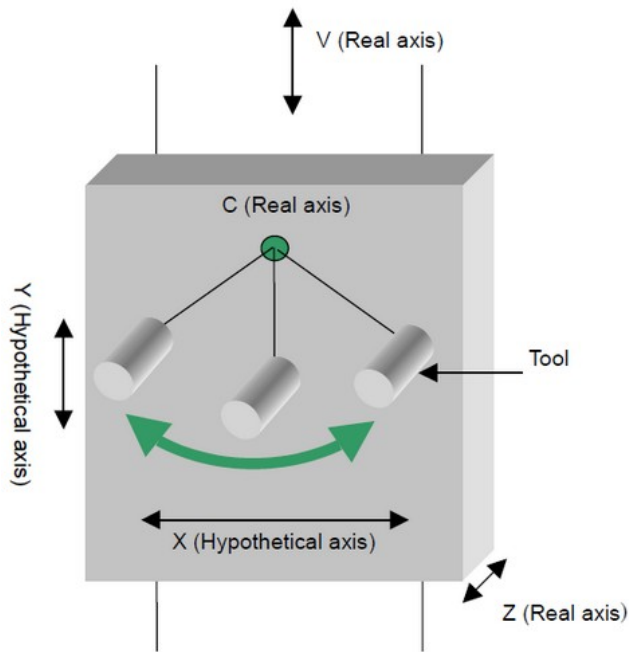

Hypothetical Linear Axis Interpolation

Features

With the Hypothetical Linear Axis Interpolation function, a machine having two linear axes and one rotary axis can be controlled as a normal X-Y-Z axes machine.

In this case, 3-dimensional positioning and interpolation functions are available. The linear axis not having a real axis becomes a hypothetical axis and it is necessary that hypothetical axis is set as one of CNC controlled axes.

Example

On the figure, the machine pictured needs two hypothetical axes and three real axes, so the number of CNC control axes is five. X-Y-Z command in direct coordinate is available in the hypothetical axis command mode and the command for the real axis, for example V-Z-C command, is available in real axis command mode.

The hypothetical axis command mode signal IMMD provides the possibility to switch between the hypothetical axis command mode and real axis command mode. Both modes are effective in both automatic operation mode and manual mode. The rotation axis cannot be set to Cs contouring control axis.

Benefits

- Simplifies the programming of complex machine configuration
- Overall increase of the machine productivity and efficiency

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-S968 | 30i-B Hypothetical Linear Axis Control Function |
| A02B-0326-S968 | 31i-B5 Hypothetical Linear Axis Control Function |
| A02B-0327-S968 | 31i-B Hypothetical Linear Axis Control Function |
| A02B-0328-S968 | 32i-B Hypothetical Linear Axis Control |
| A02B-0353-S968 | 30i-BP Hypothetical Linear Axis Control |
| A02B-0356-S968 | 31i-B5P Hypothetical Linear Axis Control |
| A02B-0357-S968 | 31i-BP Hypothetical Linear Axis Control |
| A02B-0358-S968 | 32i-BP Hypothetical Linear Axis Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

245

Interpolation Functions

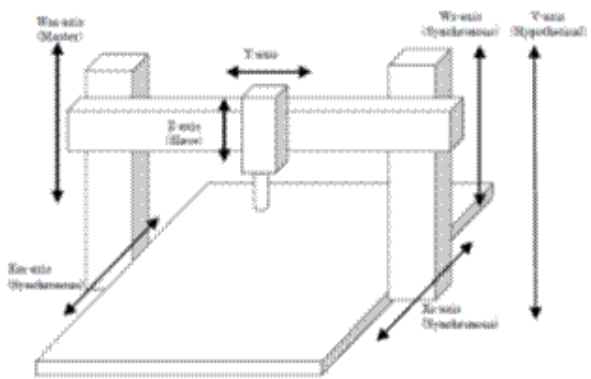


Fig. 3.1 (a) Example of machine structure

Cross Rail Axis Control

Features

This function controls two parallel axes, coupled directly (e.g. telescopic axis) or indirectly (e.g. via cross rail). Such architecture is controlled by a single axis command.

Benefits

- Support of special axes architectures comprising two linked, parallel axes.
- Easy Programming by single axis command
- Supports most features including 5-axis features
- This function cannot be specified together with Parallel Axis Control (-R509)

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-R415 | 30i-B Cross Rail Axis Control |
| A02B-0326-R415 | 31i-B5 Cross Rail Axis Control |
| A02B-0327-R415 | 31i-B Cross Rail Axis Control |
| A02B-0353-R415 | 30i-BP Cross Rail Axis Control |
| A02B-0356-R415 | 31i-B5P Cross Rail Axis Control |
| A02B-0357-R415 | 31i-BP Cross Rail Axis Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

247

Interpolation Functions

Path Table Operation Execution Format Data Capacity 60MB

Features

This option expands the size of the DRAM area that stores Path Table Execution data from 7 MB to 60MB. This allows the operation of large path table programs, especially for high precision parts.

This option is only available on CPU Card G.

Benefits

- Expands the application range of the path table operation function

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0353-R081 | 30i-BP Path Table Operation Execution Format Data Capacity 60MB |
| A02B-0356-R081 | 31i-B5P Path Table Operation Execution Format Data Capacity 60MB |
| A02B-0357-R081 | 31i-BP Path Table Operation Execution Format Data Capacity 60MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

248

Functions

Feed Functions

This section of the catalogue contains the functions related to the CNC motion (feed functions) enabling the control of the movement of the axes in the machine.

Feed functions, like Advanced Preview Control, AI Contour Control I and II provide high-speed contouring capabilities. Acceleration / deceleration options protect the machine from the shocks of sudden starts and stops. They work in concert with the AI Contour Control functions to provide high-speed, high-precision machining capabilities.


Some of the feed functions detailed in the catalogue:

- Optimum torque acceleration / deceleration
- Positioning by optimum acceleration
- Bell-shaped acc / dec after cutting feed interpolation
- Advanced Preview Control
- AI Contour Control
- High Speed Processing
- Jerk Control
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

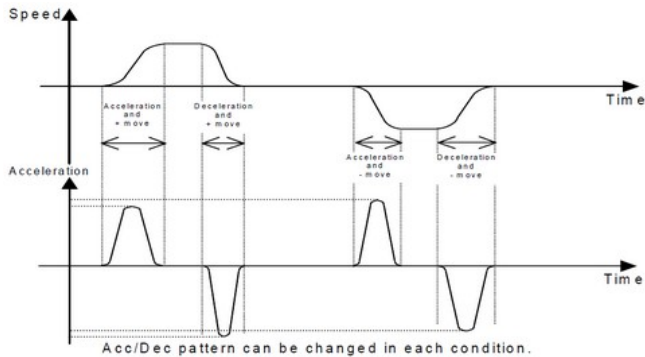

Optimum Torque Acceleration/Deceleration

Features

This Optimum Torque Acceleration / Deceleration function enables optimal Rapid Traverse acceleration / deceleration during AI Contour Control I (AICC-I), AI Contour Control II (AICC-II), AI High Precision Contour Control (AI HPCC) and AI Nano High Precision Contour Control (AI Nano HPCC) modes.

The machine axis friction, gravity, and servomotor characteristics all have an impact on the acceleration / deceleration performance of each machine axis. In addition, the servomotor torque required for axis acceleration / deceleration differs according to the axis movement direction and whether the axis is accelerating or decelerating.

With this function, it is possible to set appropriate CNC parameters defining individual axis direction-dependant acceleration and deceleration limits. During AICC-I, AICC-II, AI HPCC and AI NANO HPCC modes, the CNC automatically optimizes the rapid traverse acceleration and deceleration rates in accordance to these parameters settings, and the current direction and acceleration mode of the machine axes. The Optimum Torque Acceleration/ Deceleration function optimizes the capability of each motor / axis performance resulting in faster axis positioning (rapid traverse) and reduced overall cycle time.

Benefits

- Optimization of the rapid traverse performance of each axis
- Reduction of the axis positioning time and overall machining time.
- Overall improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-S675 | 30i-B Optimum Torque Acceleration/Deceleration. |
| A02B-0326-S675 | 31i-B5 Optimum Torque Acceleration/Deceleration. |
| A02B-0327-S675 | 31i-B Optimum Torque Acceleration/Deceleration. |
| A02B-0328-S675 | 32i-B Optimum Torque Acceleration/Deceleration. |
| A02B-0339-S675 | 0i-TF Optimum Torque Acceleration / Deceleration |
| A02B-0340-S675 | 0i-MF Optimum Torque AccelerationDeceleration |
| A02B-0349-S675 | 0i-TFP Optimum Torque Acceleration / Deceleration |
| A02B-0350-S675 | 0i-MFP Optimum Torque Acceleration / Deceleration |
| A02B-0353-S675 | 30i-BP Optimum Torques Acceleration / Deceleration |
| A02B-0356-S675 | 31i-B5P Optimum Torques Acceleration / Deceleration |
| A02B-0357-S675 | 31i-BP Optimum Torques Acceleration / Deceleration |
| A02B-0358-S675 | 32i-BP Optimum Torques Acceleration / Deceleration |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

250

Feed Functions

Positioning by Optimum Acceleration

Features

When a rapid traverse command is specified during automatic operation, the Positioning by Optimum Acceleration function can be used to adjust the rapid traverse rate, time constant, and loop gain, according to the amount of travel for the block.

This reduces the time required for positioning and position check, therefore reducing the overall cycle time.

This function is a basic function in FANUC Series 0i-PF.

Benefits

- Optimization of rapid traverse (G00) positioning
- Reduction of machining cycle time
- Improvement of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-J693 | 30i-B Positioning by Optimal Acceleration |
| A02B-0326-J693 | 31i-B5 Positioning by Optimal Acceleration |
| A02B-0327-J693 | 31i-B Positioning by Optimal Acceleration |
| A02B-0328-J693 | 32i-B Positioning by Optimal Acceleration |
| A02B-0333-J693 | 35i-B Positioning by Optimal Acceleration |
| A02B-0334-J693 | PM i-A Positioning by Optimal Acceleration |
| A02B-0339-J693 | 0i-TF Positioning by Optimum Acceleration |
| A02B-0340-J693 | 0i-MF Positioning by Optimum Acceleration |
| A02B-0349-J693 | 0i-TFP Positioning by Optimum Acceleration |
| A02B-0350-J693 | 0i-MFP Positioning by Optimum Acceleration |
| A02B-0353-J693 | 30i-BP Position by Optimum Acceleration |
| A02B-0356-J693 | 31i-B5P Position by Optimum Acceleration |
| A02B-0357-J693 | 31i-BP Position by Optimum Acceleration |
| A02B-0358-J693 | 32i-BP Position by Optimum Acceleration |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

251

Feed Functions

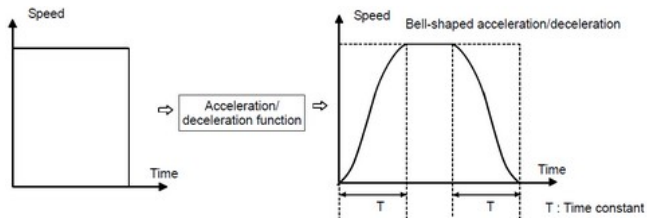

Bell-Shaped Acc./Dec. After Cutting Feed Interpolation

Features

The Bell-Shaped Acceleration / Deceleration after Cutting Feed Interpolation function is using bell-shaped cutting feedrate acceleration and deceleration profiles to reduce shock to the machine tool structure; it helps to eliminate vibration at the machine cutting point.

When applying bell-shaped acceleration, for a given acceleration rate, the overall time to accelerate to the programmed feedrate is generally shorter as compared to using the alternative linear or exponential acceleration profiles.

Any axes velocity changes (acc/dec) are applied AFTER the CNC has calculated the necessary velocity commands required for axes positioning.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Improvement of the surface finish
- Reduction of shock to the machine tool and any consequential disturbance at the machine cutting point.
- Reduction of overall acceleration times compared to the equivalent linear or exponential acceleration profile.
- Reduction of position error due to servo delay compared to the equivalent exponential acceleration profile.
- Improvement of the machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------|
| A02B-0323-J829 | 30i-B Bell-Shaped Acceleration/Deceleration after Cutting Feed Interpolation |
| A02B-0326-J829 | 31i-B5 Bell-Shaped Acceleration/Deceleration after Cutting Feed Interpolation |
| A02B-0327-J829 | 31i-B Bell-Shaped Acceleration/Deceleration after Cutting Feed Interpolation |
| A02B-0328-J829 | 32i-B Bell-Shaped Acceleration/Deceleration after Cutting Feed Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

252

Feed Functions

2nd Feedrate Override

Features

The Second Feedrate Override function allows cutting feedrates that have been overridden once to be overridden a second time.

The override is done in a percentage from 0 to 254% in increments of 1%. The value is set from the PMC. No override can be performed on functions such as threading and tapping in which override is inhibited. This function is used for controlling feedrate in adaptive control, etc.

Benefits

- Adds additional override capabilities to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-J810 | 30i-B 2nd Feedrate Override |
| A02B-0326-J810 | 31i-B5 2nd Feedrate Override |
| A02B-0327-J810 | 31i-B 2nd Feedrate Override |
| A02B-0328-J810 | 32i-B 2nd Feedrate Override |
| A02B-0333-J810 | 35i-B 2nd Feedrate Override |
| A02B-0339-J810 | 0i-TF 2nd Feedrate Override |
| A02B-0340-J810 | 0i-MF 2nd Feedrate Override |
| A02B-0349-J810 | 0i-TFP 2nd Feedrate Override |
| A02B-0350-J810 | 0i-MFP 2nd Feedrate Override |
| A02B-0353-J810 | 30i-BP 2nd Feedrate Override |
| A02B-0356-J810 | 31i-B5P 2nd Feedrate Override |
| A02B-0357-J810 | 31i-BP 2nd Feedrate Override |
| A02B-0358-J810 | 32i-BP 2nd Feedrate Override |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

253

Feed Functions

High-Speed Feedrate Override

Features

This function allows to apply a feedrate override with an accelerated response. The CNC reads the high-speed feedrate override signals directly from the machine side without using the PMC. This function is useful for applications that demand a quick response, e.g. press machines.

Benefits

- Improves the response time to feedrate change commands

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0333-R536 | 35i-B High-Speed Feedrate Override |
| A02B-0334-R536 | PM i-A High-Speed Feedrate Override |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

254

Feed Functions

One-Digit F-Code Feed

Features

The One-Digit F-Code Feed function provides the ability to preset 9 feed rates that are stored in parameters and activated by programming F1 through F9.

The feed rate corresponding to the specified number is set. When F0 is commanded, rapid traverse rate is set. If the manual pulse generator is rotated with the one-digit F code feed selection signal set to 1, the feed rate corresponding to the currently selected number is increased or decreased. A set or modified feed rate is preserved while the power is turned off.

The current feed rate is displayed on the screen.

This function is a basic function in FANUC Series 0i-MF (Type 1, Type 3), 0i-MF Plus (Type 0, 1 and 3) and 0i-LF Plus.

Benefits

- Adds preset capabilities to manage/control easily feedrates sets to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J820 | 30i-B F1 Digit Feed |
| A02B-0326-J820 | 31i-B5 F1 Digit Feed |
| A02B-0327-J820 | 31i-B F1 Digit Feed |
| A02B-0328-J820 | 32i-B F1 Digit Feed |
| A02B-0350-J820 | 0i-MFP One-Digit F-Code Feed |
| A02B-0353-J820 | 30i-BP F1-Ddigit Feed |
| A02B-0356-J820 | 31i-B5P F1-Ddigit Feed |
| A02B-0357-J820 | 31i-BP F1-Digit Feed |
| A02B-0358-J820 | 32i-BP F1-Digit Feed |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

255

Feed Functions

Inverse Time Feed

Features

The G code for inverse time feed is a modal G code and belongs to group 05 (includes G code for feed per revolution and G code for feed per minute). The Inverse Time Feed function (G93 mode) allows the feedrate of the tool to be specified by the move distance of the block and inverse time (FRN) where:

- Linear interpolation (G01)
FRN=1/Time (min) = Speed/Distance
Speed: mm/ min (metric input), inch/ min (inch input)
Distance: mm (metric input), inch (inch input)
- Circular interpolation (G02, G03)
FRN=1/Time (min) = Speed/Circle radius
Speed: mm/ min (metric input), inch/ min (inch input)
Circle radius: mm (metric input), inch (inch input)

This function is a basic function in FANUC Series 0i-MF (Type 1) and 0i-MF Plus (Type 0, Type 1).

Benefits

- Adds inverse time capabilities to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0323-J715 | 30i-B Inverse Time Feed |
| A02B-0326-J715 | 31i-B5 Inverse Time Feed |
| A02B-0327-J715 | 31i-B Inverse Time Feed |
| A02B-0328-J715 | 32i-B Inverse Time Feed |
| A02B-0350-J715 | 0i-MFP Inverse Time Feed |
| A02B-0353-J715 | 30i-BP Invers Time Feed |
| A02B-0356-J715 | 31i-B5P Invers Time Feed |
| A02B-0357-J715 | 31i-BP Invers Time Feed |
| A02B-0358-J715 | 32i-BP Invers Time Feed |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

256


Feed Functions

Rate Feed

Features

This function enables to continually increase / decrease (linear) the feedrate within a block. While considering the feedrate of the previous block as the start value and specifying the value of the feedrate at the end of the block, the feedrate is changed linearly from start value to the end value within the block commanded.

Example of application


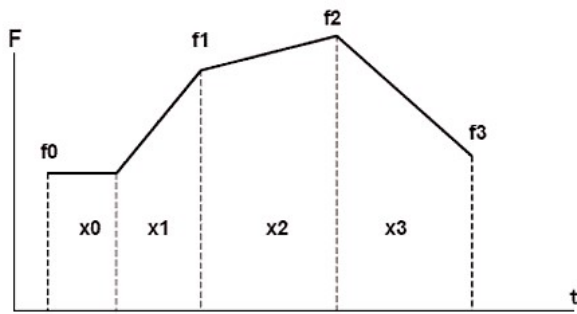


```
N10 G01 Xx0 Ff0 ;  
N20 G93.2 Xx1 Ff1 ;  
N30 Xx2 Ff2 ;  
N40 Xx3 Ff3 ;
```

with Rate Feed Function



without Rate Feed Function

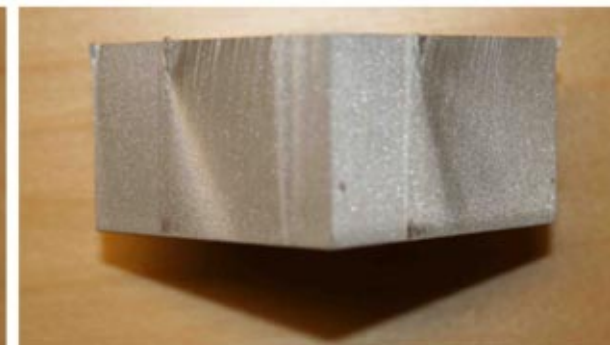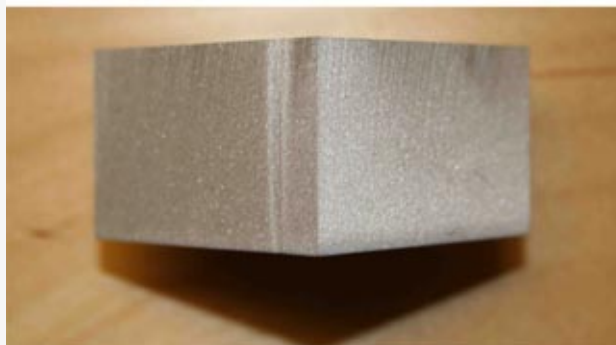

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

On water jet cutting machines, the water jet following error is essential to smoothly adjust the feedrate / to take corners and thus improve the cutting behaviour. Without this function it would be necessary to command a lot of tiny blocks to adapt the feedrate profile as needed.

Benefits

- Possibility to program continuously smooth speed characteristics depending on the curvature of the workpiece to be machined
- Improvement of the cutting behaviour for water jet applications
- Improvement of the slide motion resulting in better part quality for press forming applications
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-R635 | 30i-B Rate Feed Function |
| A02B-0326-R635 | 31i-B5 Rate Feed Function |
| A02B-0327-R635 | 31i-B Rate Feed Function |
| A02B-0328-R635 | 32i-B Rate Feed Function |
| A02B-0353-R635 | 30i-BP Rate Feed Function |
| A02B-0356-R635 | 31i-B5P Rate Feed Function |
| A02B-0357-R635 | 31i-BP Rate Feed Function |
| A02B-0358-R635 | 32i-BP Rate Feed Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

258

Feed Functions

External Deceleration

Features

The External Deceleration function provides the ability for the PMC to decelerate a controlled axis.

The feed rate is decelerated by external deceleration signals from the machine. The deceleration rate is set by parameters. External deceleration signals are provided for each axis and direction. Three types of deceleration condition settings can be dynamically selected by the PMC.

External deceleration can be applied to the rapid traverse rate, cutting feed rate, and manual handle feed rate.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Addition of controlled deceleration profiles to the CNC
- Simplifies programming
- Improves overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J842 | 30i-B External Deceleration |
| A02B-0326-J842 | 31i-B5 External Deceleration |
| A02B-0327-J842 | 31i-B External Deceleration |
| A02B-0328-J842 | 32i-B External Deceleration |
| A02B-0333-J842 | 35i-B External Deceleration |
| A02B-0334-J842 | PM i-A External Deceleration |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

259

Feed Functions

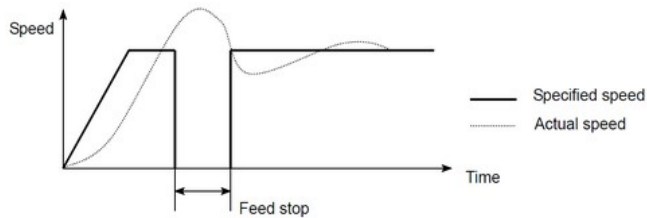

Feed Stop

Features

The Feed Stop function can avoid shocks to the machine, caused by the overshoot of a large servo motor accelerating in rapid traverse mode.

During axis motion, the feed stop function checks a position deviation amount continuously. When the amount exceeds the "feed stop position deviation amount", the function suspends pulse distribution and acceleration / deceleration control during such a period of time, and terminates the move command for the positioning control circuit.

Thus the function can minimize any overshoot that may occur with a large servo motor in rapid traverse acceleration operation.

Benefits

- Reduction of the shocks to machine and process
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-J847 | 30i-B Feed Stop |
| A02B-0326-J847 | 31i-B5 Feed Stop |
| A02B-0327-J847 | 31i-B Feed Stop |
| A02B-0328-J847 | 32i-B Feed Stop |
| A02B-0353-J847 | 30i-BP Feed Stop Function |
| A02B-0356-J847 | 31i-B5P Feed Stop Function |
| A02B-0357-J847 | 31i-BP Feed Stop Function |
| A02B-0358-J847 | 32i-BP Feed Stop Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

260

Feed Functions

Speed Control with Acceleration in Circular Interpolation

Features

When high-speed cutting is performed in circular, helical or spiral interpolation, the actual tool path has an error with respect to the programmed path.

The feedrate of circular interpolation is automatically clamped by the permissible acceleration specified by the parameter for decreasing the shape error of radius direction.

This function is a basic function in FANUC Series 0i-MF and 0i-PF. It is included in AI Contour Control I or II in Series 0i-TF.

Benefits

- Diminution of the tool-path error in circular, helical and spiral interpolation
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-J809 | 30i-B Speed Control with Acceleration in Circular Interpolation |
| A02B-0326-J809 | 31i-B5 Speed Control with Acceleration in Circular Interpolation |
| A02B-0327-J809 | 31i-B Speed Control with Acceleration in Circular Interpolation |
| A02B-0328-J809 | 32i-B Speed Control with Acceleration in Circular Interpolation |
| A02B-0334-J809 | PM i-A Speed Control with Acceleration in Circular Interpolation |
| A02B-0353-J809 | 30i-BP Speed Control with Acceleration in Circular Interpolation |
| A02B-0356-J809 | 31i-B5P Speed Control with Acceleration in Circular Interpolation |
| A02B-0357-J809 | 31i-BP Speed Control with Acceleration in Circular Interpolation |
| A02B-0358-J809 | 32i-BP Speed Control with Acceleration in Circular Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

261

Feed Functions

Advanced Preview Control

Features

The Advanced Preview Control function is designed for high-speed precise machining. With this function, the delay due to acceleration / deceleration and the delay in the servo system that increases as the feed rate becomes higher can be suppressed.

The tool can then follow specified values accurately and errors in the machining profile can be reduced. In advanced preview control mode, the following functions are available:

- Linear acceleration / deceleration before interpolation
- Automatic corner deceleration function

This function is a basic function in FANUC Series 0i-MF and 0i-PF.

Benefits

- Optimization of the machining speed using smooth acceleration / deceleration to minimize axis-overshoot errors.
- Decrease of the part-form tolerances suppressing acceleration / deceleration delays and servo lag
- Elimination of corner-clipping errors that typically increase as the feedrate increases

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0333-R678 | 35i-B Advanced Preview Control |
| A02B-0334-R678 | PM i-A Advanced Preview Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

262

Feed Functions

AI Contour Control I

Features

AI Contour Control I⁺ (AICC-I⁺) is used to realize high-precision machining at optimal machining speeds. This function suppresses path errors due to acceleration/deceleration delay, servo positioning delay, and mechanical and electro-mechanical machine performance constraints.

Without this function machining profile errors would increase proportionally with the programmed path feedrate.

In practice, this function is useful when cutting on complex part forms involving sudden cutter direction changes such as are found in die/mold machining.

Benefits

- Optimization of the machining speeds using smooth acceleration / deceleration to minimize axis-overshoot errors.
- Decrease of the part-form tolerances suppressing acceleration / deceleration delays and servo lag
- Elimination of corner-clipping errors that typically increase as the feedrate increases

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-S807 | 30i-B AI Contour Control I - Includes 30 Look-Ahead Blocks |
| A02B-0326-S807 | 31i-B5 AI Contour Control I - Includes 30 Look-Ahead Blocks |
| A02B-0327-S807 | 31i-B AI Contour Control I - Includes 30 Look-Ahead Blocks |
| A02B-0328-S807 | 32i-B AI Contour Control I - Includes 30 Look-Ahead Blocks |
| A02B-0339-J665 | 0i-TF AI Contour Control I |
| A02B-0340-J665 | 0i-MF AI Contour Control I |
| A02B-0349-J665 | 0i-TFP AI Contour Control I |
| A02B-0353-S807 | 30i-BP AI Contour Control I (AICC I) |
| A02B-0356-S807 | 31i-B5P AI Contour Control I (AICC I) |
| A02B-0357-S807 | 31i-BP AI Contour Control I (AICC I) |
| A02B-0358-S807 | 32i-BP AI Contour Control I (AICC I) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

263

Feed Functions

AI Contour Control II

Features

AI Contour Control II⁺ is used to enable high-precision machining at optimal machining speeds. This function suppresses path errors due to acceleration / deceleration delay, servo positioning delay, and mechanical and electro-mechanical machine performance constraints.

Without this function, machining profile errors would increase proportionally with the programmed path feedrate. In practice, this function is useful when cutting on complex part forms involving sudden cutter direction changes such as are found in die / mold machining.

This function is a basic function in FANUC Series 0i-MF Plus (Type 0, 1 and 3) and 0i-LF Plus.

Benefits

- Optimization of machining speeds using smooth acceleration / deceleration to minimize axis-overshoot errors
- Decrease of part-form tolerances suppressing acceleration / deceleration delays and servo lag
- Elimination of corner-clipping errors that typically increase as the feedrate increases.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------------|
| A02B-0323-S808 | 30i-B AI Contour Control II - Includes 200 Look-Ahead Blocks |
| A02B-0326-S808 | 31i-B5 AI Contour Control II - Includes 200 Look-Ahead Blocks (30 -> 200 Blocks) |
| A02B-0327-S808 | 31i-B AI Contour Control II - Includes 200 Look-Ahead Blocks (30 -> 200 Blocks) |
| A02B-0328-S808 | 32i-B AI Contour Control II - Includes 200 Look-Ahead Blocks |
| A02B-0339-S808 | 0i-TF AI Contour Control II |
| A02B-0340-S808 | 0i-MF AI Contour Control II |
| A02B-0349-S808 | 0i-TFP AI Contour Control II |
| A02B-0353-S808 | 30i-BP AI Contour Control II (AICC II) |
| A02B-0356-S808 | 31i-B5P AI Contour Control II (AICC II) |
| A02B-0357-S808 | 31i-BP AI Contour Control II (AICC II) |
| A02B-0358-S808 | 32i-BP AI Contour Control II (AICC II) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

264

Feed Functions

Look-Ahead Blocks Expansion of AICC II

Features

This function expands the number of look-ahead blocks for AI contour control II from 200 blocks to 400 blocks. This function cannot be specified together with the high-speed processing option.

Benefits

- Enables high-precision machining on cutting complex part-forms that are defined by many, tiny, program blocks such as are found in die/mold machining.
- The more look-ahead blocks the control can preview, the greater the chance it has of predicting a cutter direction change.

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------------------------------------------------------|
| A02B-0323-R468 | 30i-B Look-Ahead Blocks Expansion of AI Contour Control II - Expands Look-Ahead Blocks from 200 Blocks to 400 Blocks |
| A02B-0326-R468 | 31i-B5 Look-Ahead Blocks Expansion of AI Contour Control II - Expands Look-Ahead Blocks from 200 Blocks to 400 Blocks |
| A02B-0327-R468 | 31i-B Look-Ahead Blocks Expansion of AI Contour Control II - Expands Look-Ahead Blocks from 200 Blocks to 400 Blocks |
| A02B-0328-R468 | 32i-B Look-Ahead Blocks Expansion of AI Contour Control II - Expands Look-Ahead Blocks from 200 Blocks to 400 Blocks |
| A02B-0353-R468 | 30i-BP Look-Ahead Blocks Expansion of AI Contour Control II |
| A02B-0356-R468 | 31i-B5P Look-Ahead Blocks Expansion of AI Contour Control II |
| A02B-0357-R468 | 31i-BP Look-Ahead Blocks Expansion of AI Contour Control II |
| A02B-0358-R468 | 32i-BP Look-Ahead Blocks Expansion of AI Contour Control II |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

265

Feed Functions

Maximum Look-Ahead Blocks 400

Features

This option expands the number of look-ahead blocks for AI contour control II from 200 blocks to 400 blocks. This option is only applicable to FANUC 0i-MF series.

Benefits

- Enables high-precision machining on cutting complex part-forms that are defined by many, tiny, program blocks such as are found in die/mold machining.
- The more look-ahead blocks the control can preview, the greater the chance it has of predicting a cutter direction change.
- In a 2-path system, the number of look-ahead blocks is 400 blocks in path 1 and 5 blocks in path 2

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0340-R386 | 0i-MF Look-Ahead Blocks 400 |
| A02B-0350-R386 | 0i-MFP Look-Ahead Blocks 400 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

266

Feed Functions

High-Speed Processing

Features

The High-Speed Processing function improves both the CNC Block Processing Time and the NC block look-ahead capability of the option AI Contour Control II.

Benefits

- Enables higher precision machining of complex free-form surfaces described by minute micro-block moves.
- Optimization of the machining speed of complex free-form surfaces described by minute micro-block moves.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------------------------------|
| A02B-0323-S809 | 30i-B High-Speed Processing - Includes Look-Ahead Blocks Expansion - from 200 Blocks to 600 Blocks |
| A02B-0326-S809 | 31i-B5 High-Speed Processing - Includes 600 Look-Ahead Blocks (200 -> 600 Blocks) |
| A02B-0327-S809 | 31i-B High-Speed Processing - Includes 600 Look-Ahead Blocks (200 -> 600 Blocks) |
| A02B-0328-S809 | 32i-B High-Speed Processing - Includes Look-Ahead Blocks Expansion - from 200 Blocks to 600 Blocks |
| A02B-0353-S809 | 30i-BP High-Speed Processing |
| A02B-0356-S809 | 31i-B5P High-Speed Processing |
| A02B-0357-S809 | 31i-BP High-Speed Processing |
| A02B-0358-S809 | 32i-BP High-Speed Processing |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

267

Feed Functions

Look-Ahead Blocks Expansion

Features

When performing High-Speed Processing with AI Contour Control II, this function expands the CNC look-ahead capability to 1,000 CNC Part Program Blocks.

Benefits

- Enables a higher-precision machining on cutting complex part-forms that are defined by many, tiny, program blocks such as are found in die/mold machining.
- The more look-ahead blocks the control can preview, the greater the chance it has of predicting a cutter direction change.

Ordering Information


| Specification | Description |
|----------------|--------------------------------------------------------------------------------------------------------|
| A02B-0323-S815 | 30i-B Look-Ahead Blocks Expansion - Expands Number of Look-Ahead Blocks from 600 Blocks to 1000 Blocks |
| A02B-0326-S815 | 31i-B5 Look-Ahead Blocks Expansion - Expands Look-Ahead Blocks from 600 to 1000 Blocks |
| A02B-0327-S815 | 31i-B Look-Ahead Blocks Expansion - Expands Look-Ahead Blocks from 600 to 1000 Blocks |
| A02B-0353-S815 | 30i-BP Look-Ahead Blocks Expansion |
| A02B-0356-S815 | 31i-B5P Look-Ahead Blocks Expansion |
| A02B-0357-S815 | 31i-BP Look-Ahead Blocks Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Linear interpolation (N1) → circular interpolation (N2)

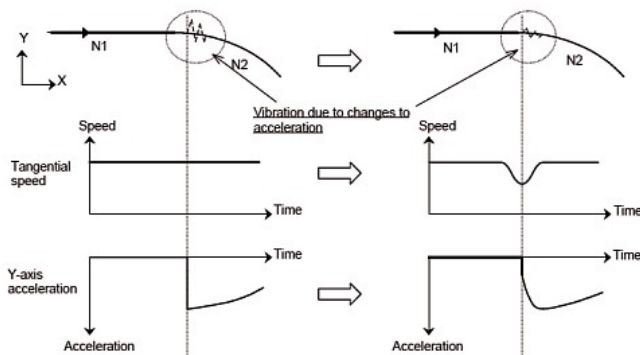**Notice**

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Jerk Control

Features

Whereas the rate-of-change of velocity is referred to as Acceleration, the rate-of-change of acceleration is technically known as Jerk. Jerk is therefore the third derivative of Position, with Acceleration the second and Velocity the first.

Wherever a part program causes a significant change in cutter-path direction, such as in a transition from a straight line to curve, any axis acceleration that is required to maintain a constant cutter-path vector feedrate through that transition may cause vibration or shock to be induced into the machine structure.

The Jerk Control function can be used to reduce shock and any resultant position error from sudden axis acceleration. Jerk Control temporarily modifies the cutter-path vector feedrate by applying a smoothing effect progressively modifying the rate-of-change of acceleration (Jerk).

Without using Jerk Control, Bell-Shaped Acceleration alone would apply a harsher, constant rate-of-change, acceleration profile. The permissible rate-of-change of acceleration (Jerk) is set by CNC parameters for each machine axis; these limits are usually set in advance by the machine-tool-builder. Any velocity adjustments applied by the Jerk Control function are calculated as true positional commands and hence incur only minimal acceleration or deceleration delays (Acc/Dec Before Interpolation).

This function is a basic function in FANUC Series 0i-MF Plus (Type 0, 1 and 3) and 0i-LF Plus.

Benefits

- Reduction of machining errors caused by shock and vibration induced into the machine structure that result of sudden changes in axis acceleration

Ordering Information

| Specification | Description |
|----------------|----------------------|
| A02B-0323-S678 | 30i-B Jerk Control |
| A02B-0326-S678 | 31i-B5 Jerk Control |
| A02B-0327-S678 | 31i-B Jerk Control |
| A02B-0328-S678 | 32i-B Jerk Control |
| A02B-0340-S678 | 0i-MF Jerk Control |
| A02B-0353-S678 | 30i-BP Jerk Control |
| A02B-0356-S678 | 31i-B5P Jerk Control |
| A02B-0357-S678 | 31i-BP Jerk Control |
| A02B-0358-S678 | 32i-BP Jerk Control |

269

Feed Functions

Rigid Tapping Bell-Shaped Acceleration/ Deceleration

Features

Linear acceleration / deceleration and exponential acceleration / deceleration (for milling / M type only) have conventionally been used to realized to rigid tapping.

Using bell shaped acceleration / deceleration enables a machine-friendly tapping. The use of smaller time constants for the tapping cycle is required by the fact that the time required for acceleration / deceleration is shorter than with linear profile.

Since this bell shaped acceleration / deceleration is a rapid traverse bell shaped type, parameters are used to specify a linear acceleration / deceleration time constant and the time for a bell shaped curved section.

Note: in three-dimensional rigid tapping, bell-shaped acceleration/deceleration is disabled, and linear acceleration / deceleration is applied.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Smoother movements during tapping operation
- Diminution of the wear of tools and mechanical structure
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-S702 | 30i-B Rigid Tapping Bell-Shaped Acceleration/Deceleration |
| A02B-0326-S702 | 31i-B5 Rigid Tapping Bell-Shaped Acceleration/Deceleration |
| A02B-0327-S702 | 31i-B Rigid Tapping Bell-Shaped Acceleration/Deceleration |
| A02B-0328-S702 | 32i-B Rigid Tapping Bell-Shaped Acceleration/Deceleration |
| A02B-0333-S702 | 35i-B Rigid Tapping Bell-Shaped Acceleration/Deceleration |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

270

Feed Functions

Optimum Torque Acceleration/Deceleration for Rigid Tapping


Features

The Optimum Torque Acceleration / Deceleration for Rigid Tapping function can flexibly set the acceleration and deceleration of the cutting in the rigid tapping according to the torque characteristic of the spindle motor and the machine characteristic such as the friction.


The acceleration and deceleration performance (hereafter the maximum acceleration line) which can be output is usually not symmetric in a low-speed part and a high-speed part because of the torque characteristic of the spindle motor and the machine characteristic.

The conventional acceleration and deceleration (linear / bell-shaped) has a symmetric acceleration and deceleration. The acceleration/deceleration of this function is realized so that the real acceleration pattern may approach the maximum acceleration line as much as possible. The performance of the motor is drawn out to its maximum by this, and the cutting time can be shortened.

However, when the rigid tapping is used in an acceleration constant range of the spindle motor, shortening the cutting time cannot be expected. It is possible to execute the rigid tapping with the acceleration and deceleration along the maximum acceleration line by setting the acceleration line pattern in the parameter of each gear. The acceleration and deceleration of pulling out uses the same acceleration line pattern as them of the cutting.

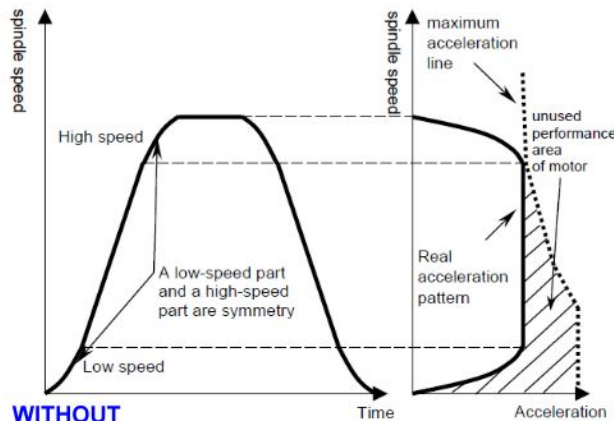

WITHOUT

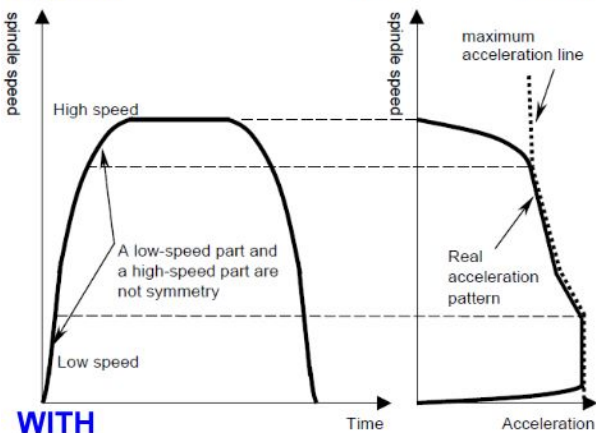

WITH

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Benefits

- Optimization of the rigid tapping processing
- Increase of the tapping and cutting performance of the machine
- Increase of the overall productivity of the machine

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0323-R533 | 30i-B Optimum Acceleration/Deceleration for Rigid Tapping |
| A02B-0326-R533 | 31i-B5 Optimum Acceleration/Deceleration for Rigid Tapping |
| A02B-0327-R533 | 31i-B Optimum Acceleration/Deceleration for Rigid Tapping |
| A02B-0328-R533 | 32i-B Optimum Acceleration/Deceleration for Rigid Tapping |
| A02B-0333-R533 | 35i-B Optimum Acceleration/Deceleration for Rigid Tapping |
| A02B-0339-R533 | 0i-TF Optimum Acceleration / Deceleration for Rigid Tapping |
| A02B-0340-R533 | 0i-MF Optimum Acceleration / Deceleration for Rigid Tapping |
| A02B-0349-R533 | 0i-TFP Optimum Acceleration / Deceleration for Rigid Tapping |

| Specification | Description |
|----------------|---------------------------------------------------------------|
| A02B-0350-R533 | 0i-MFP Optimum Acceleration / Deceleration for Rigid Tapping |
| A02B-0353-R533 | 30i-BP Optimum Acceleration / Deceleration for Rigid Tapping |
| A02B-0356-R533 | 31i-B5P Optimum Acceleration / Deceleration for Rigid Tapping |
| A02B-0357-R533 | 31i-BP Optimum Acceleration / Deceleration for Rigid Tapping |
| A02B-0358-R533 | 32i-BP Optimum Acceleration / Deceleration for Rigid Tapping |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

272

Feed Functions

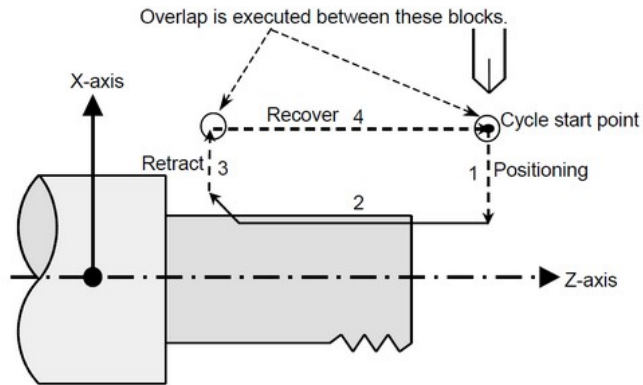

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Programmable Rapid Traverse Overlap

Features

Rapid Traverse Overlap function reduces cycle time by starting the next rapid traverse block before the previous rapid traverse block ends, when continuous blocks with rapid traverse command are given.

Here is an overview to the two added functions of Programmable Rapid Traverse Overlap:

- Programmable rapid traverse overlap: the amount of rapid traverse overlap can be changed by setting the feed rate reduction ratio to a system variable in a part program. This enables an optimal overlapping effect for each rapid traverse path of the machining program.
- Rapid traverse overlap between threading cycle blocks: shortened cycle times become possible by overlapping rapid traverse blocks during the threading cycle. As shown in the right figure, rapid traverse overlap is executed between "3.Retract and 4.Return" and between "4.Return and 1.Positioning".

Benefits


- Optimization of the cycle time of high volume production machines
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R502 | 30i-B Programmable Rapid Traverse Overlap |
| A02B-0326-R502 | 31i-B5 Programmable Rapid Traverse Overlap |
| A02B-0327-R502 | 31i-B Programmable Rapid Traverse Overlap |
| A02B-0328-R502 | 32i-B Programmable Rapid Traverse Overlap |
| A02B-0333-R502 | 35i-B Programmable Rapid Traverse Overlap |
| A02B-0334-R502 | PM i-A Programmable Rapid Traverse Overlap |
| A02B-0339-R502 | 0i-TF Programmable Rapid Traverse Overlap |
| A02B-0340-R502 | 0i-MF Programmable Rapid Traverse Overlap |
| A02B-0349-R502 | 0i-TFP Programmable Rapid Traverse |
| A02B-0350-R502 | 0i-MFP Programmable Rapid Traverse |
| A02B-0353-R502 | 30i-BP Programmable Rapid Traverse Overlap |
| A02B-0356-R502 | 31i-B5P Programmable Rapid Traverse Overlap |
| A02B-0357-R502 | 31i-BP Programmable Rapid Traverse Overlap |
| A02B-0358-R502 | 32i-BP Programmable Rapid Traverse Overlap |

273

Feed Functions

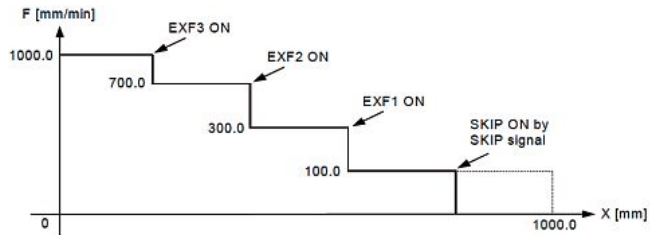

Feedrate Change Function

Features

With Feed Rate Change function, when an external signal is input, the cutting feed rate of G31 and G01 is changed to the value which is set by a parameter.

Program example (mm input)

```
G31 X1000.0 F1000.0;
```

```
M30;
```

Parameters:

- No.1481 = 100.0
- No.1482 = 300.0
- No.1483 = 700.0

When the feed rate change signals EXF3, EXF2, and EXF1 are turned on in this order during executing the above program, feed rate is changed as in the cycle shown in the illustration.

Benefits

- Possibility to change feedrates without programming
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0333-R716 | 35i-B Feed Rate Change Function |
| A02B-0334-R716 | PM i-A Feed rate Change Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

274

Feed Functions

Time Constant of Acc./Dec. After Interpolation Switching Function by Signal

Features

This function enables to switch the time constant of acceleration/deceleration after interpolation for rapid traverse and cutting feed by input signals of the PMC. It is possible to switch between three different time constants for rapid traverse and three different time constants for cutting feed.

Benefits

- Use the proper time constant for acceleration/deceleration after interpolation according to the current processing conditions

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------------|
| A02B-0323-S992 | 30i-B Time Constant of Acc./Dec. after Interpolation Switching Function by Signal |
| A02B-0326-S992 | 31i-B5 Time Constant of Acc./Dec. after Interpolation Switching Function by Signal |
| A02B-0327-S992 | 31i-B Time Constant of Acc./Dec. after Interpolation Switching Function by Signal |
| A02B-0328-S992 | 32i-B Time Constant of Acc./Dec. after Interpolation Switching Function by Signal |
| A02B-0339-S992 | 0i-TF Time Constant of Acc./Dec. after Interpolation Switching Function by Signal |
| A02B-0340-S992 | 0i-MF Time Constant of Acc./Dec. after Interpolation Switching Function by Signal |
| A02B-0349-S992 | 0i-TFP Time Constant of aAcceleration / Deceleration after Interpolation Switching Function by Signal |
| A02B-0350-S992 | 0i-MFP Time Constant of aAcceleration / Deceleration after Interpolation Switching Function by Signal |
| A02B-0353-S992 | 30i-BP Time Constant of Acc. / Dec. after Interpolation Switching Function by Signal |
| A02B-0356-S992 | 31i-B5P Time Constant of Acc. / Dec. after Interpolation Switching Function by Signal |
| A02B-0357-S992 | 31i-BP Time Constant of Acc. / Dec. after Interpolation Switching Function by Signal |
| A02B-0358-S992 | 32i-BP Time Constant of Acc. / Dec. after Interpolation Switching Function by Signal |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

275

Feed Functions

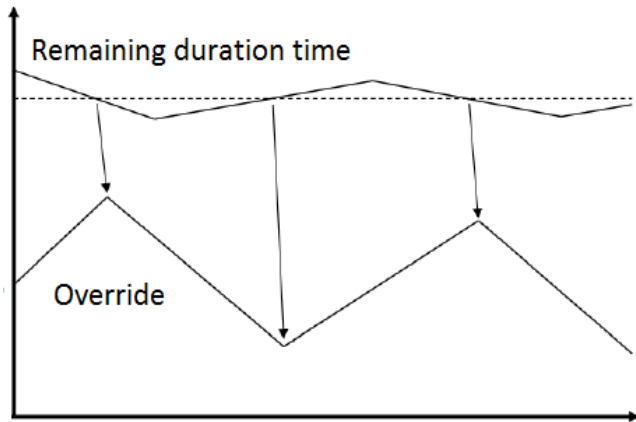

Smart Spindle-Load Control

Features

The Function Smart Adaptive Control optimizes the feed rate during machining depending on the load and the temperature of the spindle. The spindle motor power can be exploited optimally that way, especially at roughing operations. The feed rate is optimized by three different types of control:

Constant spindle load control:

The feed rate increases if the spindle load (as detected by the spindle load meter) is below a specified threshold and vice versa. This reduces cycle time on the one hand and prevents tool damage on the other hand.

Overheat avoidance control (type A):

The feed rate decreases if the spindle temperature is going to exceed its maximum temperature. Overheat alarms are avoided, leading to less down time.

Overheat avoidance control (type B) (Constant duration time control):

The feed rate decreases if the remaining duration time of the spindle is shorter than a specified threshold and vice versa. The available spindle motor power is utilized effectively while keeping a small performance buffer at the same time.

Benefits

- Reduce cycle time
- Prevent damage to machine and tools
- Minimize downtime

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R361 | 30i-B Smart Spindle Load Control Function |
| A02B-0326-R361 | 31i-B5 Smart Spindle Load Control Function |
| A02B-0327-R361 | 31i-B Smart Spindle Load Control Function |
| A02B-0328-R361 | 32i-B Smart Spindle Load Control Function |
| A02B-0333-R361 | 35i-B Smart Spindle Load Control Function |
| A02B-0339-R361 | 0i-TF Smart Spindle Load Control Function |
| A02B-0340-R361 | 0i-MF Smart Spindle Load Control Function |
| A02B-0349-R361 | 0i-TFP Smart Spindle Load Control Function |
| A02B-0350-R361 | 0i-MFP Smart Spindle Load Control Function |
| A02B-0353-R361 | 30i-BP Smart Spindle Load Control Function |
| A02B-0356-R361 | 31i-B5P Smart Spindle Load Control Function |
| A02B-0357-R361 | 31i-BP Smart Spindle Load Control Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

276

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0358-R361 | 32i-BP Smart Spindle Load Control Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

277

Feed Functions

In-Acceleration/Deceleration Signal


Features

The In-Acceleration/Deceleration Signal function During deceleration in a block for cutting feed, the in-acceleration/ deceleration signal is output to the machine.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

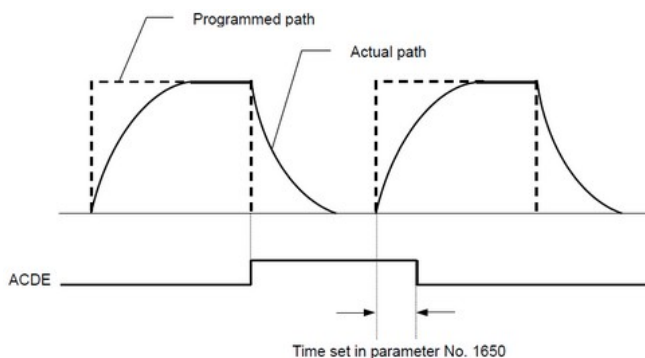

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R519 | 30i-B In-Acceleration / Deceleration Signal |
| A02B-0326-R519 | 31i-B5 In-Acceleration / Deceleration Signal |
| A02B-0327-R519 | 31i-B In-Acceleration / Deceleration Signal |
| A02B-0328-R519 | FS 32i-B In-Acceleration / Deceleration Signal |
| A02B-0340-R519 | 0i-MF In-Acceleration / Deceleration Signal |
| A02B-0350-R519 | 0i-MFP In-Acceleration / Deceleration Signal |
| A02B-0353-R519 | 30i-BP In-Acceleration / Deceleration Signal |
| A02B-0356-R519 | 31i-B5P In-Acceleration / Deceleration Signal |
| A02B-0357-R519 | 31i-BP In-Acceleration / Deceleration Signal |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

278

Functions

Program Input

This section of the catalogue contains the functions related to the programming and operation of the CNC.

Some of the functions detailed in the catalogue:

- Skip functions
- Coordinate systems
- Custom Macro
- Special cycles
- Tilted Working Plane
- Macro Executor and C-Executor
- FANUC PICTURE
- FANUC Auto HMI
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

279

Program Input

Optional Block Skip

Features

The Optional Block Skip function allows the operator to select whether a block in the part program that starts with a '/n', where n=1, is executed or skipped. Setting a bit in the PMC is required to activate this function. The 1st level, n=1, of Optional Block Skip is standard in the 30i/31i/32i-B and 0i-F controls.

Example 1:

```
/1 N12345 G00 X100.Z200.;
```

There is also a feature called Additional Optional Block Skip. This adds the levels 2 through 9 to the valid numbers for n, where n is level of the Optional Block Skip, '/n' at the beginning of the block. It requires setting PMC bits to activate these levels of Optional Block Skip.

Example 2:

```
/3 N12345 G00 X100.Z200.;
```

where n=3 for the 3rd level of Optional Block Skip

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- Additional levels of Block Skip can be added to the CNC
- Higher flexibility of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-J955 | 30i-B Optional Block Skip (Total 9) |
| A02B-0326-J955 | 31i-B5 Optional Block Skip (Total 9) |
| A02B-0327-J955 | 31i-B Optional Block Skip (Total 9) |
| A02B-0328-J955 | 32i-B Optional Block Skip (Total 9) |
| A02B-0349-J955 | 0i-TFP Optional Block Skip |
| A02B-0350-J955 | 0i-MFP Optional Block Skip |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

280

Program Input

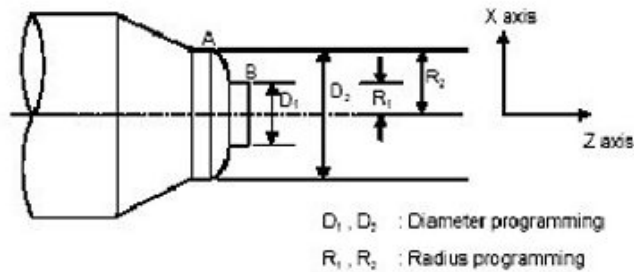

Dynamic Switching of Diameter/Radius Specification

Features

The Dynamic Switching of Diameter/Radius Specification function enables the user to switch between diameter and radius programming by using a PMC signal or G code.

When turning is performed, the cross section of a workpiece is usually a circle. The size of the circle may be specified by its diameter or radius. When the diameter is specified, it is called diameter programming and when the radius is specified, it is called radius programming. Whether to use radius programming or diameter programming is chosen for each axis by setting a parameter.

There may be cases where some coordinates or program items for an axis in diameter programming mode should preferably be handled in radius programming mode. This function enables the user to switch between diameter programming and radius programming by using a signal or G code command. The user can thus handle coordinates, program items, and other settings for an axis in diameter programming mode as well as in radius programming mode.

Benefits

- Addition of flexibility to the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0323-S630 | 30i-B Diameter / Radius Dynamic Switching |
| A02B-0326-S630 | 31i-B5 Diameter / Radius Dynamic Switching |
| A02B-0327-S630 | 31i-B Diameter / Radius Dynamic Switching |
| A02B-0328-S630 | 32i-B Dynamic Switching of Diameter/Radius Specification |
| A02B-0349-S630 | 0i-TFP Dynamic Switching of Diameter / Radius Specification |
| A02B-0353-S630 | 30i-BP Dynamic Switching of Diameter / Radius Specification |
| A02B-0356-S630 | 31i-B5P Dynamic Switching of Diameter / Radius Specification |
| A02B-0357-S630 | 31i-BP Dynamic Switching of Diameter / Radius Specification |
| A02B-0358-S630 | 32i-BP Dynamic Switching of Diameter / Radius Specification |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

281

Program Input

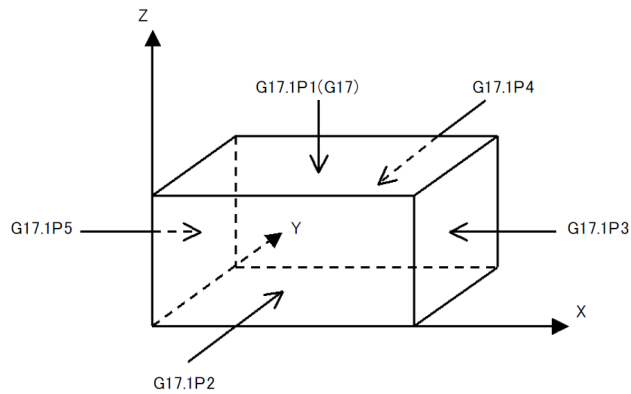

Plane Conversion Function

Features

This function converts a machining program created on the G17 plane in the right-hand cartesian coordinate system into a program for another plane specified by G17.1Px commands.

Benefits

- Simplifies programming

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-R701 | 30i-B Plane Conversion Function |
| A02B-0326-R701 | 31i-B5 Plane Conversion Function |
| A02B-0327-R701 | 31i-B Plane Conversion Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

282

Program Input

Polar Coordinate Command

Features

When machining using arc based coordinates, it is usually easier to specify a move in terms of an angular displacement and a radius.

By turning on the Polar Coordinate Command function, the programmer can choose to command moves that employ polar coordinates in any segment of his program. He can also cancel polar coordinate commands and revert to the traditional Cartesian command system when those are more appropriate.


This function is a basic function in FANUC Series 0i-MF, 0i-MF Plus and 0i-LF Plus.

Benefits

- Ease of programming coordinates on arcs and circles.
- Transposition of angles and radii dimensions direct from blueprints.

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J818 | 30i-B Polar Coordinate Command |
| A02B-0326-J818 | 31i-B5 Polar Coordinate Command |
| A02B-0327-J818 | 31i-B Polar Coordinate Command |
| A02B-0328-J818 | 32i-B Polar Coordinate Command |
| A02B-0353-J818 | 30i-BP Polar Coordinate Command |
| A02B-0356-J818 | 31i-B5P Polar Coordinate Command |
| A02B-0357-J818 | 31i-BP Polar Coordinate Command |
| A02B-0358-J818 | 32i-BP Polar Coordinate Command |

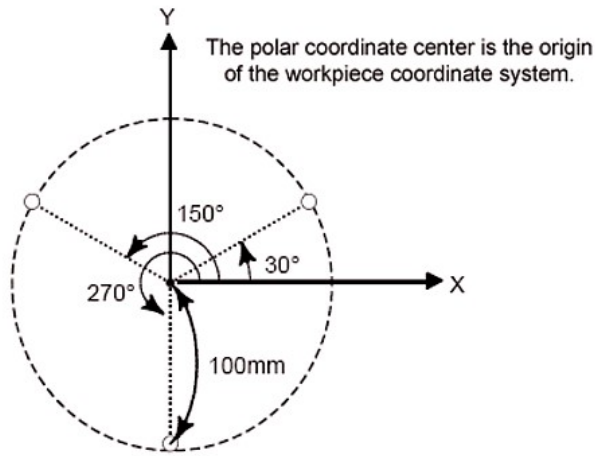


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

283

Program Input

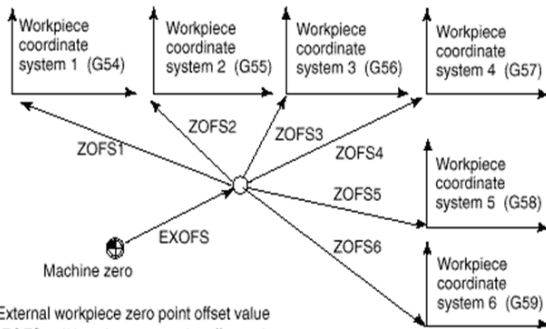

EXOFS : External workpiece zero point offset value
ZOFs1 to ZOFs6 : Workpiece zero point offset value

Workpiece Coordinate System

Features

Coordinate system used for machining a workpiece is referred to as a workpiece coordinate system.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Six standard work coordinate systems (G54-G59)
- Part program reflects part print dimensions
- Fixture location inaccuracies compensated
- Additional adjustment using common offset

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J894 | 30i-B Workpiece Coordinate System |
| A02B-0326-J894 | 31i-B5 Workpiece Coordinate System |
| A02B-0327-J894 | 31i-B Workpiece Coordinate System |
| A02B-0328-J894 | 32i-B Workpiece Coordinate System |
| A02B-0333-J894 | 35i-B Workpiece Coordinate System |
| A02B-0334-J894 | PM i-A Workpiece Coordinate System |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

284

Program Input

Workpiece Coordinate System Preset

Features

The workpiece coordinate system, with its zero point shifted away from the machine coordinate system zero point by the workpiece origin offset value, is set by returning the tool to the reference position by a manual operation.

In addition, when an absolute position detector is provided, the workpiece coordinate system is automatically set by reading the machine coordinate value from the detector when the control is powered on without performing a manual reference position return operation.

The set workpiece coordinate system may shift by any of the following commands or operations:

- Manual intervention performed when the manual absolute signal is off
- Move command executed in the machine lock state
- Movement by handle interruption
- Operation using the mirror image function
- Shifting the workpiece coordinate system by setting the local coordinate system or workpiece coordinate system

By G code specification or MDI operation, a workpiece coordinate system shifted by an operation above can be preset to a workpiece coordinate system offset from the machine zero point by a workpiece origin offset as in the case of manual reference position return.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J917 | 30i-B Workpiece Coordinate Preset |
| A02B-0326-J917 | 31i-B5 Workpiece Coordinate Preset |
| A02B-0327-J917 | 31i-B Workpiece Coordinate Preset |
| A02B-0328-J917 | 32i-B Workpiece Coordinate Preset |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

285

Program Input

Addition of Workpiece Coordinate System 48 Pairs

Features

Besides the six workpiece coordinate systems based on G54 to G59 (standard workpiece coordinate systems), up to 48 additional workpiece coordinate systems can be used optionally. As with the workpiece coordinate system based on G54 to G59, the following workpiece origin offset setting and modification methods are available:

- MDI-based method
- Program-based method
- Setting based on programmable data input (G10L2Pp)
- Setting based on custom macros

This function is a basic function in FANUC Series 0i-MF, 0i-MF Plus and 0i-LF Plus.

Benefits

- Increase of the flexibility of the machining
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-J895 | 30i-B Workpiece Coordinate, 48 Pairs |
| A02B-0326-J895 | 31i-B5 Workpiece Coordinate, 48 Pairs |
| A02B-0327-J895 | 31i-B Workpiece Coordinate, 48 Pairs |
| A02B-0328-J895 | 32i-B Workpiece Coordinate, 48 Pairs |
| A02B-0333-J895 | 35i-B Workpiece Coordinate, 48 Pairs |
| A02B-0349-J895 | 0i-TFP Addition of Workpiece Coordinate System - 48 Pairs |
| A02B-0353-J895 | 30i-BP Addition of Workpiece Coordinate System - 48 Pairs |
| A02B-0356-J895 | 31i-B5P Addition of Workpiece Coordinate System - 48 Pairs |
| A02B-0357-J895 | 31i-BP Addition of Workpiece Coordinate System - 48 Pairs |
| A02B-0358-J895 | 32i-BP Addition of Workpiece Coordinate System - 48 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

286

Program Input

Addition of Workpiece Coordinate System 300 Pairs

Features

Besides the six workpiece coordinate systems based on G54 to G59 (standard workpiece coordinate systems), up to 300 additional workpiece coordinate systems can be used optionally. As with the workpiece coordinate system based on G54 to G59, the following workpiece origin offset setting and modification methods are available:

- MDI-based method
- Program-based method
- Setting based on programmable data input (G10L2Pp)
- Setting based on custom macros

Benefits

- Increase of the flexibility of the machine
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-J919 | 30i-B Addition of Workpiece Coordinate System, 300 Pairs |
| A02B-0326-J919 | 31i-B5 Addition of Workpiece Coordinate System, 300 Pairs |
| A02B-0327-J919 | 31i-B Addition of Workpiece Coordinate System, 300 Pairs |
| A02B-0328-J919 | 32i-B Addition of Workpiece Coordinate System, 300 Pairs |
| A02B-0340-J919 | 0i-MF Addition of Workpiece Coordinate System 300 Pairs |
| A02B-0350-J919 | 0i-MFP Addition of Workpiece Coordinate System 300 Pairs |
| A02B-0353-J919 | 30i-BP Addition of Workpiece Coordinate System - 300 Pairs |
| A02B-0356-J919 | 31i-B5P Addition of Workpiece Coordinate System - 300 Pairs |
| A02B-0357-J919 | 31i-BP Addition of Workpiece Coordinate System - 300 Pairs |
| A02B-0358-J919 | 32i-BP Addition of Workpiece Coordinate System - 300 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

287

Program Input

Positioning in Machine Coordinate System with Feedrate

Features

Conventionally machine coordinate system setting (G53) is performed only at a rapid traverse rate.

With this function, the machine coordinate system setting is available at a feed rate.

Example:

```
G53.2 G01 IP_ F_;
```

IP_: Dimension word

F_: Feed rate

Benefits

- Increase of the setting of coordinate system
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------|
| A02B-0323-R553 | 30i-B Positioning in Machine Coordinate System with Feed Rate |
| A02B-0326-R553 | 31i-B5 Positioning in Machine Coordinate System with Feed Rate |
| A02B-0327-R553 | 31i-B Positioning in Machine Coordinate System with Feed Rate |
| A02B-0328-R553 | 32i-B Positioning in Machine Coordinate System with Feed Rate |
| A02B-0339-R553 | 0i-TF Positioning in Machine Coordinate System with Feedrate |
| A02B-0340-R553 | 0i-MF Positioning in Machine Coordinate System with Feedrate |
| A02B-0349-R553 | 0i-TFP Positioning in Machine Coordinate System with Feedrate |
| A02B-0350-R553 | 0i-MFP Positioning in Machine Coordinate System with Feedrate |
| A02B-0353-R553 | 30i-BP Positioning in Machine Coordinate System with Feedrate |
| A02B-0356-R553 | 31i-B5P Positioning in Machine Coordinate System with Feedrate |
| A02B-0357-R553 | 31i-BP Positioning in Machine Coordinate System with Feedrate |
| A02B-0358-R553 | 32i-BP Positioning in Machine Coordinate System with Feedrate |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

288

Program Input

Direct Drawing Dimension Programming

Features

The Direct Drawing Dimension Programming is a function that simplifies part programming on the shop floor.

Angles of straight lines, chamfering values, corner rounding values, and other dimensional values on machining drawings can be programmed by directly inputting these values.

In addition, chamfering and corner rounding can be inserted between straight lines having an arbitrary angle.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Addition of programming functions to the CNC
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-J870 | 30i-B Direct Drawing Programming |
| A02B-0326-J870 | 31i-B5 Direct Drawing Programming |
| A02B-0327-J870 | 31i-B Direct Drawing Programming |
| A02B-0328-J870 | 32i-B Direct Drawing Programming |
| A02B-0353-J870 | 30i-BP Direct Drawing Dimension Programming |
| A02B-0356-J870 | 31i-B5P Direct Drawing Dimension Programming |
| A02B-0357-J870 | 31i-BP Direct Drawing Dimension Programming |
| A02B-0358-J870 | 32i-BP Direct Drawing Dimension Programming |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

289

Program Input

G-Code System B/C

Features

This option allows to choose between three types of G-code systems that are available for lathe system CNC: A, B and C. The G-code system can be selected by parameter setting. The following table outlines the differences between the G-code systems.

| G-Code System | | | Function |
|---------------|-------|-------|-------------------------------------------------------|
| A | B | C | |
| G20 | G20 | G70 | Inch input |
| G21 | G21 | G71 | Metric input |
| G32 | G33 | G33 | Thread cutting |
| G50 | G92 | G92 | Coordinate system setting or max. spindle speed clamp |
| G50.3 | G92.1 | G92.1 | Workpiece coordinate system preset |
| - | G50 | G50 | Scaling cancel |
| - | G51 | G51 | Scaling |
| G70 | G70 | G72 | Finishing cycle |
| G71 | G71 | G73 | Stock removal in turning |
| G72 | G72 | G74 | Stock removal in facing |
| G73 | G73 | G75 | Pattern repeating cycle |
| G74 | G74 | G76 | End face peck drilling cycle |
| G75 | G75 | G77 | Outer diameter / internal diameter drilling cycle |
| G76 | G76 | G78 | Multiple-thread cutting cycle |
| G71 | G71 | G72 | Traverse grinding cycle |
| G72 | G72 | G73 | Traverse direct sizing/ grinding cycle |
| G73 | G73 | G74 | Oscillation grinding cycle |
| G74 | G74 | G75 | Oscillation direct sizing/ grinding cycle |
| G90 | G77 | G20 | Outer diameter / internal diameter cutting cycle |
| G92 | G78 | G21 | Threading cycle |
| G94 | G79 | G24 | End face turning cycle |
| G98 | G94 | G94 | Feed per minute |
| G99 | G95 | G95 | Feed per revolution |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| G-Code System | | | Function |
|---------------|-----|-----|---------------------------------------|
| A | B | C | |
| - | G90 | G90 | Absolute programming |
| - | G91 | G91 | Incremental programming |
| - | G98 | G98 | Canned cycle: return to initial level |
| - | G99 | G99 | Canned cycle: return to R point level |

If G-code system A is used, absolute or incremental programming is specified not by G-code (G90/G91), but by address word (X/U, Z/W, C/H, Y/V). Only the initial level is provided at the return point of canned cycle for drilling.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Increase of the programming flexibility of the CNC
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J871 | 30i-B G Code System B and C |
| A02B-0326-J871 | 31i-B5 G Code System B and C |
| A02B-0327-J871 | 31i-B G Code System B and C |
| A02B-0328-J871 | 32i-B G Code System B and C |
| A02B-0353-J871 | 30i-BP G-Code System B / C |
| A02B-0356-J871 | 31i-B5P G-Code System B / C |
| A02B-0357-J871 | 31i-BP G-Code System B / C |
| A02B-0358-J871 | 32i-BP G-Code System B / C |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

291

Program Input

Lathe / Machining Center G-Code System Switching Function

Features

This function switches over G code system of each path for lathe and machining center by certain programming commands (M codes). The optimum program command and function for each processing, the turning processing and the milling processing, is available by switching mode.

Note: tool offset for Milling and Turning function (R595) and Designation of Designation of Machine Control, Type Multiple System (S838/C) is required.

Benefits

- Increase of the programming flexibility
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-R597 | 30i-B Lathe/Machining Center G-Code System Switching Function |
| A02B-0326-R597 | 31i-B5 Lathe/Machining Center G-Code System Switching Function |
| A02B-0327-R597 | 31i-B Lathe/Machining Center G-Code System Switching Function |
| A02B-0328-R597 | 32i-B Lathe/Machining Center G-Code System Switching Function |
| A02B-0353-R597 | 30i-BP Lathe / Machining Center G-Code System Switching Function |
| A02B-0356-R597 | 31i-B5P Lathe / Machining Center G-Code System Switching Function |
| A02B-0357-R597 | 31i-BP Lathe / Machining Center G-Code System Switching Function |
| A02B-0358-R597 | 32i-BP Lathe / Machining Center G-Code System Switching Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

292

Program Input

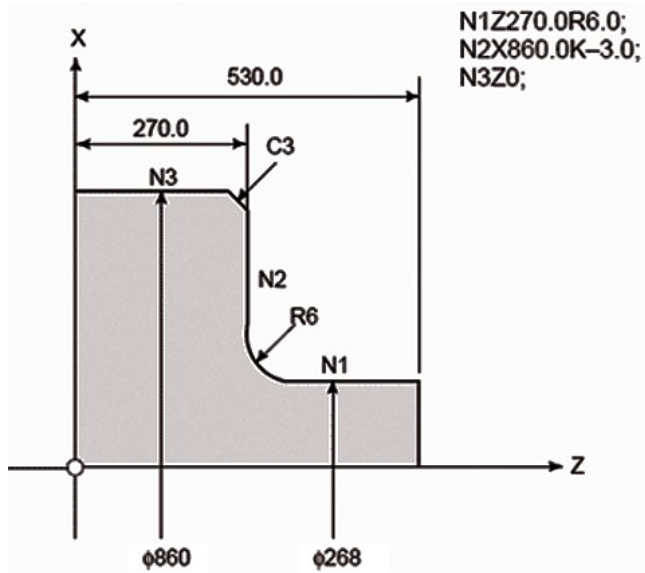

Chamfering / Corner Rounding

Features

The Chamfering / Corner Radius function is used on turning ('T' type) controls to insert a defined 45-degree chamfer or radius between two single-axis linear move program blocks that intersect at right angles.

It allows the programmer to enter the hypothetical corner intersection coordinates without having to calculate the start and end points of the chamfer or radius.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Simplifies programming of chamfers and radii between right angle linear moves
- Simplifies blueprint programming
- Easy shop-floor changes to add radii and chamfers to existing programs

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-J875 | 30i-B Chamfering/Corner Rounding (Turning) |
| A02B-0326-J875 | 31i-B5 Chamfering/Corner Rounding (Turning) |
| A02B-0327-J875 | 31i-B Chamfering/Corner Rounding (Turning) |
| A02B-0328-J875 | 32i-B Chamfering/Corner Rounding (Turning) |
| A02B-0353-J875 | 30i-BP Chamferring / Corner R |
| A02B-0356-J875 | 31i-B5P Chamferring / Corner R |
| A02B-0357-J875 | C31i-BP Chamferring / Corner R |
| A02B-0358-J875 | 32i-BP Chamferring / Corner R |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

293

Program Input

Optional Chamfering / Corner Rounding

Features

The Optional Chamfering / Corner Radius function is used on milling ('M' type) controls to insert a defined chamfer or radius between any two linear or circular program moves.

It allows programming of geometry end-coordinates is if chamfer or corner rounding were not required. Then, chamfers or radii can easily be applied by appending to the first of the program blocks either a (comma),C_ %value% or (comma),R_ %value%.

This function is a basic function in FANUC Series 0i-MF, 0i-MF Plus and 0i-LF Plus.

Benefits

- Simplifies programming of chamfers and radii
- Simplifies blueprint programming
- Easy shop floor changes to add or change radii and chamfers on existing programs without changing the program block end-coordinates.

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0323-S615 | 30i-B Optional Chamfering/Corner Rounding (Milling) |
| A02B-0326-S615 | 31i-B5 Optional Chamfering/Corner Rounding (Milling) |
| A02B-0327-S615 | 31i-B Optional Chamfering/Corner Rounding (Milling) |
| A02B-0328-S615 | 32i-B Optional Chamfering/Corner Rounding (Milling) |
| A02B-0353-S615 | 30i-BP Optimal Chamferring Corner R |
| A02B-0356-S615 | 31i-B5P Optimal Chamferring Corner R |
| A02B-0357-S615 | 31i-BP Optimal Chamferring Corner R |
| A02B-0358-S615 | 32i-BP Optimal Chamferring Corner R |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

294

Program Input

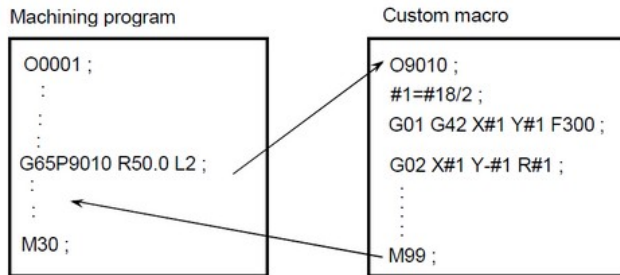

Custom Macro

Features

The Custom Macro function (similar to Basic programming) allows programming of G code with variables, logical expressions, conditional loops. It also allows to read/write machine status to/from the NC program. Custom Macro is required for probing applications.

Although subprograms are useful for repeating the same operation, the custom macro function also allows use of variables, arithmetic and logic operations, and conditional branches for easy development of general programs such as pocketing and user-defined canned cycles. A machining program can call a custom macro with a simple command, just like a subprogram.

An ordinary machining program specifies a G code and the travel distance directly with a numeric value. With a custom macro, numeric values can be specified directly or using a variable number. When a variable number is used, the variable value can be changed by a program or using operations on the MDI panel.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Recipe management
- Custom Canned cycles
- CNC and operator messages
- Automation of the communication to the Ladder Logic program
- Automation of Probing system
- Update of offsets
- Reduction of Part Program size

Ordering Information

| Specification | Description |
|----------------|---------------------|
| A02B-0323-J873 | 30i-B Custom Macro |
| A02B-0326-J873 | 31i-B5 Custom Macro |
| A02B-0327-J873 | 31i-B Custom Macro |
| A02B-0328-J873 | 32i-B Custom Macro |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

295

Program Input

Addition of Custom Macro Common Variables

Features

Allows additional data fields for common variables (#100 and #500 series)

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Allows permanent data retention
- No need to re-write data
- Keep calibration data with the job
- No need to use same variable numbers for interim calculations
- Facilitates debugging of Macro B program

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------|
| A02B-0323-J887 | 30i-B Addition of Custom Macro Common Variables, 500 Variables |
| A02B-0326-J887 | 31i-B5 Addition of Custom Macro Common Variables, 500 Variables |
| A02B-0327-J887 | 31i-B Addition of Custom Macro Common Variables, 500 Variables |
| A02B-0328-J887 | 32i-B Addition of Custom Macro Common Variables, 500 Variables |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

296

Program Input

Addition of Custom Macro Common Variables 1000

Features

The Addition of Custom Macro Common Variables 1000 function provides the possibility to use the custom macro common variables #150-#199, #550-#999, and #98000-#98499 in addition to custom macro common variables #100-#149 and #500-#549.

Benefits

- Allows permanent data retention
- No need to re-write data
- Keep calibration data with the job
- No need to use same variable numbers for interim calculations
- Facilitates debugging of Macro B program

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0323-R687 | 30i-B Addition of Custom Macro Common Variables, 1000 Variables |
| A02B-0326-R687 | 31i-B5 Addition of Custom Macro Common Variables, 1000 Variables |
| A02B-0327-R687 | 31i-B Addition of Custom Macro Common Variables, 1000 Variables |
| A02B-0328-R687 | 32i-B Addition of Custom Macro Common Variables, 1000 Variables |
| A02B-0333-R687 | 35i-B Addition of Custom Macro Common Variables, 1000 Variables |
| A02B-0339-R687 | 0i-TF Additional Custom Maco Common Variables |
| A02B-0340-R687 | 0i-MF Additional Custom Maco Common Variables |
| A02B-0349-R687 | 0i-TFP Addition of Custom Macro Common Variables, 1000 |
| A02B-0350-R687 | 0i-MFP Addition of Custom Macro Common Variables, 1000 |
| A02B-0353-R687 | 30i-BP Addition of Custom Macro Common Variables - 1000 |
| A02B-0356-R687 | 31i-B5P Addition of Custom Macro Common Variables - 1000 |
| A02B-0357-R687 | 31i-BP Addition of Custom Macro Common Variables - 1000 |
| A02B-0358-R687 | 32i-BP Addition of Custom Macro Common Variables - 1000 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

297

Program Input

Custom Macro Variable Name 31 Characters

Features

Variable names enhance the readability of custom macro programs. As a standard, a variable name can consist of up to 8 characters. This option lets you set Custom macro variable names consisting of up to 31 characters. You can choose descriptive variable names without being restricted by the variable name length, enhancing the readability of Custom macro programs even more.

Benefits

- Enhance the readability of Custom macro programs by choosing descriptive variable names

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R583 | 30i-B Custom Macro Variable Names with 31 Characters |
| A02B-0326-R583 | 31i-B5 Custom Macro Variable Names with 31 Characters |
| A02B-0327-R583 | 31i-B Custom Macro Variable Names with 31 Characters |
| A02B-0328-R583 | 32i-B Custom Macro Variable Names with 31 Characters |
| A02B-0339-R583 | 0i-TF Custom Macro Variable Names with 31 Characters |
| A02B-0340-R583 | 0i-MF Custom Macro Variable Names with 31 Characters |
| A02B-0349-R583 | 0i-TFP Custom Macro Variable Name with 31 Characters |
| A02B-0350-R583 | 0i-MFP Custom Macro Variable Name with 31 Characters |
| A02B-0353-R583 | 30i-BP Custom Macro Variable Name with 31 Characters |
| A02B-0356-R583 | 31i-B5P Custom Macro Variable Name with 31 Characters |
| A02B-0357-R583 | 31i-BP Custom Macro Variable Name with 31 Characters |
| A02B-0358-R583 | 32i-BP Custom Macro Variable Name with 31 Characters |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

298

Program Input

Number of Custom Macro Variable Name 1000

Features

This function increases the maximum number of custom macro variable names. It is possible to set up to 1000 variable names with the SETVN command. Variable names enhance the readability of custom macro programs, they can be set to any custom macro variable including local variables, system variables etc.

Benefits

- Improve the development and maintenance of custom macro programs

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0323-R323 | 30i-B Number of Custom Macro Variable Name 1000 |
| A02B-0326-R323 | 31i-B5 Number of Custom Macro Variable Name 1000 |
| A02B-0327-R323 | 31i-B Number of Custom Macro Variable Name 1000 |
| A02B-0328-R323 | 32i-B Number of Custom Macro Variable Name 1000 |
| A02B-0334-R323 | PM i-A Number of Custom Macro Variable Name 1000 |
| A02B-0339-R323 | 0i-TF Number of Custom Macro Variable Name 1000 |
| A02B-0340-R323 | 0i-MF Number of Custom Macro Variable Name 1000 |
| A02B-0349-R323 | 0i-TFP Number of Custom Macro Variable Name 1000 |
| A02B-0350-R323 | 0i-MFP Number of Custom Macro Variable Name 1000 |
| A02B-0353-R323 | 30i-BP Number of Custom Macro Variable Names - 1000 |
| A02B-0356-R323 | 31i-B5P Number of Custom Macro Variable Names - 1000 |
| A02B-0357-R323 | 31i-BP Number of Custom Macro Variable Names - 1000 |
| A02B-0358-R323 | 32i-BP Number of Custom Macro Variable Names - 1000 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

299

Program Input

Number of Custom Macro Variable Name 4000

Features

This function increases the maximum number of custom macro variable names. It is possible to set up to 4000 variable names with the SETVN command. Variable names enhance the readability of custom macro programs, they can be set to any custom macro variable including local variables, system variables etc.

Benefits

- Improve the development and maintenance of custom macro programs

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0323-R324 | 30i-B Number of Custom Macro Variable Name 4000 |
| A02B-0326-R324 | 31i-B5 Number of Custom Macro Variable Name 4000 |
| A02B-0327-R324 | 31i-B Number of Custom Macro Variable Name 4000 |
| A02B-0328-R324 | 32i-B Number of Custom Macro Variable Name 4000 |
| A02B-0334-R324 | PM i-A Number of Custom Macro Variable Name 4000 |
| A02B-0339-R324 | 0i-TF Number of Custom Macro Variable Name 4000 |
| A02B-0340-R324 | 0i-MF Number of Custom Macro Variable Name 4000 |
| A02B-0349-R324 | 0i-TFP Number of Custom Macro Variable Name 4000 |
| A02B-0350-R324 | 0i-MFP Number of Custom Macro Variable Name 4000 |
| A02B-0353-R324 | 30i-BP Number of Custom Macro Variable Names - 4000 |
| A02B-0356-R324 | 31i-B5P Number of Custom Macro Variable Names - 4000 |
| A02B-0357-R324 | 31i-BP Number of Custom Macro Variable Names - 4000 |
| A02B-0358-R324 | 32i-BP Number of Custom Macro Variable Names - 4000 |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

300

Program Input

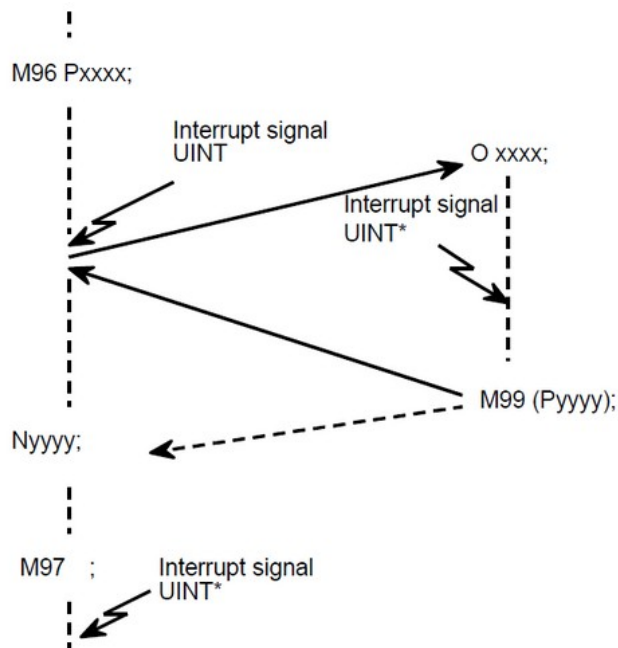

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Interruption Type Custom Macro

Features

When custom macro interruption signal is input during automatic operation, the block currently under execution is interrupted and the specified custom macro is activated.

After execution of this custom macro, it returns to the interrupted block and continues execution of the remaining commands.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- Allows macro program to jump to specific instructions depending on conditions

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-J874 | 30i-B Interruption Type Custom Macro |
| A02B-0326-J874 | 31i-B5 Interruption Type Custom Macro |
| A02B-0327-J874 | 31i-B Interruption Type Custom Macro |
| A02B-0328-J874 | 32i-B Interruption Type Custom Macro |
| A02B-0333-J874 | 35i-B Interruption Type Custom Macro |
| A02B-0334-J874 | PM i-A Interruption Type Custom Macro |
| A02B-0339-J874 | 0i-TF Interruption Type Custom Macro |
| A02B-0340-J874 | 0i-MF Interruption Type Custom Macro |
| A02B-0349-J874 | 0i-TFP Interruption Type Custom Macro |
| A02B-0350-J874 | 0i-MFP Interruption Type Custom Macro |

301

Program Input

Macro for Multi-Axes High-Response Function

Features

With the Macro for Multi-Axes High-Response Function, it is possible to use macro statements and custom macro variables in the high-response mode.

Note

The Multi-Axes High-Response Function is required to use this function

Benefits

- Extends the application range of the Multi-Axes High-Response Function

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0334-R397 | PM i-A Macro for Multi-Axes High-Response Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

302

Program Input

Multi-Repetitive Cycles

Features

Multiple Repetitive Cycles are a series of seven additional Canned Cycles for Turning applications.

G70, G71, G72, G73, G74, G75 and G76 ease the programming of complex machining cycles.

- G71 - Stock Removal in Turning. Type I figures only, no pockets.
- G72 - Stock Removal in Facing. Type I figures only, no pockets.
- G73 - Pattern Repeating.
- G70 - Finishing
- G74 - End Face Peck Drilling Cycle.
- G75 - Outer Diameter / Internal Diameter Drilling Cycle.
- G76 - Multiple Threading Cycle.


This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Simplification of the CNC Programming
- Increase of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J877 | 30i-B Multiple Repetitive Cycles |
| A02B-0326-J877 | 31i-B5 Multiple Repetitive Cycles |
| A02B-0327-J877 | 31i-B Multiple Repetitive Cycles |
| A02B-0328-J877 | 32i-B Multiple Repetitive Cycles |
| A02B-0353-J877 | 30i-BP Multiple Repetitive Cycles |
| A02B-0356-J877 | 31i-B5P Multiple Repetitive Cycles |
| A02B-0357-J877 | 31i-BP Multiple Repetitive Cycles |
| A02B-0358-J877 | 32i-BP Multiple Repetitive Cycles |

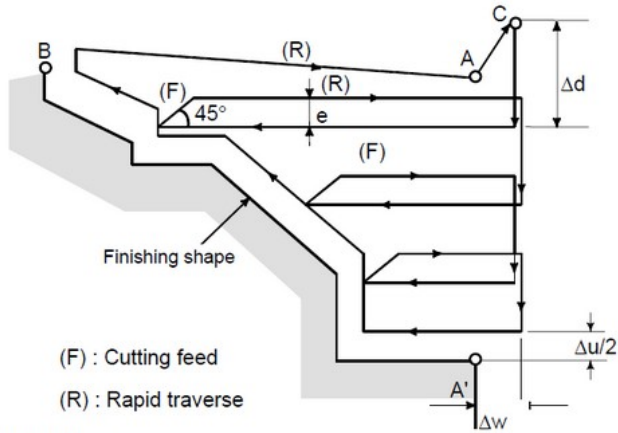

G71 U(Δd) R(e);
G71 P(ns) Q(nf) U(Δu) W(Δw) F(f) S(s) T(t);
N(ns)
.
F
S
T
N(nf)

The move command of a finished shape of A to A' to B is specified in the blocks from sequence number ns to nf.


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

303

Program Input

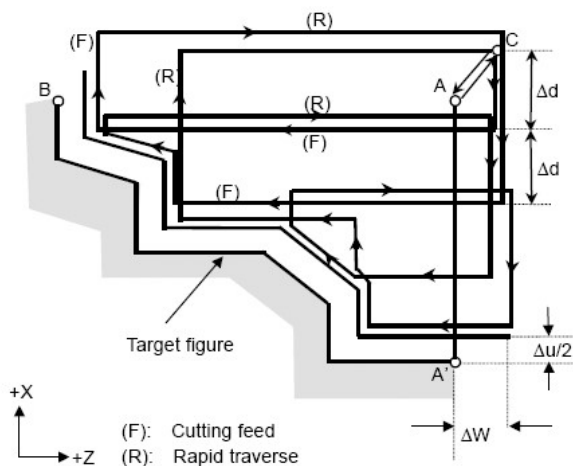

Multi-Repetitive Cycles II

Features

Multiple Repetitive Cycles II are an enhanced version of the Multiple Repetitive Cycles I, G71 and G72, that enable the programmer to define pockets on the work piece to be machined.

With Multiple Repetitive Cycles II, the tool cuts the work piece along the target figure (comp. picture).

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Simplification of the Programming of the cycles
- Increase of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-J889 | 30i-B Multiple Repetitive Cycles II |
| A02B-0326-J889 | 31i-B5 Multiple Repetitive Cycles II |
| A02B-0327-J889 | 31i-B Multiple Repetitive Cycles II |
| A02B-0328-J889 | 32i-B Multiple Repetitive Cycles II |
| A02B-0353-J889 | 30i-BP Multiple Repetitive Cycles II |
| A02B-0356-J889 | 31i-B5P Multiple Repetitive Cycles II |
| A02B-0357-J889 | 31i-BP Multiple Repetitive Cycles II |
| A02B-0358-J889 | 32i-BP Multiple Repetitive Cycles II |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

304

Program Input

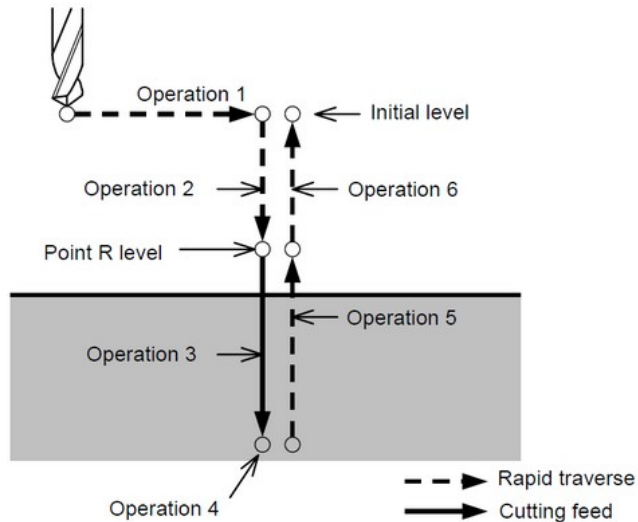

Canned Cycles for Drilling

Features

Canned Cycles for Drilling are programming commands that perform complex drilling operations in a single command block.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Simplification of the programming of complex cycles
- Increase of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J890 | 30i-B Canned Cycles for Drilling |
| A02B-0326-J890 | 31i-B5 Canned Cycles for Drilling |
| A02B-0327-J890 | 31i-B Canned Cycles for Drilling |
| A02B-0328-J890 | 32i-B Canned Cycles for Drilling |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

305

Program Input

In-Position Check Switching Function for Drilling Canned Cycle

Features

Provides four dedicated in-position zone settings that are defined for use during drilling canned cycles. Three settings may be set to utilize larger in-position zones for moves within drilling canned cycles that do not require fine positioning. Cycle time is reduced by not spending excess time applying higher accuracy positioning when it is not required.

In-position zone setting for final depth of the drilling canned cycle is set separately, facilitating high accuracy positioning to meet part specifications.


Benefits

- Reduces execution time of Drilling Canned Cycles
- Allows tighter In-Position zone to be used for final depth, without adverse affect on other drilling/positioning moves during the canned cycle
- Tool life during drilling cycles may be improved by more efficient operation

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------|
| A02B-0323-R648 | 30i-B In-Position Check Switching Function for Canned Cycles for Drilling |
| A02B-0326-R648 | 31i-B5 In-Position Check Switching Function for Canned Cycles for Drilling |
| A02B-0327-R648 | 31i-B In-Position Check Switching Function for Canned Cycles for Drilling |
| A02B-0328-R648 | 32i-B In-Position Check Switching Function for Canned Cycles for Drilling |
| A02B-0333-R648 | 35i-B In-Position Check Switching Function for Canned Cycles for Drilling |
| A02B-0353-R648 | 30i-BP In-Position Check Switching Function for Drilling Canned Cycle |
| A02B-0356-R648 | 31i-B5P In-Position Check Switching Function for Drilling Canned Cycle |
| A02B-0357-R648 | 31i-BP In-Position Check Switching Function for Drilling Canned Cycle |
| A02B-0358-R648 | 32i-BP In-Position Check Switching Function for Drilling Canned Cycle |

High-Speed peck Drilling Cycle (G73)

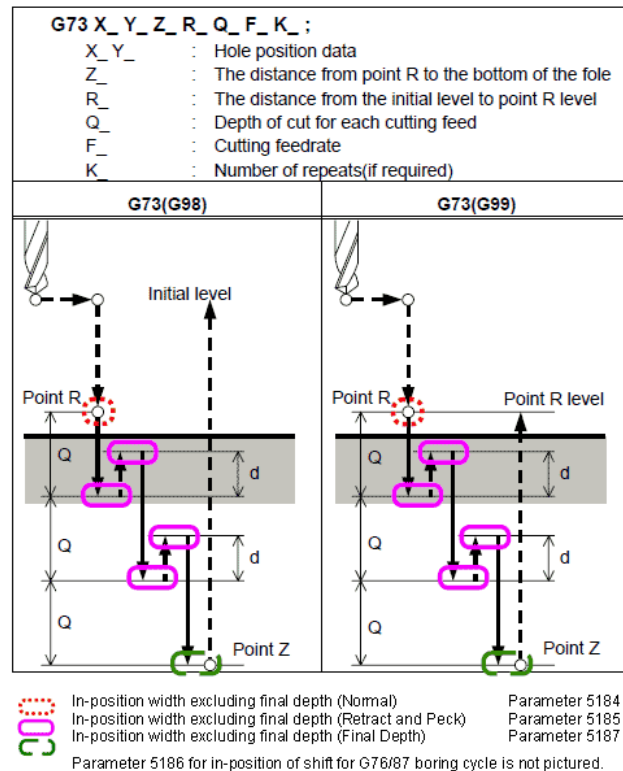


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

306

Program Input

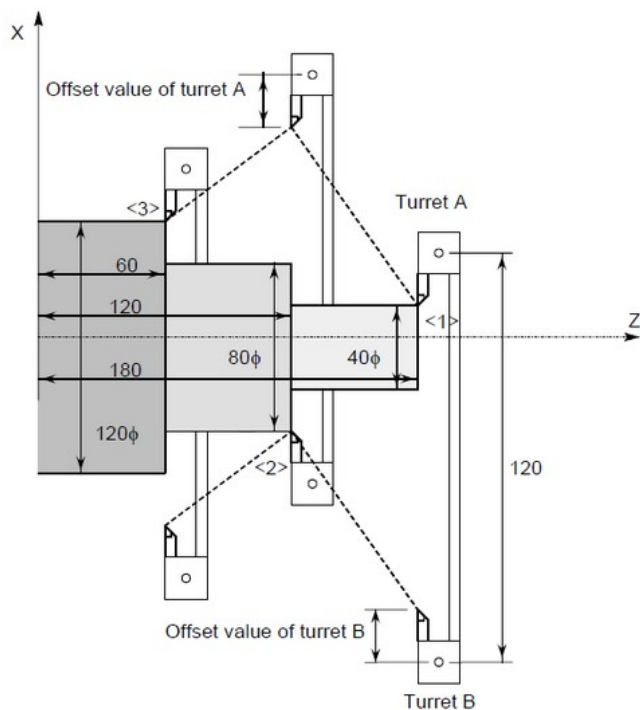

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Mirror Image for Double Turret

Features

By applying mirror image to the X-axis with a G code, a machining program for the opposite tool post can be created for symmetric cutting as if the program were created in the coordinate system on the same side.

When G68 is designated, the coordinate system is shifted to the double turret side, and the X-axis sign is reversed from the programmed command to perform symmetrical cutting. To use this function, set the distance between the two tool posts to a parameter.

Programming example

| | |
|---------------------|--------------------------------------------------------------------------------------|
| X.40.0 Z180.0 T0101 | Position tool post A at '1' |
| G68 | Shift the coordinate system by the distance A to B (120mm), and turn mirror image on |
| X80.0 Z120.0 T0202 | Position tool post B at '2' |
| G69 | Shift the coordinate system by the distance B to A, and cancel mirror image. |
| X120.0 Z60.0 T0101 | Position tool post A at '3' |

This function is a basic function in FANUC Series 0i-TF (Type 1) and 0i-TF Plus (Type 0, Type 1).

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J881 | 30i-B Mirror Image for Double Turret |
| A02B-0326-J881 | 31i-B5 Mirror Image for Double Turret |
| A02B-0327-J881 | 31i-B Mirror Image for Double Turret |
| A02B-0328-J881 | 32i-B Mirror Image for Double Turret |
| A02B-0339-J881 | 0i-TF Mirror Image for Double Turret |
| A02B-0349-J881 | 0i-TFP Mirror Image for Double Turret |
| A02B-0353-J881 | 30i-BP Mirror Image for Double Turret |
| A02B-0356-J881 | 31i-B5P Mirror Image for Double Turret |

307

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0357-J881 | 31i-BP Mirror Image for Double Turret |
| A02B-0358-J881 | 32i-BP Mirror Image for Double Turret |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

308

Program Input

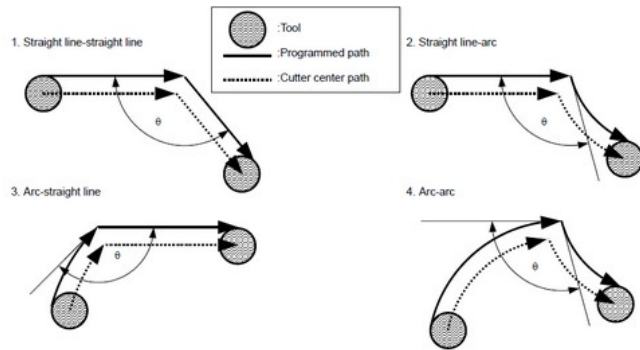

Automatic Corner Override

Features

During cutter compensation, the cutting feed is over-ridden at corners while maintaining material removal rates.

This function is a basic function in FANUC Series 0i-MF, 0i-PF, 0i-MF Plus and 0i-LF Plus.

Benefits

- Improved tool life
- Improved surface finish
- Improved accuracy

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J891 | 30i-B Automatic Corner Override |
| A02B-0326-J891 | 31i-B5 Automatic Corner Override |
| A02B-0327-J891 | 31i-B Automatic Corner Override |
| A02B-0328-J891 | 32i-B Automatic Corner Override |
| A02B-0333-J891 | 35i-B Automatic Corner Override |
| A02B-0353-J891 | 30i-BP Automatic Corner Override |
| A02B-0356-J891 | 31i-B5P Automatic Corner Override |
| A02B-0357-J891 | 31i-BP Automatic Corner Override |
| A02B-0358-J891 | 32i-BP Automatic Corner Override |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

309

Program Input

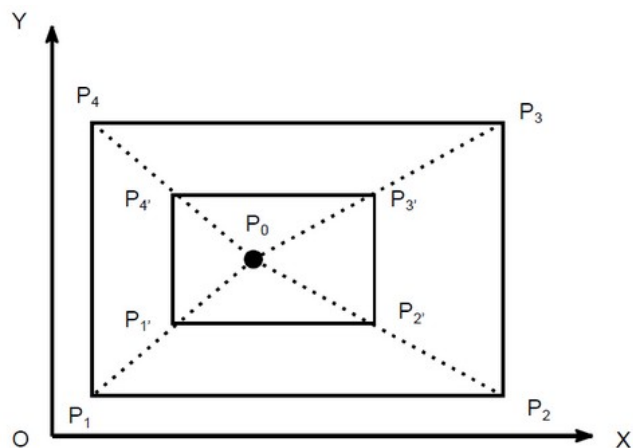

P_0 : Scaling center
 P_1 to P_4 : Programmed figure
 P_1' to P_4' : Scaled figure

Scaling

Features

Scaling is the function that allows the programmed shape to be magnified or reduced in size.

The dimensions specified with X_, Y_, and Z_ can each be scaled up or down with the same or different rates of magnification. The magnification rate can be specified in the program. Unless specified in the program, the magnification rate specified in the parameter is applied.

This function is a basic function in FANUC Series 0i-MF, 0i-PF, 0i-MF Plus and 0i-LF Plus.

Benefits

- Reduce program size
- Flexibility in programming
- Easy changes on shop floor
- Programming convenience

Ordering Information

| Specification | Description |
|----------------|-----------------|
| A02B-0323-J892 | 30i-B Scaling |
| A02B-0326-J892 | 31i-B5 Scaling |
| A02B-0327-J892 | 31i-B Scaling |
| A02B-0328-J892 | 32i-B Scaling |
| A02B-0353-J892 | 30i-BP Scaling |
| A02B-0356-J892 | 31i-B5P Scaling |
| A02B-0357-J892 | 31i-BP Scaling |
| A02B-0358-J892 | 32i-BP Scaling |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

310

Program Input

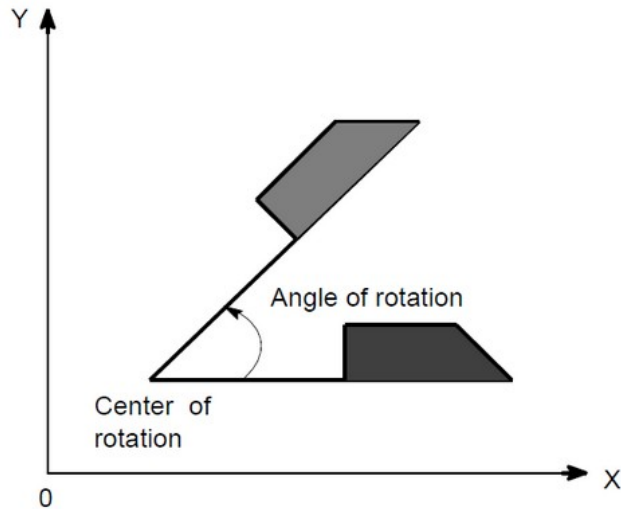

Coordinate System Rotation

Features

Programmed shape can be rotated by specifying the pivot point and desired angle.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Minimize set up time
- Reduce program size
- Flexibility in programming
- No need to line up fixtures/Vise jaws perfectly

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J893 | 30i-B Coordinate System Rotation |
| A02B-0326-J893 | 31i-B5 Coordinate System Rotation |
| A02B-0327-J893 | 31i-B Coordinate System Rotation |
| A02B-0328-J893 | 32i-B Coordinate System Rotation |
| A02B-0333-J893 | 35i-B Coordinate System Rotation |
| A02B-0353-J893 | 30i-BP Coordinate System Rotation |
| A02B-0356-J893 | 31i-B5P Coordinate System Rotation |
| A02B-0357-J893 | 31i-BP Coordinate System Rotation |
| A02B-0358-J893 | 32i-BP Coordinate System Rotation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

311

Program Input

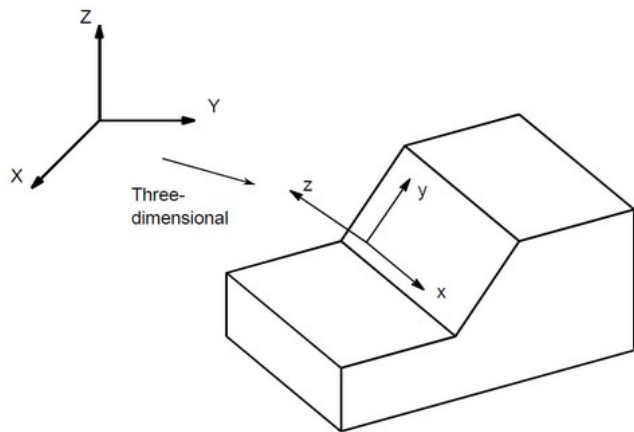

3-Dimensional Coordinate System Conversion

Features

Coordinate conversion about an axis can be carried out if the center of rotation, direction of the axis of rotation, and angular displacement are specified.

This function is very useful in three-dimensional machining by a die-sinking, or similar, machine. For example, by executing a program created on the XY plane after applying 3 Dimensional Coordinate Conversion, machining can be performed on an arbitrary plane in a three-dimensional space.

By specifying rigid tapping in the 3-dimensional coordinate conversion mode, a tapping operation can be performed in the angle direction specified by the 3-dimensional coordinate conversion command (3-dimensional rigid tapping).

Benefits

- Addition of 3D Coordinate Conversion to the CNC
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-J713 | 30i-B 3-D Coordinate System Conversion |
| A02B-0326-J713 | 31i-B5 3-D Coordinate System Conversion |
| A02B-0327-J713 | 31i-B 3-D Coordinate System Conversion |
| A02B-0328-J713 | 32i-B 3-D Coordinate System Conversion |
| A02B-0339-J713 | 0i-TF 3-Dimensional Coordinate System Conversion |
| A02B-0340-J713 | 0i-MF 3-D Coordinate System Conversion |
| A02B-0349-J713 | 0i-TFP 3-D Coordinate System Conversion |
| A02B-0350-J713 | 0i-MFP 3-D Coordinate System Conversion |
| A02B-0353-J713 | 30i-BP 3-D Coordinate System Conversion |
| A02B-0356-J713 | 31i-B5P 3-D Coordinate System Conversion |
| A02B-0357-J713 | 31i-BP 3-D Coordinate System Conversion |
| A02B-0358-J713 | 32i-BP 3-D Coordinate System Conversion |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

312

Program Input

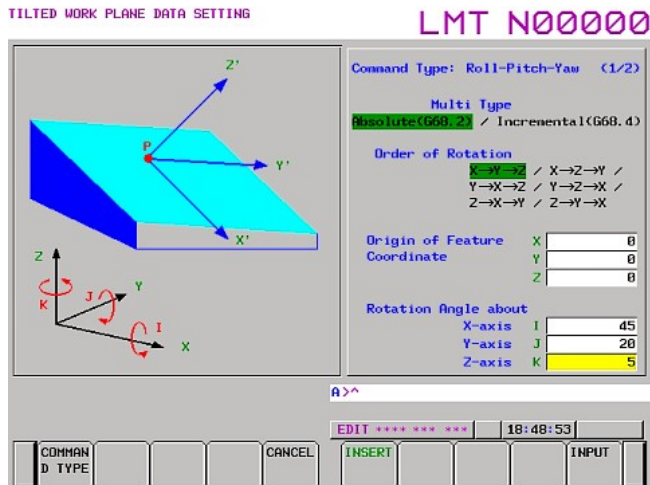

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Tilted Working Plane (TWP)

Features

Tilted Working Plane is used on 5 axes milling machines to define a plane, tilted relative to the machine table. When a figure such as a hole or pocket is cut on a plane, tilted relative to the reference surface of the workpiece, this function defines a coordinate system (referred to a "feature coordinate system") tied to the plane.

When specifying a position in such a coordinate system, a program can be created in a much easier way. A feature coordinate system is defined on a workpiece coordinate system. See the figure below for the relationship between a feature coordinate system and workpiece coordinate system.

This function is applicable to the "table type" machine configuration of the Robodrill.

Tilted Working Plane Command with Guidance

With this enhancement of the "Tilted Working Plane" command, the following commands can be programmed using a specific graphical screen:

- Euler's Angle
- Roll-Pitch-Yaw
- Three points
- Two vectors
- Projection angles

The guidance screen for tilted working plane command creates a tilted working plane command block after the machine operator has entered tilted working plane data on an interactive screen. With this function, a complicated tilted working plane command block can be easily created.

Benefits

- Addition of TWP command to the CNC
- Simplification of the programming for 5 axis machines
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-R522 | 30i-B Tilted Working Plane Indexing Command with Guidance |
| A02B-0326-R522 | 31i-B5 Tilted Working Plane Indexing Command with Guidance |
| A02B-0326-S676 | 31i-B5 Tilted Working Plane Command |

313

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0327-R522 | 31i-B Tilted Working Plane Indexing Command with Guidance |
| A02B-0328-R522 | 32i-B Tilted Working Plane Indexing Command with Guidance |
| A02B-0339-R522 | 0i-TF Tilted Working Plane Indexing Command |
| A02B-0340-R522 | 0i-MF Tilted Working Plane Indexing Command |
| A02B-0349-R522 | 0i-TFP Tilted Working Plane Indexing Command with Guidance |
| A02B-0350-R522 | 0i-MFP Tilted Working Plane Indexing Command with Guidance |
| A02B-0353-R522 | 30i-BP Tilted Working Plane Indexing Command with Guidance |
| A02B-0356-R522 | 31i-B5P Tilted Working Plane Indexing Command with Guidance |
| A02B-0357-R522 | 31i-BP Tilted Working Plane Indexing Command with Guidance |
| A02B-0358-R522 | 32i-BP Tilted Working Plane Indexing Command with Guidance |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

314

Program Input

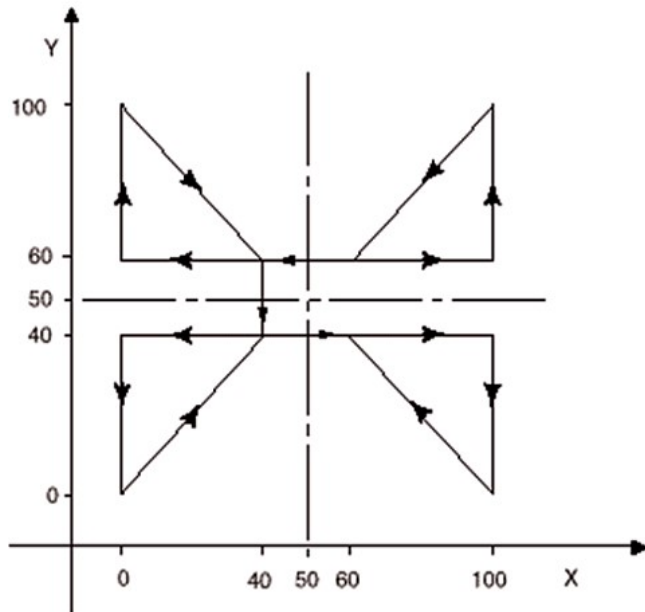

Programmable Mirror Image

Features

Programmed shape can be mirror imaged about the axis of symmetry.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Reduce Program size
- Flexibility in Programming
- Minimize math for creating programs
- Easy changes
- Real part programming convenience

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J880 | 30i-B Programmable Mirror Image |
| A02B-0326-J880 | 31i-B5 Programmable Mirror Image |
| A02B-0327-J880 | 31i-B Programmable Mirror Image |
| A02B-0328-J880 | 32i-B Programmable Mirror Image |
| A02B-0353-J880 | 30i-BP Programmable Mirror Image |
| A02B-0356-J880 | 31i-B5P Programmable Mirror Image |
| A02B-0357-J880 | 31i-BP Programmable Mirror Image |
| A02B-0358-J880 | 32i-BP Programmable Mirror Image |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

315

Program Input

Figure Copying

Features

Figure Copying is a function that allows machining to be repeated after moving or rotating the figure using a subprogram.

This can save part program storage space as multiple parts can be defined in one part program

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0323-J897 | 30i-B Figure Copying |
| A02B-0326-J897 | 31i-B5 Figure Copying |
| A02B-0327-J897 | 31i-B Figure Copying |
| A02B-0328-J897 | 32i-B Figure Copying |
| A02B-0340-J897 | 0i-MF Figure Copying |
| A02B-0350-J897 | 0i-MFP Figure Copying |
| A02B-0353-J897 | 30i-BP Figure Copying |
| A02B-0356-J897 | 31i-B5P Figure Copying |
| A02B-0357-J897 | 31i-BP Figure Copying |
| A02B-0358-J897 | 32i-BP Figure Copying |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

316

Program Input

Tape Format for Series 15 CNC

Features

Tape Format for FS15 allows a control to execute part programs written for the Series 15 control (certain limitations apply).

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Use existing programs created for Series 15 CNC

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-J882 | 30i-B Tape Format of CNC Series 15 |
| A02B-0326-J882 | 31i-B5 Tape Format of CNC Series 15 |
| A02B-0327-J882 | 31i-B Tape Format of CNC Series 15 |
| A02B-0328-J882 | 32i-B Tape Format of CNC Series 15 |
| A02B-0350-J882 | 0i-MFP Tape Format for FS 10/11/15 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

317

Program Input

Macro Executor

Features

Fixed program sequences, machining technology cycles, advanced machining sequences or frequently repeated patterns can be written as sub-programs. These sub-programs are called Macro Programs.

Macro Programs are written using an advanced extended language and structure; they also feature parameters and variables.

The Macro Programs (also called P-CODE Macro) are compiled in executable code using the Macro Compiler (refer to the software section of this catalogue for further details about the compiler).

The Macro Executor function provides to the CNC the capability to run the Macro Programs. Macro Programs are divided in 3 categories:

- Execution Macro functions
- Conversational Macro functions
- Auxiliary Macro functions

Execution Macro function

The Execution Macro function calls and executes the Macro Programs (P-CODE macro) from the Parts Program of the CNC using different methods (G, M, T or specific code as well as a program call).

Conversational Macro function

When the Conversational Macro function key is pressed on the MDI, the conversational macro function calls and executes a special macro program which is specialized in processing screens (conversational macro). The screen displayed by the program is called the conventional macro screen or user screen.

Auxiliary Macro function

At power-on, the Auxiliary Macro function calls and executes a macro program for performing auxiliary processing (auxiliary macro).

This function is a basic function in FANUC Series 0i-F Plus.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Benefits

- High speed execution: a macro program run as compiled executable and is fast, so that machining time can be reduced and machining precision can be improved.
- The P-CODE is stored in the CNC Flash ROM (F-ROM); it provides additional safety and reliability.
- A program compiled to the execution format cannot be displayed on the CNC program screen, so that the know-how related to the cycles can be protected.
- The user can call the execution Macro program with an easy call procedure
- An original screen can be created using graphic display. Screens can be selected by the use of soft keys.
- Possibility to create advanced machining cycles, interactive screens for operators, communication management, etc.
- Improvement of the machine efficiency and productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-J888 | 30i-B Macro Executor |
| A02B-0326-J888 | 31i-B5 Macro Executor |
| A02B-0327-J888 | 31i-B Macro Executor |
| A02B-0328-J888 | 32i-B Macro Executor |
| A02B-0329-J888 | 30i-LB Macro Executor |
| A02B-0330-J888 | 31i-LB Macro Executor |
| A02B-0331-J888 | 30i-PB Macro Executor |
| A02B-0332-J888 | 31i-PB Macro Executor |
| A02B-0333-R705 | 35i-B Macro Executor - Incl. Custom Software Size 512 kB |
| A02B-0334-R705 | PM i-A Macro Executor |
| A02B-0339-J888 | 0i-TF Macro Executor |
| A02B-0340-J888 | 0i-MF Macro Executor |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

319

Program Input

Extended Conversational Macro Function

Features

With the Extended Conversational Macro function, a set of macro instructions are available to improve the flexibility of the screen display / management.

Overview of the functions

- Window display
- Display of external characters at any position
- Display of 2-by-2 characters
- Shift and scale in the graphical coordinate system

Benefits

- Simplifies the programming of complex Human Machine Interfaces

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-S798 | 30i-B Extended Conversational Macro Function |
| A02B-0326-S798 | 31i-B5 Extended Conversational Macro Function |
| A02B-0327-S798 | 31i-B Extended Conversational Macro Function |
| A02B-0328-S798 | 32i-B Extended Conversational Macro Function |
| A02B-0339-S798 | 0i-TF Extended Conversational Macro Function |
| A02B-0340-S798 | 0i-MF Extended Conversational Macro Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

320

Program Input

Macro Executor + C-Language Executor

Features

Macro Executor

Fixed program sequences, machining technology cycles, advanced machining sequences or frequently repeated patterns can be written as sub-programs. These sub-programs are called Macro Programs.

Macro Programs are written using an advanced extended language and structure; they also feature parameters and variable.

The Macro programs (also called P-CODE Macro) are compiled in executable code using the Macro Compiler (refer to the software section of this catalogue for further details about the compiler).

The Macro Executor function provides to the CNC the capability to run the Macro Programs. Macro Programs are divided in 3 categories:

- Execution Macro functions
- Conversational Macro functions
- Auxiliary Macro functions

Execution Macro function

The Execution Macro function calls and executes the Macro Programs (P-CODE macro) from the Parts Program of the CNC using different methods (G, M, T or specific code as well as a program call).

Conversational Macro function

When the Conversational Macro function key is pressed on the MDI, the conversational macro function calls and executes a special macro program which is specialized in processing screens (conversational macro). The screen displayed by the program is called the conventional macro screen or user screen.

Auxiliary Macro function

At power-on, the Auxiliary Macro function calls and executes a macro program for performing auxiliary processing (auxiliary macro).

C-language Executor

The C-language executor function is used to customize screen display and implement a mechanism for user-specific operation as with the macro executor function. Instead of macro statements, application programs for display and operation can be created using the general C programming language. It also has all the benefits of the Macro executor.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

C-Language executor requires the selection of an amount of Custom Software Size storage space between 256kB and 12MB in the Flash Rom (F-ROM). The size of the memory depends on the CNC type and the options selected.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F Plus.

Benefits

- High speed execution: a macro program run as compiled executable and is fast, so that machining time can be reduced and machining precision can be improved.
- The P-CODE is stored in the CNC Flash ROM (F-ROM); it provides additional safety and reliability.
- A program compiled to the execution format cannot be displayed on the CNC program screen, so that the know-how related to the cycles can be protected.
- The user can call the execution Macro program with an easy call procedure
- An original screen can be created using graphic display. Screens can be selected by the use of soft keys.
- Possibility to create advanced machining cycles, interactive screens for operators, communication management, etc.

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------------------------------|
| A02B-0323-J734 | 30i-B Macro Executor and C-Language Executor |
| A02B-0326-J734 | 31i-B5 Macro Executor and C-Language Executor |
| A02B-0327-J734 | 31i-B Macro Executor and C-Language Executor |
| A02B-0328-J734 | 32i-B Macro Executor and C-Language Executor |
| A02B-0329-J734 | 30i-LB Macro Executor and C-Language Executor |
| A02B-0330-J734 | 31i-LB Macro Executor and C-Language Executor |
| A02B-0331-J734 | 30i-PB Macro Executor and C-Language Executor |
| A02B-0332-J734 | 31i-PB Macro Executor and C-Language Executor |
| A02B-0333-R706 | 35i-B Macro Executor and C-Language Executor - Incl. C-Language Executor Additional SRAM, Custom Software Size 2 MB |
| A02B-0334-R706 | PM i-A Macro Executor and C-Language Executor |
| A02B-0339-J734 | 0i-TF Macro and C-Language Executor |
| A02B-0340-J734 | 0i-MF Macro and C-Language Executor |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

322

Program Input

C Language Executor Additional SRAM

Features

If the Static Random Access Memory (SRAM) area required for applications created with the C-language executor exceeds the standard size, which is 63K bytes, the SRAM area can optionally be expanded.

Benefits

- Addition of additional processing memory for C-Language
- Increase of the processing capabilities
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-J736 | 30i-B C-Language Executor, Additional SRAM 256 kB |
| A02B-0323-S827 | 30i-B C-Language Executor, Additional SRAM 512 kB |
| A02B-0326-J736 | 31i-B5 C-Language Executor, Additional SRAM 256 kB |
| A02B-0326-S827 | 31i-B5 C-Language Executor, Additional SRAM 512 kB |
| A02B-0327-J736 | 31i-B C-Language Executor, Additional SRAM 256 kB |
| A02B-0327-S827 | 31i-B C-Language Executor, Additional SRAM 512 kB |
| A02B-0328-J736 | 32i-B C-Language Executor, Additional SRAM 256 kB |
| A02B-0328-S827 | 32i-B C-Language Executor Additional SRAM 512 KB |
| A02B-0333-J736 | 35i-B C-Language Executor, Additional SRAM 256 kB |
| A02B-0339-J736 | 0i-TF C-Language Executor, Additional SRAM 256 kB |
| A02B-0339-S827 | 0i-TF C-Language Executor, Additional SRAM 512 kB |
| A02B-0340-J736 | 0i-MF C-Language Executor, Additional SRAM 256 kB |
| A02B-0340-S827 | 0i-MF C-Language Executor Additional SRAM 512 kB |
| A02B-0349-J736 | 0i-TFP C-Language Executor Additional SRAM 256 kB |
| A02B-0349-S827 | 0i-TFP C-Language Executor Additional SRAM 512 kB |
| A02B-0350-J736 | 0i-MFP C-Language Executor Additional SRAM 256 kB |
| A02B-0350-S827 | 0i-MFP C-Language Executor Additional SRAM 512 kB |
| A02B-0353-J736 | 30i-BP C-Language Executor Additional SRAM 256 kB |
| A02B-0353-S827 | 30i-BP C-Language Executor Additional SRAM 512 kB |
| A02B-0356-J736 | 31i-B5P C-Language Executor Additional SRAM 256 kB |
| A02B-0356-S827 | 31i-B5P C-Language Executor Additional SRAM 512 kB |
| A02B-0357-J736 | 31i-BP C-Language Executor Additional SRAM 256 kB |
| A02B-0357-S827 | 31i-BP C-Language Executor Additional SRAM 512 kB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

323

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0358-J736 | 32i-BP C-Language Executor Additional SRAM 256 kB |
| A02B-0358-S827 | 32i-BP C-Language Executor Additional SRAM 512 kB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

324

Program Input

Middle-Level Task for C-Language Executor

Features

Middle-Level Task is the independent task of C Language Executor ordinary tasks (Main Task, Auxiliary Tasks and Window Task), and is a task executed at a constant start interval.

The processing time of Middle-Level Task is divided from the processing time allocated in High-Level Task according to the parameter, and Middle-Level Task can be executed as a task in addition to High-Level Task.

Start interval of Middle-Level Task can be selected by the parameter while the start interval of a High-Level Task is constant.

Benefits

- Addition of additional task management capabilities for the C-Language Executor
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-R550 | 30i-B Middle-Level Task of C-Language Executor |
| A02B-0326-R550 | 31i-B5 Middle-Level Task of C-Language Executor |
| A02B-0327-R550 | 31i-B Middle-Level Task of C-Language Executor |
| A02B-0328-R550 | 32i-B Middle-Level Task of C-Language Executor |
| A02B-0333-R550 | 35i-B Middle-Level Task of C-Language Executor |
| A02B-0334-R550 | PM i-A Middle-Level Task of C-Language Executor |
| A02B-0353-R550 | 30i-BP Middle-Level Task of C-Language Executor |
| A02B-0356-R550 | 31i-B5P Middle-Level Task of C-Language Executor |
| A02B-0357-R550 | 31i-BP Middle-Level Task of C-Language Executor |
| A02B-0358-R550 | 32i-BP Middle-Level Task of C-Language Executor |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

325

Program Input

Custom Software Size

Features

Custom Software Size is the size of custom software that can be used from the Macro Executor and C-Language Executor programs.

When a multi-path system is used, the total size required for all paths needs to be selected. This amount of space is reserved in the systems Flash-ROM (FROM) memory.

FANUC Series 30i-B Plus comes with 8MB Custom Software Size as a standard.
FANUC Series 0i-F Plus comes with 6MB Custom Software Size as a standard.

Benefits

- Addition of additional storage memory for C-Language
- Increase of the processing capabilities
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|---------------------|----------------------------------------------|
| A02B-0323-J738#12M | 30i-B Custom Software Size Main CPU, 12 MB |
| A02B-0323-J738#16M | 30i-B Custom Software Size, 16 MB |
| A02B-0323-J738#2M | 30i-B Custom Software Size Main CPU, 2 MB |
| A02B-0323-J738#4M | 30i-B Custom Software Size Main CPU, 4 MB |
| A02B-0323-J738#512K | 30i-B Custom Software Size Main CPU, 512 kB |
| A02B-0323-J738#6M | 30i-B Custom Software Size Main CPU, 6 MB |
| A02B-0323-J738#8M | 30i-B Custom Software Size Main CPU, 8 MB |
| A02B-0326-J738#12M | 31i-B5 Custom Software Size Main CPU, 12 MB |
| A02B-0326-J738#16M | 31i-B5 Custom Software Size, 16 MB |
| A02B-0326-J738#2M | 31i-B5 Custom Software Size Main CPU, 2 MB |
| A02B-0326-J738#4M | 31i-B5 Custom Software Size Main CPU, 4 MB |
| A02B-0326-J738#512K | 31i-B5 Custom Software Size Main CPU, 512 kB |
| A02B-0326-J738#6M | 31i-B5 Custom Software Size Main CPU, 6 MB |
| A02B-0326-J738#8M | 31i-B5 Custom Software Size Main CPU, 8 MB |
| A02B-0327-J738#12M | 31i-B Custom Software Size Main CPU, 12 MB |
| A02B-0327-J738#16M | 31i-B Custom Software Size, 16 MB |
| A02B-0327-J738#2M | 31i-B Custom Software Size Main CPU, 2 MB |
| A02B-0327-J738#4M | 31i-B Custom Software Size Main CPU, 4 MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|---------------------|---------------------------------------------|
| A02B-0327-J738#512K | 31i-B Custom Software Size Main CPU, 512 kB |
| A02B-0327-J738#6M | 31i-B Custom Software Size Main CPU, 6 MB |
| A02B-0327-J738#8M | 31i-B Custom Software Size Main CPU, 8 MB |
| A02B-0328-J738#12M | 32i-B Custom Software Size Main CPU, 12 MB |
| A02B-0328-J738#16M | 32i-B Custom Software Size, 16 MB |
| A02B-0328-J738#2M | 32i-B Custom Software Size Main CPU, 2 MB |
| A02B-0328-J738#4M | 32i-B Custom Software Size Main CPU, 4 MB |
| A02B-0328-J738#512K | 32i-B Custom Software Size Main CPU, 512 kB |
| A02B-0328-J738#6M | 32i-B Custom Software Size Main CPU, 6 MB |
| A02B-0328-J738#8M | 32i-B Custom Software Size Main CPU, 8 MB |
| A02B-0333-J738#12M | 35i-B Custom Software Size Main CPU, 12 MB |
| A02B-0333-J738#2M | 35i-B Custom Software Size Main CPU, 2 MB |
| A02B-0333-J738#4M | 35i-B Custom Software Size Main CPU, 4 MB |
| A02B-0333-J738#6M | 35i-B Custom Software Size Main CPU, 6 MB |
| A02B-0333-J738#8M | 35i-B Custom Software Size Main CPU, 8 MB |
| A02B-0334-J738#12M | PM i-A Custom Software Size, 12 MB |
| A02B-0334-J738#2M | PM i-A Custom Software Size, 2 MB |
| A02B-0334-J738#4M | PM i-A Custom Software Size, 4 MB |
| A02B-0334-J738#6M | PM i-A Custom Software Size, 6 MB |
| A02B-0334-J738#8M | PM i-A Custom Software Size, 8 MB |
| A02B-0339-J738#12M | 0i-TF Custom Software Size: 12 MB |
| A02B-0339-J738#16M | 0i-TF Custom Software Size: 16 MB |
| A02B-0339-J738#2M | 0i-TF Custom Software Size: 2 MB |
| A02B-0339-J738#4M | 0i-TF Custom Software Size: 4 MB |
| A02B-0339-J738#512K | 0i-TF Custom Software Size: 512 kB |
| A02B-0339-J738#6M | 0i-TF Custom Software Size: 6 MB |
| A02B-0339-J738#8M | 0i-TF Custom Software Size: 8 MB |
| A02B-0340-J738#12M | 0i-MF Custom Software Size: 12 MB |
| A02B-0340-J738#16M | 0i-MF Custom Software Size: 16 MB |
| A02B-0340-J738#2M | 0i-MF Custom Software Size: 2 MB |
| A02B-0340-J738#4M | 0i-MF Custom Software Size: 4 MB |
| A02B-0340-J738#512K | 0i-MF Custom Software Size: 512 kB |
| A02B-0340-J738#6M | 0i-MF Custom Software Size: 6 MB |
| A02B-0340-J738#8M | 0i-MF Custom Software Size: 8 MB |
| A02B-0349-J738#12M | 0i-TFP Custom Software Size 12 MB |
| A02B-0349-J738#16M | 0i-TFP Custom Software Size 16 MB |
| A02B-0349-J738#8M | 0i-TFP Custom Software Size 8 MB |
| A02B-0350-J738#12M | 0i-MFP Custom Software Size 12 MB |
| A02B-0350-J738#16M | 0i-MFP Custom Software Size 16 MB |
| A02B-0350-J738#8M | 0i-MFP Custom Software Size 8 MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

327


| Specification | Description |
|--------------------|------------------------------------|
| A02B-0353-J738#12M | 30i-BP Custom Software Size 12 MB |
| A02B-0353-J738#16M | 30i-BP Custom Software Size 16 MB |
| A02B-0356-J738#12M | 31i-B5P Custom Software Size 12 MB |
| A02B-0356-J738#16M | 31i-B5P Custom Software Size 16 MB |
| A02B-0357-J738#12M | 31i-BP Custom Software Size 12 MB |
| A02B-0357-J738#16M | 31i-BP Custom Software Size 16 MB |
| A02B-0358-J738#12M | 32i-BP Custom Software Size 12 MB |
| A02B-0358-J738#16M | 32i-BP Custom Software Size 16 MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

328 Program Input

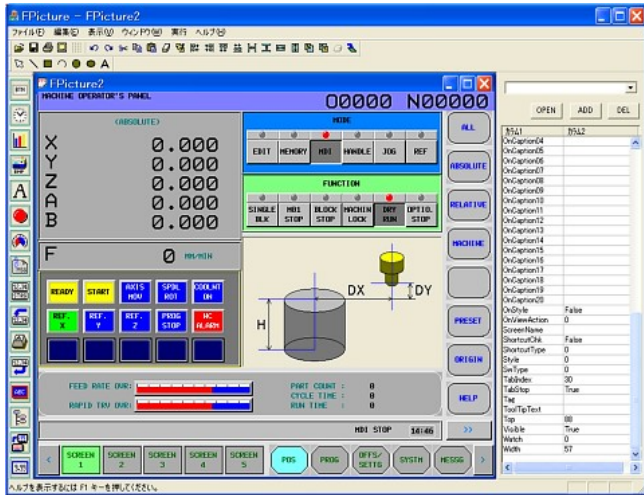

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

FANUC PICTURE Executor

Features

FANUC PICTURE Executor is a function in the CNC allowing the execution of HMI projects created by the FANUC PICTURE for Windows® software. The required custom software size has to be ordered separately.

FANUC PICTURE provides an easy way to create custom operator and HMI screens to drive a complex process. The screens are created using a development software called FANUC PICTURE for Windows®. The software has all the functions and features of modern HMI software tools, supports objects, animations, data, multi-language and also feature a macro language to run routines to perform tasks.

The screens are compiled and stored in the CNC Flash-ROM (FROM) memory and are rendered directly by the CNC without requiring any Windows operating system or runtime.

FANUC PICTURE supports multi-language projects; on multi-language projects, the language of the HMI application can be switched on the fly by the operator.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F Plus.

Benefits


- Easy screen customization capabilities
- Simplification of the operator work on production machine
- Reduction of operation error on production machines
- Simplification of the machine and process control
- Improvement of the overall machine or production line productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-R644 | 30i-B FANUC PICTURE Executor |
| A02B-0326-R644 | 31i-B5 FANUC PICTURE Executor |
| A02B-0327-R644 | 31i-B FANUC PICTURE Executor |
| A02B-0328-R644 | 32i-B FANUC PICTURE Executor |
| A02B-0333-R644 | 35i-B FANUC PICTURE Executor |
| A02B-0334-R644 | PM i-A FANUC PICTURE Executor |
| A02B-0339-R644 | 0i-TF FANUC Picture Executor |
| A02B-0340-R644 | 0i-MF FANUC Picture Executor |

329

Program Input

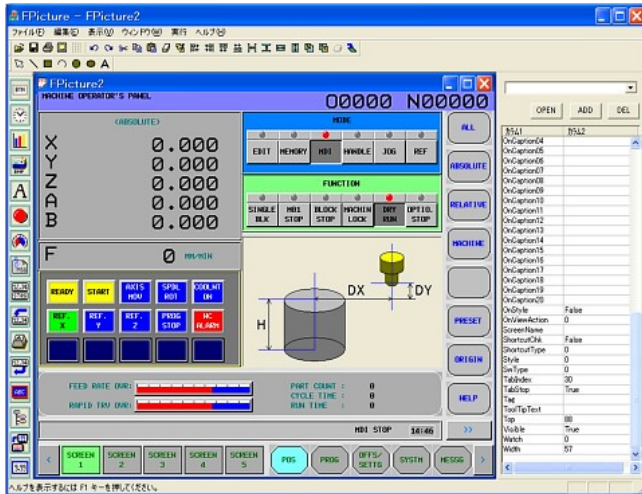

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

FANUC PICTURE Function

Features

The FANUC PICTURE function allows the execution of HMI projects in the CNC which are created by the FANUC PICTURE for Windows® software. FANUC PICTURE function includes 6MB of custom software size to store the compiled screens in the CNC. This function cannot be used together with the C-language executor function in the CNC. In case of this, the FANUC PICTURE executor should be used instead.

FANUC PICTURE provides an easy way to create custom operator and HMI screens to drive a complex process. The screens are created using a development software called FANUC PICTURE for Windows®. The software has all the functions and features of modern HMI software tools, supports objects, animations, data, multi-language and also feature a macro language to run routines to perform tasks.

The screens are compiled and stored in the CNC Flash-ROM (FROM) memory and are rendered directly by the CNC without requiring any Windows operating system or runtime.

FANUC PICTURE supports multi-language projects; on multi-language projects, the language of the HMI application can be switched on the fly by the operator.

Benefits

- Easy screen customization capabilities
- Simplification of the operator work on production machine
- Reduction of operation error on production machines
- Simplification of the machine and process control
- Improvement of the overall machine or production line productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-S879 | 30i-B FANUC PICTURE Function - Touch Panel Display |
| A02B-0323-S944 | 30i-B FANUC PICTURE Function - Non-Touch Panel Display |
| A02B-0326-S879 | 31i-B5 FANUC PICTURE Function - Touch Panel Display |
| A02B-0326-S944 | 31i-B5 FANUC PICTURE Function - Non-Touch Panel Display |
| A02B-0327-S879 | 31i-B FANUC PICTURE Function - Touch Panel Display |
| A02B-0327-S944 | 31i-B FANUC PICTURE Function - Non-Touch Panel Display |
| A02B-0328-S879 | 32i-B FANUC PICTURE Function - Touch Panel Display |
| A02B-0328-S944 | 32i-B FANUC PICTURE Function - Non-Touch Panel Display |
| A02B-0339-S879 | 0i-TF FANUC Picture Function |
| A02B-0339-S944 | 0i-TF FANUC Picture Function for Non-Touch Panel Display |

330

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0340-S879 | 0i-MF FANUC Picture Function |
| A02B-0340-S944 | 0i-MF FANUC Picture Function for Non-Touch Panel Display |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

331 Program Input

FANUC PICTURE Function for Series 35i-B

Features

The FANUC PICTURE function for Series 35i allows the execution of HMI projects in the CNC which are created by the FANUC PICTURE for Windows® software. FANUC PICTURE function for Series 35i includes the following options:

- 6 MB custom software size
- FANUC PICTURE executor
- Touch panel control
- Virtual MDI key

FANUC PICTURE provides an easy way to create custom operator and HMI screens to drive a complex process. The screens are created using a development software called FANUC PICTURE for Windows. The software has all the functions and features of modern HMI software tools, supports objects, animations, data, multi-language and also feature a macro language to run routines to perform tasks.

The screens are compiled and stored in the CNC F-ROM memory and are rendered directly by the CNC without requiring any Windows operating system or runtime.

FANUC PICTURE supports multi-language projects which can be switched on the fly.

Benefits

- Easy screen customization capabilities
- Simplification of the operator work on production machine
- Reduction of operation error on production machines
- Simplification of the machine and process control
- Improvement of the overall machine or production line productivity


Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0333-R708 | 35i-B FANUC PICTURE Function - Touch Panel Display |

Notice


Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

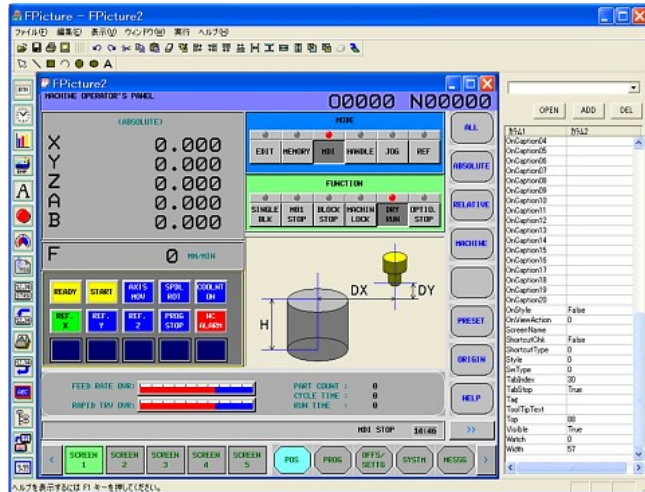

332

Program Input

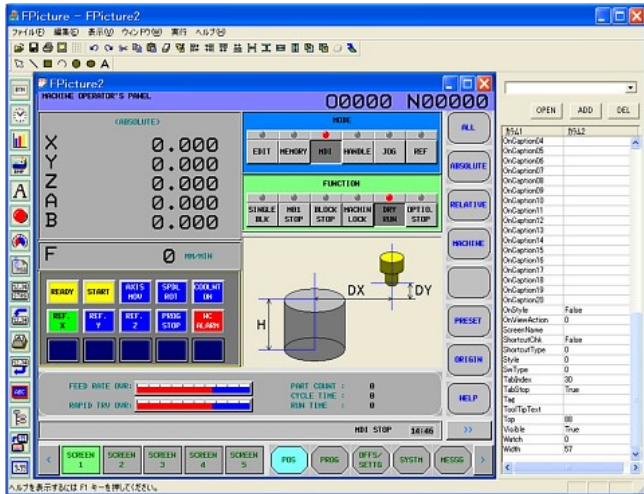

FANUC PICTURE Function for Power Motion i-A

Features

The FANUC PICTURE function for Power Motion i allows the execution of HMI projects in the CNC which are created by the FANUC PICTURE for Windows® software. FANUC PICTURE function for Power Motion i includes the following options:

- 6 MB custom software size
- FANUC PICTURE executor
- Touch panel control
- Virtual MDI key

FANUC PICTURE provides an easy way to create custom operator and HMI screens to drive a complex process. The screens are created using a development software called FANUC PICTURE for Windows. The software has all the functions and features of modern HMI software tools, supports objects, animations, data, multi-language and also feature a macro language to run routines to perform tasks.

The screens are compiled and stored in the CNC F-ROM memory and are rendered directly by the CNC without requiring any Windows operating system or runtime.

FANUC PICTURE supports multi-language projects which can be switched on the fly.

Benefits

- Easy screen customization capabilities
- Simplification of the operator work on production machine
- Reduction of operation error on production machines
- Simplification of the machine and process control
- Improvement of the overall machine or production line productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0334-R708 | PM i-A FANUC PICTURE Function - Touch Panel Display |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

333

Program Input

Embedded Macro

Features

This function protects a program created by a machine tool builder, by storing the program in an exclusive folder to embedded macros (hereinafter referred to as an MTB1 folder) and assigning an attribute to the folder.

At the same time, the following functions are available:

- An exclusive program memory capacity of 100K bytes (corresponding to about 260 m) is provided in addition the ordinary program memory capacity. The number of registerable programs remains unchanged from the ordinary number of registerable programs.
- Attributes such as edit lock and edit/display lock can be assigned to the MTB1 folder. In addition, a set values can be locked using an exclusive password.
- A program stored in the MTB1 folder can be called based on a M/T codes or G code; subprogram can be called using M code.
- Custom macro common variables (#200 to #499) are added.

Benefits

- Protection of programs

Ordering Information

| Specification | Description |
|---------------------|-------------------------------|
| A02B-0323-S652#128K | 30i-B Embedded Macro, 128 kB |
| A02B-0326-S652#128K | 31i-B5 Embedded Macro, 128 kB |
| A02B-0327-S652#128K | 31i-B Embedded Macro, 128 kB |
| A02B-0328-S652#128K | 32i-B Embedded Macro, 128 kB |
| A02B-0339-S652#128K | 0i-TF Embedded Macro |
| A02B-0340-S652#128K | 0i-MF Embedded Macro |
| A02B-0349-S652#128K | 0i-TFP Embedded Macro |
| A02B-0350-S652#128K | 0i-MFP Embedded Macro |
| A02B-0353-S652#128K | 30i-BP Embedded Macro |
| A02B-0356-S652#128K | 31i-B5P Embedded Macro |
| A02B-0357-S652#128K | 31i-BP Embedded Macro |
| A02B-0358-S652#128K | 32i-BP Embedded Macro |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.



The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

334




Program Input

G83 X_ Y_ Z_ R_ Q_ F_ L_ K_ P ;

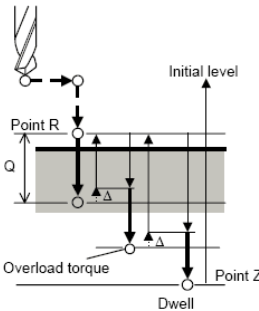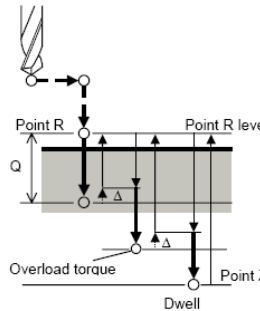X_ Y_ : Hole position data
 Z_ : Distance from point R to the bottom of the hole
 R_ : Distance from the initial level to point R
 Q_ : Depth of each cut
 F_ : Cutting feedrate
 L_ : Forward or backward traveling speed (same format as F above)
 (If this is omitted, the values in parameters No.5172 and No.5173 are assumed as defaults.)
 K_ : Number of times the operation is repeated (if required)
 P_ : Dwell time at the bottom of the hole
 (If this is omitted, P0 is assumed as the default.)

| G83 (G98) | G83 (G99) |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |

Δ: Initial clearance when the tool is retracted to point R and the clearance from the bottom of the hole in the second or subsequent drilling (parameter 5174)
 Q: Depth of each cut

 Path along which the tool travels at the rapid traverse rate
 Path along which the tool travels at the programmed cutting feedrate
 Path along which the tool travels at the forward or backward rate during the cycle specified with parameters

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Small Hole Peck Drilling Cycle

Features

The Small Hole Peck Drilling Cycle performs a drilling operation that periodically retracts the tool above the parts surface (to a clearance position) to clear chips or flood the hole with coolant until the desired hole depth is reached.

This function is a basic function in FANUC Series 0i-MF (Type 1, Type 3) and 0i-MF Plus (Type 0, 1 and 3).

Benefits

- Simplified Programming


Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J896 | 30i-B Small-Hole Peck Drilling Cycle |
| A02B-0326-J896 | 31i-B5 Small Hole Peck Drilling Cycle |
| A02B-0327-J896 | 31i-B Small Hole Peck Drilling Cycle |
| A02B-0328-J896 | 32i-B Small Hole Peck Drilling Cycle |
| A02B-0333-J896 | 35i-B Small Hole Peck Drilling Cycle |
| A02B-0350-J896 | 0i-MFP Small Hole Peck Drilling Cycle |
| A02B-0353-J896 | 30i-BP Small Hole Peck Drilling Cycle |
| A02B-0356-J896 | 31i-B5P Small Hole Peck Drilling Cycle |
| A02B-0357-J896 | 31i-BP Small-Hole Peck Drilling Cycle |


335

Program Input

Traverse grinding cycle
(G71, G72)

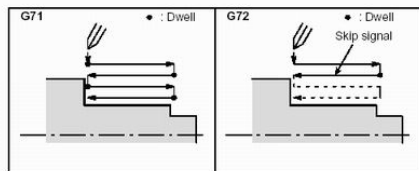

Oscillating grinding cycle
(G73, G74)

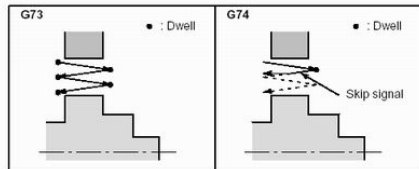

Canned Cycle for Grinding

Features

Canned Cycles for Grinding provides an easier way for the programmer to create programs for grinding.

With a canned grinding cycle, repetitive operations peculiar to grinding can be specified in a single block with a G function. The repetitive machining specific to grinding can be specified by one block. Since four types of canned cycles are provided for grinding, programming is simplified.

Benefits

- Simplified Programming

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-S974 | 30i-B Canned Cycle for Grinding |
| A02B-0326-S974 | 31i-B5 Canned Cycle for Grinding |
| A02B-0327-S974 | 31i-B Canned Cycle for Grinding |
| A02B-0328-S974 | 32i-B Canned Cycle for Grinding |
| A02B-0353-S974 | 30i-BP Canned Cycle for Grinding |
| A02B-0356-S974 | 31i-B5P Canned Cycle for Grinding |
| A02B-0357-S974 | 31i-BP Canned Cycle for Grinding |
| A02B-0358-S974 | 32i-BP Canned Cycle for Grinding |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

336

Program Input

Real Time Custom Macro

Features

Used with an NC program, the real time custom macro function controls peripheral axes and signals.

If a macro statement is used together with an NC statement, a program using the conventional custom macro function executes the macro statement immediately when the macro statement is read. So, the macro statement cannot be executed independently of the NC statement.

On the other hand, the real time custom macro function enables the following control operations when a real time macro command (RTM command) is coded in an NC program.

Key functions

- A real time macro command starts operation in synchronism with the NC statement and is executed independently. During NC program execution, a real time macro command can be executed at the same time.
- PMC interface signals can be read and written (with a restriction). In an NC program, a motion using a signal as a trigger can be coded
- Variables dedicated to a real time macro command can be read and written
- A real time macro command can exercise axis control
- Multiple real time macro commands can be executed at the same time. Multiple real time custom macro statements can be coded in an NC program and can be controlled independently of each other

Benefits

- Simplified Programming

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-S842 | 30i-B Real Time Custom Macro |
| A02B-0326-S842 | 31i-B5 Real Time Custom Macro |
| A02B-0327-S842 | 31i-B Real Time Custom Macro |
| A02B-0328-S842 | 32i-B Real Time Custom Macro |
| A02B-0339-S842 | 0i-TF Real Time Custom Macro |
| A02B-0340-S842 | 0i-MF Real Time Custom Macro |
| A02B-0349-S842 | 0i-TFP Real Time Custom Macro |
| A02B-0350-S842 | 0i-MFP Real Time Custom Macro |
| A02B-0353-S842 | 30i-BP Real Time Custom Macro |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

337

| Specification | Description |
|----------------|--------------------------------|
| A02B-0356-S842 | 31i-B5P Real Time Custom Macro |
| A02B-0357-S842 | 31i-BP Real Time Custom Macro |
| A02B-0358-S842 | 32i-BP Real Time Custom Macro |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

338

Program Input

Dual Feedrate Command

Features

With Dual Feedrate Command, you can specify different feedrates for 2 linear axes in one G01 block independently. Depending on the application, the simultaneous start of two cutting movements with different feedrates can reduce cycle time. Dual Feedrate Command eliminates the need for a 2nd path for this kind of operation. And as the command can be issued in one block, programming is simplified.

Benefits

- Reduce cycle time
- Reduce no. of paths
- Easy programming

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-R369 | 30i-B Dual Feedrate Command |
| A02B-0326-R369 | 31i-B5 Dual Feedrate Command |
| A02B-0327-R369 | 31i-B Dual Feedrate Command |
| A02B-0328-R369 | 32i-B Dual Feedrate Command |
| A02B-0339-R369 | 0i-TF Dual Feedrate Command |
| A02B-0340-R369 | 0i-MF Dual Feedrate Command |
| A02B-0349-R369 | 0i-TFP Dual Feedrate Command |
| A02B-0350-R369 | 0i-MFP Dual Feedrate Command |
| A02B-0353-R369 | 30i-BP Dual Feedrate Command |
| A02B-0356-R369 | 31i-B5P Dual Feedrate Command |
| A02B-0357-R369 | 31i-BP Dual Feedrate Command |
| A02B-0358-R369 | 32i-BP Dual Feedrate Command |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

339

Program Input

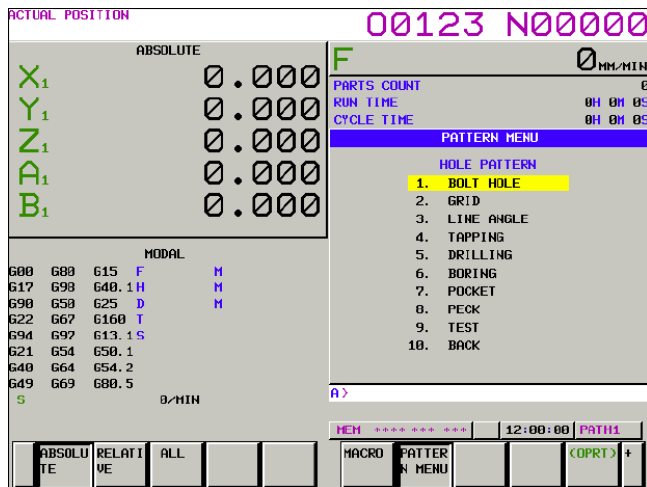

Pattern Data Input

Features

With the Pattern Data Input function, a part program can be created from a selected menu with the possibility to enter data on conversational screens.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- No need for extensive G code knowledge
- Conversational screens for standard cycles
- Simplifies part programming

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0323-J884 | 30i-B Pattern Data Input |
| A02B-0326-J884 | 31i-B5 Pattern Data Input |
| A02B-0327-J884 | 31i-B Pattern Data Input |
| A02B-0328-J884 | 32i-B Pattern Data Input |
| A02B-0349-J884 | 0i-TFP Pattern Data Input |
| A02B-0350-J884 | 0i-MFP Pattern Data Input |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

340

Program Input

M-Code Protect Function

Features

Execution of some specific M-codes (miscellaneous function) is permitted only when commanded in the macro program which is called as macro.

With this function, specific M-codes, which are used in the macro program for machine control, can be protected from the illegal use in user machining program.

Benefits

- Simplified Programming

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-R594 | 30i-B M-Code Protect Function |
| A02B-0326-R594 | 31i-B5 M-Code Protect Function |
| A02B-0327-R594 | 31i-B M-Code Protect Function |
| A02B-0328-R594 | 32i-B M-Code Protect Function |
| A02B-0339-R594 | 0i-TF M-Code Protect Function |
| A02B-0340-R594 | 0i-MF M-Code Protect Function |
| A02B-0349-R594 | 0i-TFP M-Code Protect Function |
| A02B-0350-R594 | 0i-MFP M-Code Protect Function |
| A02B-0353-R594 | 30i-BP M-Code Protect Function |
| A02B-0356-R594 | 31i-B5P M-Code Protect Function |
| A02B-0357-R594 | 31i-BP M-Code Protect Function |
| A02B-0358-R594 | 32i-BP M-Code Protect Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

341

Program Input

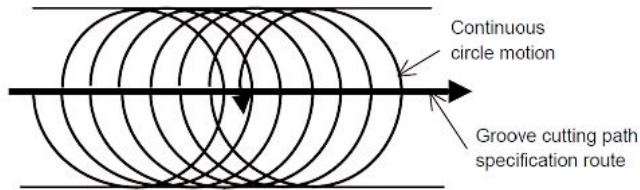

Groove Cutting Function by Continuous Circle Movement

Features

Groove cutting with a width greater than the tool diameter can be performed by causing the tool to make continuous circle motion independently of axis movement by the groove cutting path program and superposing the continuous circle motion on the axis movement by the groove cutting path program.

Benefits

- Simplification of the programming

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------|
| A02B-0323-S854 | 30i-B Groove Cutting Function by Continuous Circle Movement |
| A02B-0326-S854 | 31i-B5 Groove Cutting Function by Continuous Circle Movement |
| A02B-0327-S854 | 31i-B Groove Cutting Function by Continuous Circle Movement |
| A02B-0353-S854 | 30i-BP Groove Cutting Function by Continuous Circle Movement |
| A02B-0356-S854 | 31i-B5P Groove Cutting Function by Continuous Circle Movement |
| A02B-0357-S854 | 31i-BP Groove Cutting Function by Continuous Circle Movement |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

342

Program Input

Extended P-Code Variables Size

Features

This function increases the total number of available P-code variables and extended P-code variables for Macro Executor.

Benefits

- Increase the processing capabilities of Macro Executor

Ordering Information

| Specification | Description |
|---------------------|-----------------------------------------------|
| A02B-0323-J739#1M | 30i-B Extended P-Code Variables Size 1 MB |
| A02B-0323-J739#256K | 30i-B Extended P-Code Variables Size 256 kB |
| A02B-0323-J739#512K | 30i-B Extended P-Code Variables Size 512 kB |
| A02B-0326-J739#1M | 31i-B5 Extended P-Code Variables Size 1 MB |
| A02B-0326-J739#256K | 31i-B5 Extended P-Code Variables Size 256 kB |
| A02B-0326-J739#512K | 31i-B5 Extended P-Code Variables Size 512 kB |
| A02B-0333-J739#1M | 35i-B Extended P-Code Variables Size 1 MB |
| A02B-0333-J739#256K | 35i-B Extended P-Code Variables Size 256 kB |
| A02B-0333-J739#512K | 35i-B Extended P-Code Variables Size 512 kB |
| A02B-0334-J739#1M | PM i-A Extended P-Code Variables Size 1 MB |
| A02B-0334-J739#256K | PM i-A Extended P-Code Variables Size 256 kB |
| A02B-0334-J739#512K | PM i-A Extended P-Code Variables Size 512 kB |
| A02B-0339-J739#256K | 0i-TF Extended P-Code Variables Size 256 kB |
| A02B-0339-J739#512K | 0i-TF Extended P-Code Variables Size 512 kB |
| A02B-0340-J739#256K | 0i-MF Extended P-Code Variables Size 256 kB |
| A02B-0340-J739#512K | 0i-MF Extended P-Code Variables Size 512 kB |
| A02B-0353-J739#1M | 30i-BP Extended P-Code Variables Size 1 MB |
| A02B-0353-J739#256K | 30i-BP Extended P-Code Variables Size 256 kB |
| A02B-0353-J739#512K | 30i-BP Extended P-Code Variables Size 512 kB |
| A02B-0356-J739#1M | 31i-B5P Extended P-Code Variables Size 1 MB |
| A02B-0356-J739#256K | 31i-B5P Extended P-Code Variables Size 256 kB |
| A02B-0356-J739#512K | 31i-B5P Extended P-Code Variables Size 512 kB |
| A02B-0357-J739#1M | 31i-BP Extended P-Code Variables Size 1 MB |
| A02B-0357-J739#256K | 31i-BP Extended P-Code Variables Size 256 kB |
| A02B-0357-J739#512K | 31i-BP Extended P-Code Variables Size 512 kB |
| A02B-0358-J739#1M | 32i-BP Extended P-Code Variables Size 1 MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

343

| Specification | Description |
|---------------------|----------------------------------------------|
| A02B-0358-J739#256K | 32i-BP Extended P-Code Variables Size 256 kB |
| A02B-0358-J739#512K | 32i-BP Extended P-Code Variables Size 512 kB |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

344

Program Input

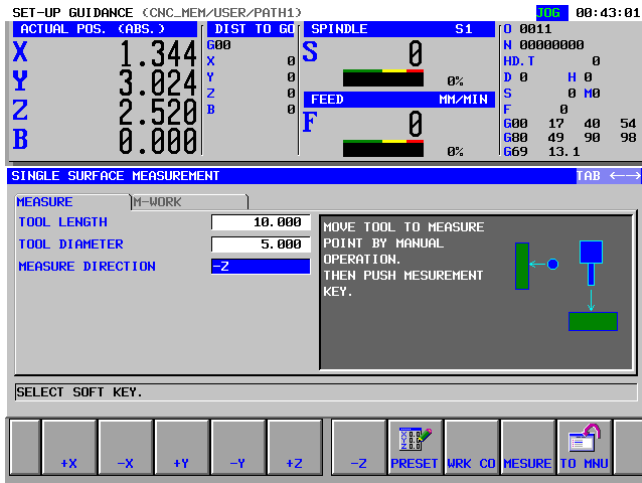

Set-Up Guidance Function

Features

With this function, it is possible to measure the position of a workpiece with a usual milling tool or a centering bar, and to set the measured positions to the work coordinate system. A guidance screen leads the operator through the measurement sequence.

It is possible to measure workpiece positions without a measurement probe. The ladder program need not to be adapted to use a measurement probe.

This function is a basic function in FANUC Series 0i-MF Plus.

Benefits

- Simplifies the set-up procedure on basic milling machines

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0340-S771 | 0i-MF Set-up Guidance Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

345

Program Input

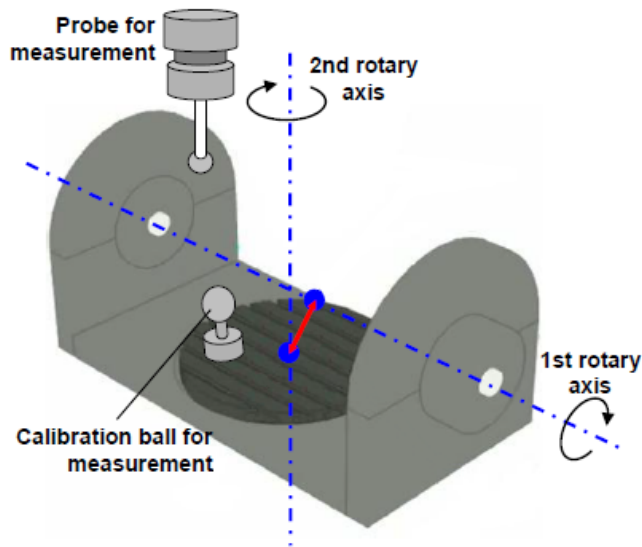

Execution Macro of Measurement Cycle

Features

Measurement cycles are basically subprograms that solve specific measurement tasks. Together with measurement devices such as a touch probe, measurement cycles are used to gauge the dimensions of a tool or workpiece, or to measure the exact position of a blank. On 5-axis machines, measurement cycles can also be used to find the center of rotation for rotary axes.

The Execution Macro for Measurement Cycle function provides 99 measurement cycles for all necessary measurement tasks. The cycles are parametrized by P-CODE variables. Execution Macro for Measurement Cycle lets you monitor workpiece quality by automatic measurements.

Benefits

- Execute complex measurement operations easily
- Increase the accuracy of machined parts
- Reduce set-up time

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-R336 | 30i-B Execution Macro of Measurement Cycle |
| A02B-0326-R336 | 31i-B5 Execution Macro of Measurement Cycle |
| A02B-0327-R336 | 31i-B Execution Macro of Measurement Cycle |
| A02B-0328-R336 | 32i-B Execution Macro of Measurement Cycle |
| A02B-0353-R336 | 30i-BP Execution Macro of Measurement Cycle |
| A02B-0356-R336 | 31i-B5P Execution Macro of Measurement Cycle |
| A02B-0357-R336 | 31i-BP Execution Macro of Measurement Cycle |
| A02B-0358-R336 | 32i-BP Execution Macro of Measurement Cycle |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

346

Program Input

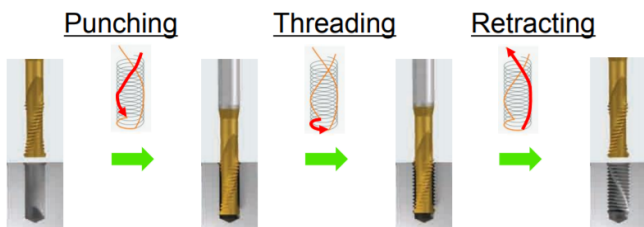

Punch Tapping Function

Features

The Punch Tapping function is an extension of Canned Cycles for Drilling. It contains special tapping cycles which are used together with Punch Tap tools.

The Punch Tap technology is a new way of threading called helical thread forming. It uses a specific tool geometry with a punch tooth and a specific toolpath to plunge rapidly, creating a helical groove. The thread is broached in a single half-turn. Then the tool retracts rapidly, following the contour of the helical groove.

Punch Tapping shortens cycle time and consumes less energy compared to conventional threading technologies, reducing costs of threading.

Benefits

- Reduce cycle time
- Reduce energy consumption

Spindles controlled with servo motor and analog spindles are not supported.

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-R168 | 30i-B Punch Tapping Function |
| A02B-0326-R168 | 31i-B5 Punch Tapping Function |
| A02B-0327-R168 | 31i-B Punch Tapping Function |
| A02B-0328-R168 | 32i-B Punch Tapping Function |
| A02B-0340-R168 | 0i-MF Punch Tapping Function |
| A02B-0350-R168 | 0i-MFP Punch Tapping Function |
| A02B-0353-R168 | 30i-BP Punch Tapping Function |
| A02B-0356-R168 | 31i-B5P Punch Tapping Function |
| A02B-0357-R168 | 31i-BP Punch Tapping Function |
| A02B-0358-R168 | 32i-BP Punch Tapping Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

347 Functions

Integrated Operation & Programming Guidance Functions

FANUC products and solutions reflect over 50 years of experience in machine tools, conversational / interactive programming and part programming on the shop floor. The straightforward design of the operation screens allows fast, simple and user friendly operation.

Without particular knowledge of G-code programming, it is possible to generate part programs, just by answering simple questions.

Enhanced simulation capabilities are also provided to verify the part programs without moving the axes.

Interactive programming solutions detailed in this catalogue:

- MANUAL GUIDE i for Series 30i and Series 0i CNC
- MANUAL GUIDE 0i for Series 0i CNC
- TURN MATE i for Series 0i CNC



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

348

Integrated Operation & Programming Guidance Functions



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

iHMI Basic Function

Features

iHMI is FANUC's new user interface. It has been designed to be extremely easy to use. Intuitive menu icons, high-visibility design and animate features take the head-scratching out of complex machining operations, making accessing even the most sophisticated programs and functionalities straightforward. Despite its more intuitive layout, users will nevertheless find that it provides a familiar FANUC user experience.

This option is necessary to use the iHMI user interface.

This function is a basic function in FANUC Series 0i-F Plus (Type 0).

Benefits


- Easy and simple operation
- Intuitive icons and high-visibility design
- Easy troubleshooting

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-R901 | 30i-B iHMI Basic Function |
| A02B-0326-R901 | 31i-B5 iHMI Basic Function |
| A02B-0327-R901 | 31i-B iHMI Basic Function |
| A02B-0328-R901 | 32i-B iHMI Basic Function |
| A02B-0329-R901 | 30i-LB iHMI Basic Function |
| A02B-0330-R901 | 31i-LB iHMI Basic Function |
| A02B-0331-R901 | 30i-PB iHMI Basic Function |
| A02B-0332-R901 | 31i-PB iHMI Basic Function |
| A02B-0333-R901 | 35i-B iHMI Basic Function |
| A02B-0334-R906 | iHMI Basic Function for Power Motion i-A |
| A02B-0353-R901 | 30i-BP iHMI Basic Function |
| A02B-0356-R901 | 31i-B5P iHMI Basic Function |
| A02B-0357-R901 | 31i-BP iHMI Basic Function |
| A02B-0358-R901 | 32i-BP iHMI Basic Function |

349

Integrated Operation & Programming Guidance Functions

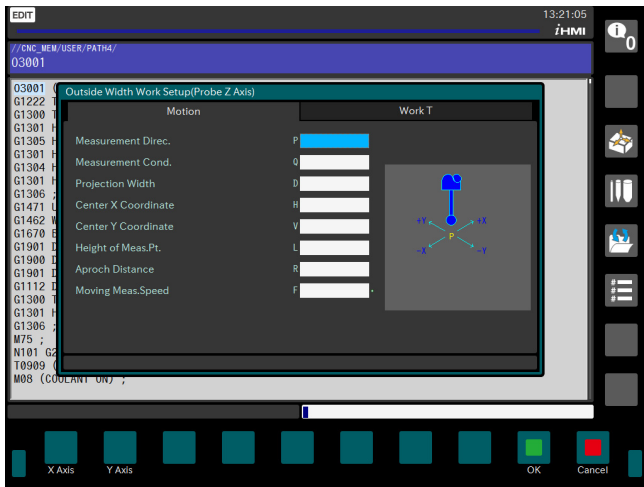

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

iHMI Set-Up Guidance

Features

iHMI Set-Up Guidance is a user interface for the execution of measurement cycles. It is an extension for the FANUC iHMI operation interface. More than 100 cycles for tool measurement, workpiece set-up, post-machining inspection and calibration are included in this function. Graphical guidance screens assist the user in selecting the proper cycle and inputting the cycle parameter data.

PANEL iH or PANEL iH Pro is necessary to use the function.

This function is a basic function in FANUC Series 0i-F Plus (Type 0).

Benefits


- Execute complex measurement operations easily by simply selecting and parametrizing measurement cycles
- Increase the accuracy of machined parts
- Reduce the time from drawing to cutting

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-R910 | 30i-B iHMI Set-up Guidance |
| A02B-0326-R910 | 31i-B5 iHMI Set-up Guidance |
| A02B-0327-R910 | 31i-B iHMI Set-up Guidance |
| A02B-0328-R910 | 32i-B iHMI Set-up Guidance |
| A02B-0333-R910 | 35i-B iHMI Set-up Guidance |
| A02B-0353-R910 | 30i-BP iHMI Set-Up Guidance |
| A02B-0356-R910 | 31i-B5P iHMI Set-Up Guidance |
| A02B-0357-R910 | 31i-BP iHMI Set-Up Guidance |
| A02B-0358-R910 | 32i-BP iHMI Set-Up Guidance |

350

Integrated Operation & Programming Guidance Functions

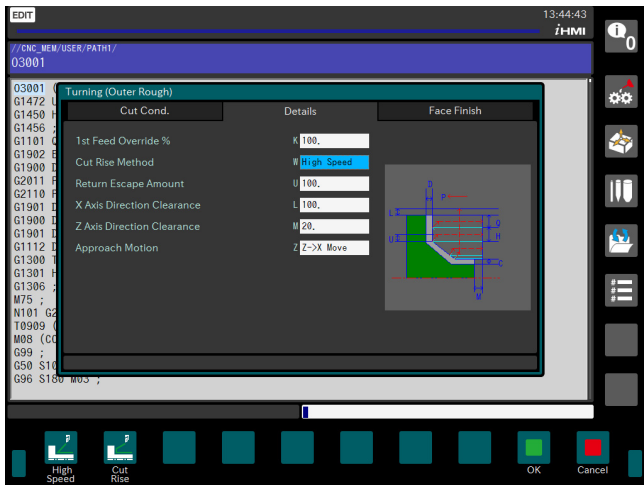

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

iHMI Machining Cycle

Features

iHMI Machining Cycle is a user interface for the execution of machining cycles. It is an extension for the FANUC iHMI operation interface. More than 200 cycles for milling and turning are included in this function. Graphical guidance screens assist the user in selecting the proper cycle and inputting the cycle parameter data. Part shapes can be input graphically and can be saved for re-use. Up to 4 paths are supported by the function.

PANEL iH or PANEL iH Pro is necessary to use the function.

This function is a basic function in FANUC Series 0i-F Plus (Type 0).

Benefits

- Execute complex machining operations easily by simply selecting and parametrizing machining cycles
- Reduce the time from drawing to cutting

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-R911 | 30i-B iHMI Machining Cycle for 1-Path System |
| A02B-0323-R912 | 30i-B iHMI Machining Cycle for 2-Path System |
| A02B-0323-R913 | 30i-B iHMI Machining Cycle for 3-Path System |
| A02B-0323-R914 | 30i-B iHMI Machining Cycle for 4-Path System |
| A02B-0326-R911 | 31i-B5 iHMI Machining Cycle for 1-Path System |
| A02B-0326-R912 | 31i-B5 iHMI Machining Cycle for 2-Path System |
| A02B-0326-R913 | 31i-B5 iHMI Machining Cycle for 3-Path System |
| A02B-0326-R914 | 31i-B5 iHMI Machining Cycle for 4-Path System |
| A02B-0327-R911 | 31i-B iHMI Machining Cycle for 1-Path System |
| A02B-0327-R912 | 31i-B iHMI Machining Cycle for 2-Path System |
| A02B-0327-R913 | 31i-B iHMI Machining Cycle for 3-Path System |
| A02B-0327-R914 | 31i-B iHMI Machining Cycle for 4-Path System |
| A02B-0328-R911 | 32i-B iHMI Machining Cycle for 1-Path System |
| A02B-0328-R912 | 32i-B iHMI Machining Cycle for 2-Path System |
| A02B-0333-R911 | 35i-B iHMI Machining Cycle for 1-Path System |
| A02B-0333-R912 | 35i-B iHMI Machining Cycle for 2-Path System |
| A02B-0353-R911 | 30i-BP iHMI Machining Cycle for 1-Path System |
| A02B-0353-R912 | 30i-BP iHMI Machining Cycle for 2-Path System |
| A02B-0353-R913 | 30i-BP iHMI Machining Cycle for 3-Path System |

351

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0353-R914 | 30i-BP iHMI Machining Cycle for 4-Path System |
| A02B-0356-R911 | 31i-B5P iHMI Machining Cycle for 1-Path System |
| A02B-0356-R912 | 31i-B5P iHMI Machining Cycle for 2-Path System |
| A02B-0356-R913 | 31i-B5P iHMI Machining Cycle for 3-Path System |
| A02B-0356-R914 | 31i-B5P iHMI Machining Cycle for 4-Path System |
| A02B-0357-R911 | 31i-BP iHMI Machining Cycle for 1-Path System |
| A02B-0357-R912 | 31i-BP iHMI Machining Cycle for 2-Path System |
| A02B-0357-R913 | 31i-BP iHMI Machining Cycle for 3-Path System |
| A02B-0357-R914 | 31i-BP iHMI Machining Cycle for 4-Path System |
| A02B-0358-R911 | 32i-BP iHMI Machining Cycle for 1-Path System |
| A02B-0358-R912 | 32i-BP iHMI Machining Cycle for 2-Path System |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

352

Integrated Operation & Programming Guidance Functions

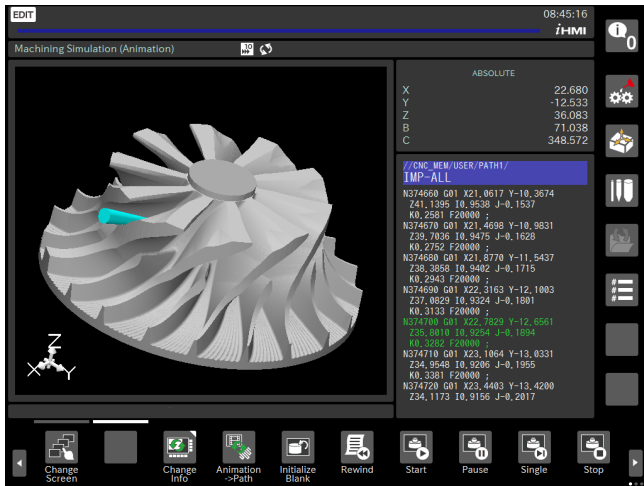

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

iHMI Machining Simulation Extension

Features

With the iHMI Machining Simulation Extension, you can evaluate the machining result for milling and turning before the actual operation. You are able to find errors and potential for optimizations in your program directly in front of the CNC. The simulation lets you spot critical tool movements or detect any interference between blank and tool during rapid traverse or if the spindle is not rotating. Avoid damage to your workpiece, tool and machine, and minimize scrap. Analyze the block distribution on the tool path to assess the quality before machining and ensure high quality production.

iHMI Machining Simulation Extension's multiple display options offer you a precise view on the part or the tool path. You can display the workpiece animation only, tool path and workpiece animation, and tool path only. If the tool covers the workpiece, you can hide the tool for better visibility.

You can use colors for the toolpaths in order to provide you with more information on the the machining:

- Assign different colors to the tool path everytime the tool changes. That way, you can distinguish easily between different process steps.
- Assign a color gradient to the tool path that shows the amount of material being removed per second. That way, you can find easily that parts of the program that need optimization.
- Assign different colors for air cut and cutting to the tool path. That way, you can identify unnecessary long air cuts and reduce them.

iHMI Machining Simulation Extension can simulate both programs that were created manually on the CNC as well as programs that were created by a CAD/CAM system. Using iHMI Machining Simulation Extension pays off even for 5-axis machining of complex workpieces that have been created and checked by a CAD/CAM system, because it considers the actual machine's kinematics.

Benefits

- Avoid damage to your workpiece, tool and machine
- ensure high quality production
- Find potential to optimize the part program
- Simulate 5-axis machining

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-R904 | 30i-B iHMI 5-Axis Machining Simulation |
| A02B-0323-R909 | 30i-B iHMI Machining Simulation |
| A02B-0326-R904 | 31i-B5 iHMI 5-Axis Machining Simulation |
| A02B-0326-R909 | 31i-B5 iHMI Machining Simulation |

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0327-R904 | 31i-B iHMI 5-Axis Machining Simulation |
| A02B-0327-R909 | 31i-B iHMI Machining Simulation |
| A02B-0328-R904 | 32i-B iHMI 5-Axis Machining Simulation |
| A02B-0328-R909 | 32i-B iHMI Machining Simulation |
| A02B-0349-R909 | 0i-TFP iHMI Machining Simulation |
| A02B-0350-R909 | 0i-MFP iHMI Machining Simulation |
| A02B-0353-R904 | 30i-BP iHMI 5-Axis Machining Simulation |
| A02B-0353-R909 | 30i-B Plus iHMI Machining Simulation |
| A02B-0356-R904 | 31i-B5P iHMI 5-Axis Machining Simulation |
| A02B-0356-R909 | 31i-B5 Plus iHMI Machining Simulation |
| A02B-0357-R904 | 31i-BP iHMI 5-Axis Machining Simulation |
| A02B-0357-R909 | 31i-B Plus iHMI Machining Simulation |
| A02B-0358-R904 | 32i-BP iHMI 5-Axis Machining Simulation |
| A02B-0358-R909 | 32i-B Plus iHMI Machining Simulation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

354

Integrated Operation & Programming Guidance Functions

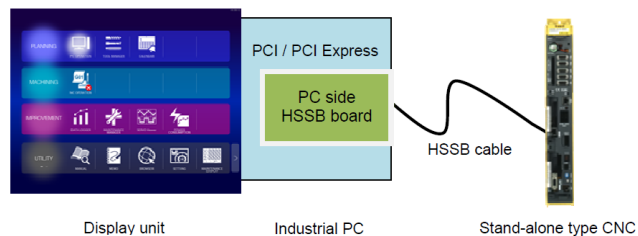

iHMI Driver for IPC

Features

iHMI can be installed on 3rd party Industrial PCs. You can use iHMI on displays with arbitrary display sizes and integrate iHMI into customer specific operator consoles. The iHMI Driver for IPC option is necessary in that case.

Benefits

- Use displays with arbitrary display sizes
- Integrate iHMI into customer specific operator consoles

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-R907 | 30i-B iHMI Driver for IPC |
| A02B-0326-R907 | 31i-B iHMI Driver for IPC |
| A02B-0327-R907 | 31i-B5 iHMI Driver for IPC |
| A02B-0328-R907 | 32i-B iHMI Driver for IPC |
| A02B-0333-R907 | 35i-B iHMI Driver for IPC |
| A02B-0349-R907 | 0i-TFP iHMI Driver for IPC |
| A02B-0350-R907 | 0i-MFP iHMI Driver for IPC |
| A02B-0353-R907 | 30i-BP iHMI Driver for IPC |
| A02B-0356-R907 | 31i-B5P iHMI Driver for IPC |
| A02B-0357-R907 | 31i-BP iHMI Driver for IPC |
| A02B-0358-R907 | 32i-BP iHMI Driver for IPC |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

355

Integrated Operation & Programming Guidance Functions

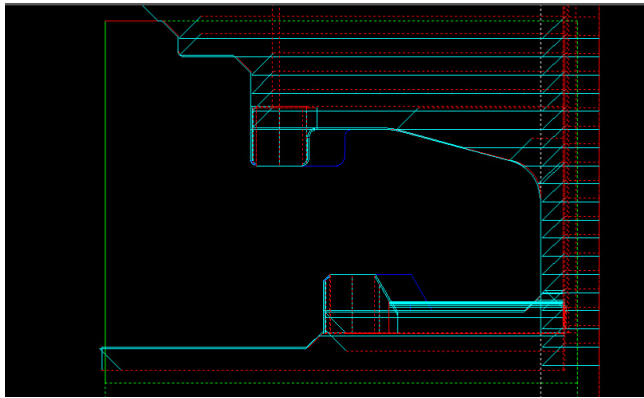

iCAP T (former "iHMI Interactive Programming for Complex Lathe")

Features

iCAP T is a conversational programming tool for lathes. It is an extension for the FANUC iHMI operation interface. iCAP T allows you to create NC programs by just inputting blanks and part shapes and by selecting machining processes.

Generally, creating part programs requires programming knowledge of G and M codes. With this function, part programs can be created automatically without any programming knowledge.

The basic function can create part programs for X-Z axes (turning) and C-Y axes (milling). Two-spindle machining is also supported. CAD data can be read in by the function.

The 2-Path function extension allows to create part programs for controlling a second path. Milling machining with Tilted Working Plane by B axis is supported by the B-Axis function extension. Both extensions require the basic function.

PANEL iH Pro is necessary to use the function. Only 15" or 19" displays with touch panel are supported.

Benefits

- Create part programs for complex lathes easily without any programming knowledge
- Reduce the time from drawing to cutting

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-R940 | 30i-B Basic Function for iCAP T |
| A02B-0323-R941 | 30i-B B-Axis Function for iCAP T |
| A02B-0323-R942 | 30i-B 2-Path Function for iCAP T |
| A02B-0323-R943 | 30i-B Tool Nose Radius Compensation Function for iCAP T |
| A02B-0326-R940 | 31i-B5 Basic Function for iCAP T |
| A02B-0326-R941 | 31i-B5 B-Axis Function for iCAP T |
| A02B-0326-R942 | 31i-B5 2-Path Function for iCAP T |
| A02B-0326-R943 | 31i-B5 Tool Nose Radius Compensation Function for iCAP T |
| A02B-0327-R940 | 31i-B Basic Function for iCAP T |
| A02B-0327-R941 | 31i-B B-Axis Function for iCAP T |
| A02B-0327-R942 | 31i-B 2-Path Function for iCAP T |
| A02B-0327-R943 | 31i-B Tool Nose Radius Compensation Function for iCAP T |
| A02B-0328-R940 | 32i-B Basic Function for iCAP T |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|-----------------------------------------------------------|
| A02B-0328-R941 | 32i-B B-Axis Function for iCAP T |
| A02B-0328-R942 | 32i-B 2-Path Function for iCAP T |
| A02B-0328-R943 | 32i-B Tool Nose Radius Compensation Function for iCAP T |
| A02B-0349-R940 | 0i-TFP Basic Function for iCAP T |
| A02B-0349-R941 | 0i-TFP B-Axis Function for iCAP T |
| A02B-0349-R942 | 0i-TFP 2-Path Function for iCAP T |
| A02B-0349-R943 | 0i-TFP Tool Nose Radius Compensation Function for iCAP T |
| A02B-0353-R940 | 30i-BP Basic Function for iCAP T |
| A02B-0353-R941 | 30i-BP B-Axis Function for iCAP T |
| A02B-0353-R942 | 30i-BP 2-Path Function for iCAP T |
| A02B-0353-R943 | 30i-BP Tool Nose Radius Compensation Function for iCAP T |
| A02B-0356-R940 | 31i-B5P Basic Function for iCAP T |
| A02B-0356-R941 | 31i-B5P B-Axis Function for iCAP T |
| A02B-0356-R942 | 31i-B5P 2-Path Function for iCAP T |
| A02B-0356-R943 | 31i-B5P Tool Nose Radius Compensation Function for iCAP T |
| A02B-0357-R940 | 31i-BP Basic Function for iCAP T |
| A02B-0357-R941 | 31i-BP B-Axis Function for iCAP T |
| A02B-0357-R942 | 31i-BP 2-Path Function for iCAP T |
| A02B-0357-R943 | 31i-BP Tool Nose Radius Compensation Function for iCAP T |
| A02B-0358-R940 | 32i-BP Basic Function for iCAP T |
| A02B-0358-R941 | 32i-BP B-Axis Function for iCAP T |
| A02B-0358-R942 | 32i-BP 2-Path Function for iCAP T |
| A02B-0358-R943 | 32i-BP Tool Nose Radius Compensation Function for iCAP T |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

357

Integrated Operation & Programming Guidance Functions



Cycle Time Estimate for iHMI

Features

Cycle Time Estimate for iHMI is a function that can quickly estimate the execution cycle time of an NC program. It delivers estimations for cutting and rapid traverse times, time spent on the execution of auxiliary codes (e. g. M codes), as well as cutting and rapid traverse travel distances. Cycle Time Estimate for iHMI is an extension for the FANUC iHMI operation interface.

The accuracy of the estimation is higher than estimations made with 3rd party software. All estimations are calculated in consideration of the real machine's acceleration and deceleration. It is possible to estimate the machining time of complex programs, for example programs for 5-axis machining.

Panel iH Pro is necessary to use this function.

Benefits

- Decrease processing time by optimizing programs
- Improve the utilization of your machines by enhanced and reliable machine schedule planning

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-R902 | 30i-B iHMI Cycle Time Estimate Function |
| A02B-0326-R902 | 31i-B5 iHMI Cycle Time Estimate Function |
| A02B-0327-R902 | 31i-B iHMI Cycle Time Estimate Function |
| A02B-0328-R902 | 32i-B iHMI Cycle Time Estimate Function |
| A02B-0329-R902 | 30i-LB iHMI Cycle Time Estimate Function |
| A02B-0330-R902 | 31i-LB iHMI Cycle Time Estimate Function |
| A02B-0331-R902 | 30i-PB iHMI Cycle Time Estimate Function |
| A02B-0332-R902 | 31i-PB iHMI Cycle Time Estimate Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

358

Integrated Operation & Programming Guidance Functions

Cycle Time Estimate Library Function

Features

Cycle Time Estimate is a function that can quickly estimate the execution cycle time of an NC program. It delivers estimations for cutting and rapid traverse times, time spent on the execution of auxiliary codes (e. g. M codes), as well as cutting and rapid traverse travel distances.

The accuracy of the estimation is higher than estimations made with 3rd party software. All estimations are calculated in consideration of the real machine's acceleration and deceleration. It is possible to estimate the machining time of complex programs, for example programs for 5-axis machining.

It is possible to create custom applications that incorporate the Cycle Time Estimate function, by using the Library contained in the "Disk for Cycle Time Estimate function". This option has to be effective in the CNC in order to use that library.

Benefits

- Decrease processing time by optimizing programs
- Improve the utilization of machines by enhanced and reliable machine schedule planning

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R900 | 30i-B Cycle Time Estimate Library Function |
| A02B-0326-R900 | 31i-B5 Cycle Time Estimate Library Function |
| A02B-0327-R900 | 31i-B Cycle Time Estimate Library Function |
| A02B-0328-R900 | 32i-B Cycle Time Estimate Library Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

359

Integrated Operation & Programming Guidance Functions

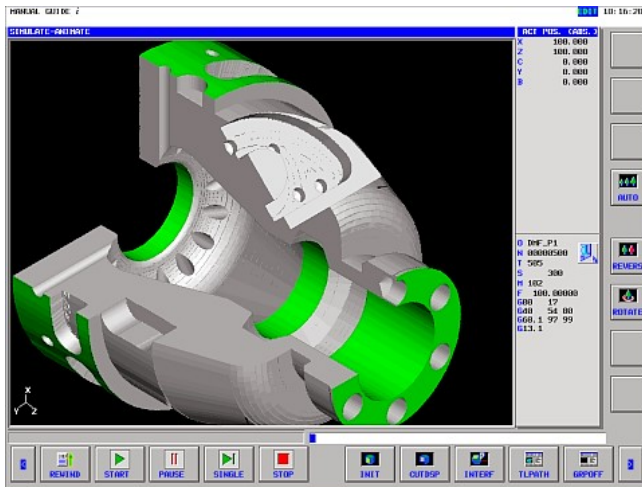

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MANUAL GUIDE i Basic Software

Features

MANUAL GUIDE i is a powerful software for shop floor programming; it provides machine operators with user friendly and powerful capabilities to operate a machine. The innovative programming system enables the development of programs from a drawing to a production part in a very short time.

MANUAL GUIDE i supports turning, milling and compound machining applications and can be used on simple machine as well as on very advanced machining processes.

The MANUAL GUIDE i software is built around the standard CNC ISO code format of the CNC and adds an ergonomic user interface to program the cycles. It uses a Graphical User Interface (GUI) with user-friendly icons which allows the user to interactively create part programs in just a few steps. All of the relevant information is displayed on a single CNC screen. Having to constantly change between screens is thus avoided as is the risk of getting lost in the numerous pop-up screens.

This function is a basic function in FANUC Series 0i-F Plus (Type 0).

Key features of MANUAL GUIDE i:

- Operator friendly programming environment
- Advanced cycle machining (Turning and Milling)
- Measurement cycles for workpieces and tools
- Detailed part program 3D simulation
- CNC ISO conversion of machining cycles
- Powerful editor and profile calculation
- Seamless environment switching
- Support for multi path Lathes and Milling machines
- Residual cutting
- Background machining simulation
- File management
- Customizable to add guidance windows for customer machining cycles

Several additional functions are available for MANUAL GUIDE i, such as Multi Path support, Tilted Working Plane support for 5-axis machining, etc. These functions are described further in the catalogue.

MANUAL GUIDE i can also be simulated on a Personal Computer with NCGuide or NCGuidePro. Refer to the software section of the catalogue for further information on this subject.

Benefits

- Assisted and conversational programming of machining cycles
- Simplification of the programming of parts

- Reduction of the total time required from drawing to cutting
- Simulation of the part program before cutting metal and machining
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------------------------------------|
| A02B-0323-R948 | 30i-B MANUAL GUIDE i (Step 2) |
| A02B-0323-R949 | 30i-B MANUAL GUIDE i (Step 1) - Upgrade to MG-i Enhanced, incl. All-in-One Screen, Advanced Editor, a. o. |
| A02B-0326-R948 | 31i-B5 MANUAL GUIDE i (Step 2) |
| A02B-0326-R949 | 31i-B5 MANUAL GUIDE i (Step 1) - Upgrade to MG-i Enhanced, incl. All-in-One Screen, Advanced Editor, a. o. |
| A02B-0327-R948 | 31i-B MANUAL GUIDE i (Step 2) |
| A02B-0327-R949 | 31i-B MANUAL GUIDE i (Step 1) - Upgrade to MG-i Enhanced, incl. All-in-One Screen, Advanced Editor, a. o. |
| A02B-0328-R948 | 32i-B MANUAL GUIDE i (Step 2) |
| A02B-0328-R949 | 32i-B MANUAL GUIDE i (Step 1) - Upgrade to MG-i Enhanced, incl. All-in-One Screen, Advanced Editor, a. o. |
| A02B-0339-R948 | 0i-TF MANUAL GUIDE i (Step 2) |
| A02B-0340-R948 | 0i-MF MANUAL GUIDE i (Step 2) |
| A02B-0349-R948 | 0i-TFP MANUAL GUIDE i |
| A02B-0350-R948 | 0i-MFP MANUAL GUIDE i |
| A02B-0353-R948 | 30i-BP MANUAL GUIDE i |
| A02B-0356-R948 | 31i-B5P MANUAL GUIDE i |
| A02B-0357-R948 | 31i-BP MANUAL GUIDE i |
| A02B-0358-R948 | 32i-BP MANUAL GUIDE i |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

361

Integrated Operation & Programming Guidance Functions

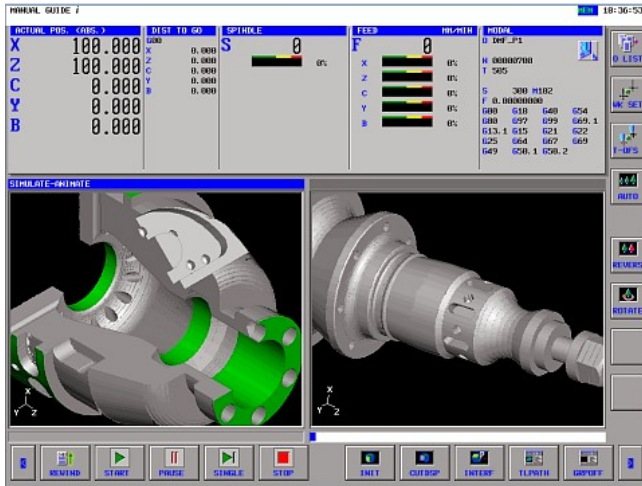

MANUAL GUIDE i Multi-Path Support

Features

The Multi-Path Support function extends the MANUAL GUIDE i functionalities to multi paths machines. It provides the capability to program machining cycles and execute them in several paths.

Supported machine configurations:

- Lathes machines: 2, 3 and 4 paths
- Milling machines: 2 paths

Benefits

- Increase of the capability of MANUAL GUIDE i to support multi-path configurations
- Increase of the productivity of multi path lathes and multi path milling machines

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-S786 | 30i-B MANUAL GUIDE i - Multi-Path Lathe |
| A02B-0326-S786 | 31i-B5 MANUAL GUIDE i - Multi-Path Lathe |
| A02B-0327-S786 | 31i-B MANUAL GUIDE i - Multi-Path Lathe |
| A02B-0328-S786 | 32i-B MANUAL GUIDE i - Multi-Path Lathe |
| A02B-0339-S786 | 0i-TF MANUAL GUIDE i - Multi-Path Function |
| A02B-0340-S786 | 0i-MF MANUAL GUIDE i - Multi-Path Function |
| A02B-0349-S786 | 0i-TFP MANUAL GUIDE i - Multi-Path Function |
| A02B-0350-S786 | 0i-MFP MANUAL GUIDE i - Multi-Path Function |
| A02B-0353-S786 | 30i-BP MANUAL GUIDE i - Multi-Path Function |
| A02B-0356-S786 | 31i-B5P MANUAL GUIDE i - Multi-Path Function |
| A02B-0357-S786 | 31i-BP MANUAL GUIDE i - Multi-Path Function |
| A02B-0358-S786 | 32i-BP MANUAL GUIDE i - Multi-Path Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

362

Integrated Operation & Programming Guidance Functions

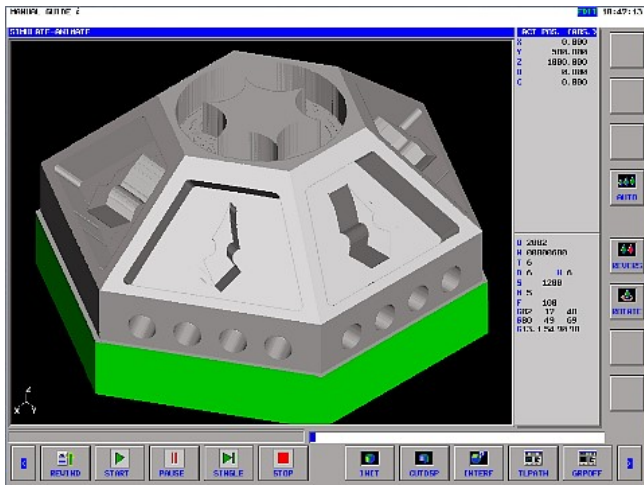

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MANUAL GUIDE i Tilted Working Plane (TWP) Machining Function

Features

The Tilted Working Plane (TWP) Machining function for MANUAL GUIDE i provides a set of guidance windows to program Tilted Working Plane machining comfortably.

The following Tilted Working Plane machining cycles are available in MANUAL GUIDE i:

- Euler's angle
- Roll-Pitch-Yaw angle
- 3 points specification
- 2 vectors specification
- Projection angle
- Tool axis direction
- Tilted Working Plane cancel

Limitation in machining simulation:

- The machining simulation is only provided for mechanical unit or mechanical configurations which are of "table rotation type", that the "A" is the rotary master axis and the "C" is the rotary slave axis. In all other rotary axis configurations machining simulation cannot be performed.
- In case of incremental Tilted Working Plane command or simulation of Tilted Working Plane with simultaneous rotation of two axes, the machining simulation cannot be performed.
- Machining simulation by single block soft key cannot be simulated.

Benefits

- Guidance windows to program Tilted Planes commands in different formats
- The operator can choose which cycle is best suited depending from how the tilted plane is specified in the part drawing

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------|
| A02B-0323-S788 | 30i-B MANUAL GUIDE i - Tilted Working Plane Machining Function |
| A02B-0326-S788 | 31i-B5 MANUAL GUIDE i - Tilted Working Plane Machining Function |
| A02B-0327-S788 | 31i-B MANUAL GUIDE i - Tilted Working Plane Machining Function |
| A02B-0328-S788 | 32i-B MANUAL GUIDE i - Tilted Working Plane Machining Function |

| Specification | Description |
|----------------|-----------------------------------------------------------------|
| A02B-0340-S788 | 0i-MF MANUAL GUIDE i - Tilted Working Plane Indexing |
| A02B-0350-S788 | 0i-MFP MANUAL GUIDE i - Tilted Working Plane Indexing |
| A02B-0353-S788 | 30i-BP MANUAL GUIDE i - Tilted Working Plane Indexing Function |
| A02B-0356-S788 | 31i-B5P MANUAL GUIDE i - Tilted Working Plane Indexing Function |
| A02B-0357-S788 | 31i-BP MANUAL GUIDE i - Tilted Working Plane Indexing Function |
| A02B-0358-S788 | 32i-BP MANUAL GUIDE i - Tilted Working Plane Indexing Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

364

Integrated Operation & Programming Guidance Functions

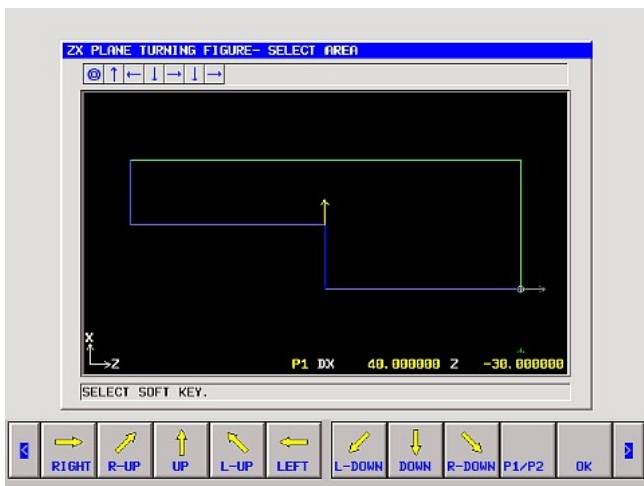

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MANUAL GUIDE i Windows Call Function

Features

The Windows Call function provides the capability to call and display MANUAL GUIDE i windows within a C Language Executor application :

- Blank figure selection window
- Blank figure data input window (fixed form and arbitrary free figure)
- Free figure input window (free figure creation window and range selection window)
- Machining simulation window
- NC program conversion window

Benefits


- Possibility to customize and enhance MANUAL GUIDE i with screens and features.

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-S779 | 30i-B MANUAL GUIDE i - Windows Call Function |
| A02B-0326-S779 | 31i-B5 MANUAL GUIDE i - Windows Call Function |
| A02B-0327-S779 | 31i-B MANUAL GUIDE i - Windows Call Function |
| A02B-0328-S779 | 32i-B MANUAL GUIDE i - Windows Call Function |
| A02B-0339-S779 | 0i-TF MANUAL GUIDE i - Window Call Function |
| A02B-0340-S779 | 0i-MF MANUAL GUIDE i - Window Call Function |
| A02B-0349-S779 | 0i-TFP MANUAL GUIDE i - Windows Call Function |
| A02B-0350-S779 | 0i-MFP MANUAL GUIDE i - Windows Call Function |
| A02B-0353-S779 | 30i-BP MANUAL GUIDE i - Windows Call Function |
| A02B-0356-S779 | 31i-B5P MANUAL GUIDE i - Windows Call Function |
| A02B-0357-S779 | 31i-BP MANUAL GUIDE i - Windows Call Function |
| A02B-0358-S779 | 32i-BP MANUAL GUIDE i - Windows Call Function |

365

Integrated Operation & Programming Guidance Functions

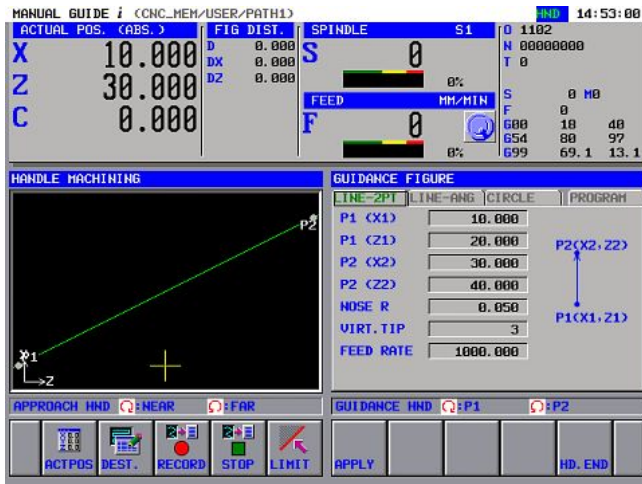

MANUAL GUIDE i Handle Machining Function

Features

The Handle Machining function provides the following two features to MANUAL GUIDE i:

- Machining by handle: this feature enables the operators to machine a slanted line or an arc with simultaneous two axes motion using a single handle.
- Programming by handle: the handle operation can be memorized as a program and the tool motion can be played back.

Benefits

- Simplification of the approach and programming process
- Decrease of the time required to setup the work
- Overall increase of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-S797 | 30i-B Handle Machining Function |
| A02B-0326-S797 | 31i-B5 Handle Machining Function |
| A02B-0327-S797 | 31i-B Handle Machining Function |
| A02B-0328-S797 | 32i-B Handle Machining Function |
| A02B-0339-S797 | 0i-TF Handle Machining Function |
| A02B-0340-S797 | 0i-MF Handle Machining Function |
| A02B-0349-S797 | 0i-TFP Handle Machining Function |
| A02B-0350-S797 | 0i-MFP Handle Machining Function |
| A02B-0353-S797 | 30i-BP Handle Machining Function |
| A02B-0356-S797 | 31i-B5P Handle Machining Function |
| A02B-0357-S797 | 31i-BP Handle Machining Function |
| A02B-0358-S797 | 32i-BP Handle Machining Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

366

Integrated Operation & Programming Guidance Functions

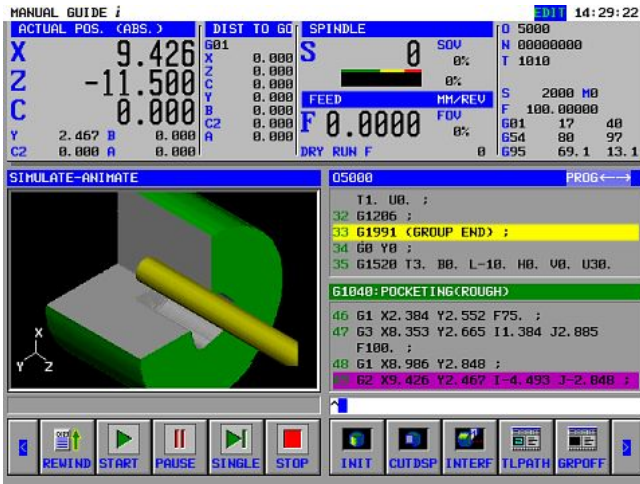

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MANUAL GUIDE i Advanced Guidance Function

Features

The MANUAL GUIDE i Advanced Guidance Option provides the following features:

- Decomposed cycle display: this function can display the part program blocks being generated by the MANUAL GUIDE i cycles during machining simulation on the machining simulation screen.
- Input data check by simulation: the operation of a cycle that is being edited can be checked by the machining simulation function (animation / tool pathdrawing) at the same time.
- Help window for each screen (PANEL i or LCD unit C required): a context sensitive help of the MANUAL GUIDE i cycle currently being edited is displayed by pushing the HELP key on the MDI keyboard.
- Integration of animation software that is running on PANEL i: MANUAL GUIDE i can be interfaced to 3rd party simulation software running on PC; these packages can be used when high performance simulations are required. The 3rd party animation software can access the storage memory of the CNC and can acquire the machining program (MANUAL GUIDE i does not output the machining program to 3rd party animation software directly).

Benefits

- Extension of the function set of MANUAL GUIDE i
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-S774 | 30i-B MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0326-S774 | 31i-B5 MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0327-S774 | 31i-B MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0328-S774 | 32i-B MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0339-S774 | 0i-TF MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0340-S774 | 0i-MF MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0349-S774 | 0i-TFP MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0350-S774 | 0i-MFP MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0353-S774 | 30i-BP MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0356-S774 | 31i-B5P MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0357-S774 | 31i-BP MANUAL GUIDE i - Advanced Guidance Function |
| A02B-0358-S774 | 32i-BP MANUAL GUIDE i - Advanced Guidance Function |

367

Integrated Operation & Programming Guidance Functions

| ACTUAL POS. (ABS.) | | DIST TO GO | |
|--------------------|---------|------------|-------|
| X | 300.000 | G00 | |
| Z | 73.740 | X | 0.000 |
| C ₁ | 30.000 | Z | 0.000 |
| Y | 0.000 | C1 | 0.000 |
| B | 0.000 | Y | 0.000 |
| C ₂ | 0.000 | B | 0.000 |
| | | C2 | 0.000 |
| NEXT DIST | | | |
| | | G00 | |
| | | X | 0.000 |
| | | Z | 0.000 |
| | | C1 | 0.000 |
| | | Y | 0.000 |
| | | B | 0.000 |
| | | C2 | 0.000 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MANUAL GUIDE i Extended Axis Name Function

Features

With the Extended Axis Name function, it is possible to add extended axis names to MANUAL GUIDE i machining cycles .

Extended axis name can be used with linear axis other than the basic three axis or rotary axis of workpiece rotation and are composed of 2 characters that are a letter and a number; for example B2, C2, etc.

Extended axis name can also be displayed on the following screens:

- Base screen
- Relative coordinates presetting screen
- Workpiece coordinate data screen
- Machining simulation screen

This function can be used on following screens / resolutions:

- 19" and 15" LCD screens on the Series 30i / 31i / 32i - MODEL A and MODEL B CNC
- 8.4" and 10.4" LCD screens on the Series 30i / 31i / 32i MODEL B CNC

This function is a basic function in FANUC Series 0i-F Plus (Type 0).

Benefits

- The advantage of the MANUAL GUIDE i machining cycles can also used on machines tools using extended axis names

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------------------------------------------|
| A02B-0323-S789 | 30i-B MANUAL GUIDE i - Extended Axis Name Function - 2 Characters for Axis Name on MANUAL GUIDE i Screen |
| A02B-0326-S789 | 31i-B5 MANUAL GUIDE i - Extended Axis Name Function - 2 Characters for Axis Name on MANUAL GUIDE i Screen |
| A02B-0327-S789 | 31i-B MANUAL GUIDE i - Extended Axis Name Function - 2 Characters for Axis Name on MANUAL GUIDE i Screen |
| A02B-0328-S789 | 32i-B MANUAL GUIDE i - Extended Axis Name Function - 2 Characters for Axis Name on MANUAL GUIDE i Screen |
| A02B-0339-S789 | 0i-TF MANUAL GUIDE i - Extended Axis Name Function |
| A02B-0340-S789 | 0i-MF MANUAL GUIDE i - Extended Axis Name Function |
| A02B-0349-S789 | 0i-TFP MANUAL GUIDE i - Extended Axis Name Function |

368

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0350-S789 | 0i-MFP MANUAL GUIDE i - Extended Axis Name Function |
| A02B-0353-S789 | 30i-BP MANUAL GUIDE i - Extended Axis Name Function |
| A02B-0356-S789 | 31i-B5P MANUAL GUIDE i - Extended Axis Name Function |
| A02B-0357-S789 | 31i-BP MANUAL GUIDE i - Extended Axis Name Function |
| A02B-0358-S789 | 32i-BP MANUAL GUIDE i - Extended Axis Name Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

369

Integrated Operation & Programming Guidance Functions

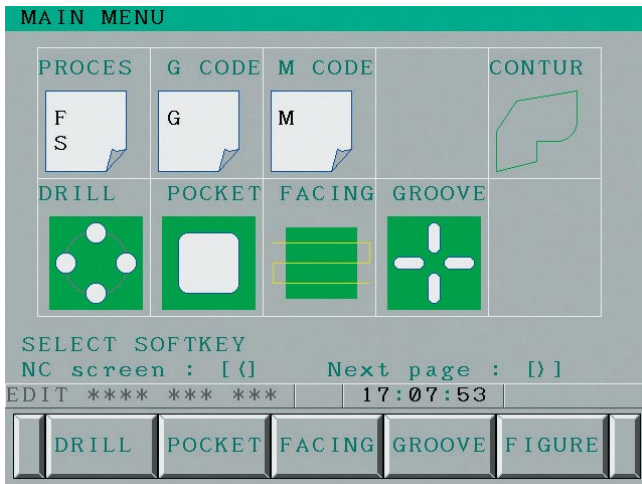

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MANUAL GUIDE 0i

Features

MANUAL GUIDE 0i is a simplified operation guidance software to assist an operator in creating complex part program, and actual machining.

MANUAL GUIDE 0i provides the following features:

- ISO code part programming: ISO can be used to directly input a simple operation such as linear or arc machining with G codes or easily input complicated operations such as pocketing or turning within an existing machining cycle
- Easy specification of a tool, spindle, coolant and feedrate: these conditions can easily be specified on a screen before machining
- Easy programming of G codes and M codes: G codes and M codes can easily be input with reference to the screen for G code description and illustration and the screen for M code description and illustration.
- Preparation of machining cycles for machining centers:
 - Hole machining (pattern figure)
 - Pocketing (pattern figure)
 - Facing (pattern figure)
 - Grooving (pattern figure)
- Preparation of machining cycles for lathe systems:
 - Drilling (workpiece center)
 - Turning (arbitrary figure)
 - Grooving (normal groove, trapezoidal groove)
 - Threading (general-purpose thread, metric thread, unified thread, PT/PF thread)
- Easy input of contour figure: a contour figure consisting of lines and arcs can be easily input and converted into a NC command block (G01/G02/G03). In addition, advance figure calculation functions can be performed with the help of 11 auxiliary functions.

Available language packages for MANUAL GUIDE 0i:

- English, Chinese, Japanese
- English, German, French
- English, Italian, Spanish
- English, Swedish, Portuguese
- English, Czech, Polish

Benefits

- Assisted and conversational programming of machining cycles
- Simplification of the programming of parts
- Reduction of the total time required from parts drawing to parts cutting
- Improvement of the overall machining productivity

370

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0339-S772 | 0i-TF MANUAL GUIDE 0i |
| A02B-0340-S772 | 0i-MF MANUAL GUIDE 0i |
| A02B-0349-S772 | 0i-TFP MANUAL GUIDE 0i |
| A02B-0350-S772 | 0i-MFP MANUAL GUIDE 0i |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

371

Integrated Operation & Programming Guidance Functions

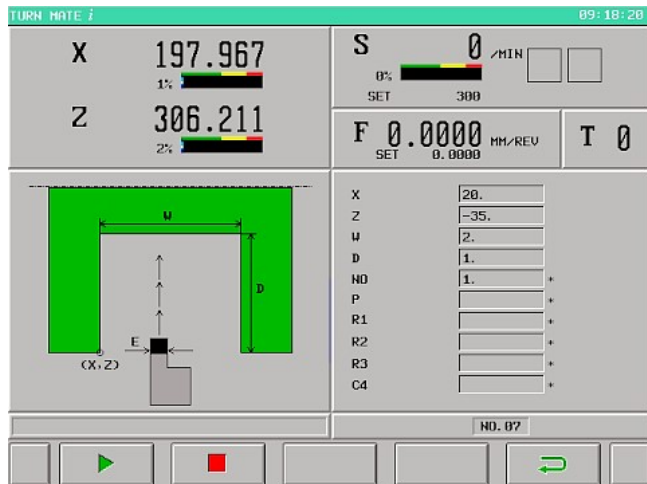

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

TURN MATE i Basic Software

Features

TURN MATE i is a conversational software function which can assist the operation of entry-level turning machines. The productivity and the flexibility of turning machines can be greatly increased through the operator assistance functions provided by TURN MATE i, which can substitute to the know-how in CNC machining.

No knowledge of G code ISO language is required to program workpieces with TURN MATE i.

TURN MATE i is easy to operate with clearly laid out screens; it is available for monochrome or color displays, for touch screens or traditional keyboard / MDI operation.

Various semi-automatic cycles and linked cycles are provided and with the NC conversion function it is possible to convert machining cycles in standard NC ISO language (Optional Function).

Overview of the product features:

- Manual operation with programmable traversing limits
- Tool geometry compensation for up to 16 tools
- Constant surface speed
- Program execution in accordance with DIN/ ISO
- Imperial (inches) or metric display
- Choice of language
- Calculator function
- Cutting cycles
 - Outer roughing
 - Inner roughing (including dressing)
 - Rear face machining
 - Taper turning
 - Thread cutting
 - Tapping
 - Cutting of tapered threads
 - Thread repair
 - Recess Cutting
 - Ball turning
 - Grooving
 - Contour turning based on individual points (free figures)
 - Non-monotonous free figures
- Linked cutting cycles
- Memory Card interface
- NC ISO conversion

372

Benefits

- Assisted and conversational programming of machining cycles
- Simplification of the programming of parts
- Reduction of the total time required from parts drawing to parts cutting
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0339-S792 | 0i-TF TURN MATE i - with Touch Panel |
| A02B-0339-S793 | 0i-TF TURN MATE i - without Touch Panel |
| A02B-0349-S792 | 0i-TF Plus Turn Mate i with Touch Panel |
| A02B-0349-S793 | 0i-TF Plus Turn Mate i without Touch Panel |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

373

Integrated Operation & Programming Guidance Functions

TURN MATE i Expanded Function

Features

TURN MATE i Expanded Function increases the numbers of cycles and programs that can be registered in TURN MATE i.

| Item | Standard | Expanded |
|---------------------------------------------------------|----------|----------|
| Number of cycles that can be registered: | 40 | 120 |
| Number of programs that can be registered: | 5 | 120 |
| Number of cycles that can be registered in one program: | 20 | 50 |

Benefits

- Program parts with complicated shapes in TURN MATE i

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0339-R947 | 0i-TF TURN MATE i - Expanded Function |
| A02B-0349-R947 | 0i-TFP TURN MATE i - Expanded Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

374

Integrated Operation & Programming Guidance Functions

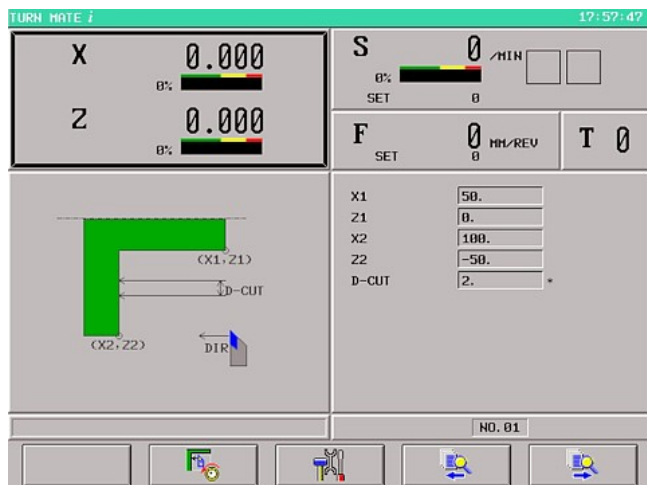

TURN MATE i MDI Key Operation Function

Features

TURN MATE i has been originally designed to work on CNC equipped with touch panel displays. With this function, it is also possible to operate TURN MATE i on non-touch panel displays equipped with a MDI keyboard.

A cursor on the screen will indicate the object being focused on. The cursor can be moved on the screen using the cursor keys of the MDI keyboard.

Benefits

- Possibility to use TURN MATE i on machine not equipped with touch panel displays

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0339-S794 | 0i-TF TURN MATE i - MDI Key Operation Function |
| A02B-0349-S794 | 0i-TF Plus Turn Mate i MDI Key Operation Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

375

Integrated Operation & Programming Guidance Functions

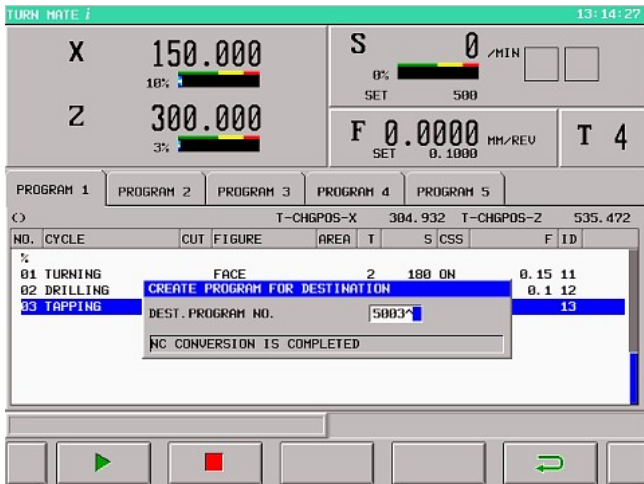

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

TURN MATE i NC Program Conversion Function

Features

TURN MATE i machining cycles can be converted into standard ISO G code blocks with the NC Program Conversion function.

The part program generated by this function can be used on other machines which do not feature TURN MATE i. In addition, the operator can perform a detailed analysis of the movements generated by the machining cycles.

Benefits


- The same workpiece machined with TURN MATE i can also be machined on CNC machines where TURN MATE i is not available.

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0339-S795 | 0i-TF TURN MATE i - NC Program Conversion Function |
| A02B-0349-S795 | 0i-TF Plus Turn Mate i NC Program Conversion Function |

376

Integrated Operation & Programming Guidance Functions

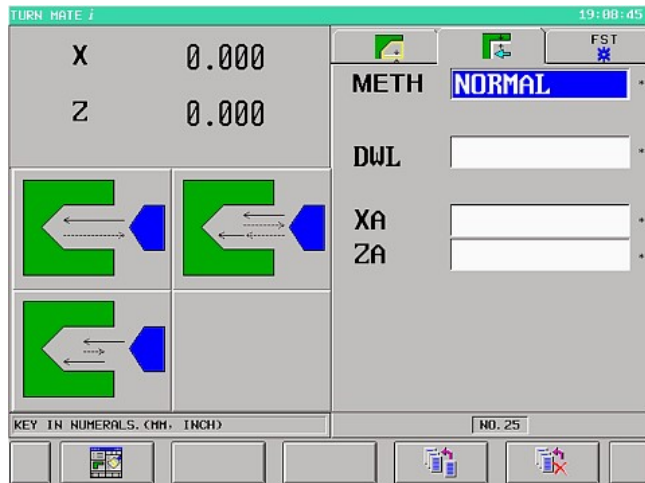

TURN MATE i Expansion of Machining Cycles

Features

The TURN MATE i Expansion of Machining Cycle function features the following key items:

- Detailed information such as cutting method, etc. is displayed on the base screen
- The 3 types of drilling cycles (Normal / Peck / High-speed Peck) can be selected on the input data screen
- Possibility to input the negative X values in facing cycles

Benefits

- Extension of the function set of TURN MATE i
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0339-S796 | 0i-TF TURN MATE i - Expansion of Machining Cycle |
| A02B-0349-S796 | 0i-TF Plus Turn Mate i Expansion of Machining Cycle |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

377

Functions

Auxiliary / Spindle Speed Functions

This section of the catalogue contains the functions related to auxiliary and spindle functions in the CNC.

Some of the functions detailed in the catalogue:

- Analogue spindle control
- Spindle orientation
- Spindle synchronous control
- Multi-spindlecontrol
- Spindle CS contour control
- High precision learning control
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

378

Auxiliary / Spindle Speed Functions

2nd Auxiliary Function

Features

The 2nd Auxiliary Function provides a second part programming code called "code B" to activate Auxiliary functions.

Up to eight digits, selectable by a parameter setting and a strobe signal are sent to the PMC. Only one B code is allowed per block.

This function is a basic function in FANUC Series 0i-F (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- Allows programming of B code to do M code functions
- Sometime B codes provide ease of use for operation and programming
- Typical application Turn on coolant command
Pallet 1=M08, Pallet 2=B08
- No change in cycle time

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-J920 | 30i-B 2nd Auxiliary Function |
| A02B-0326-J920 | 31i-B5 2nd Auxiliary Function |
| A02B-0327-J920 | 31i-B 2nd Auxiliary Function |
| A02B-0328-J920 | 32i-B 2nd Auxiliary Function |
| A02B-0333-J920 | 35i-B 2nd Auxiliary Function |
| A02B-0349-J920 | 0i-TFP 2nd Auxiliary Function |
| A02B-0350-J920 | 0i-MFP 2nd Auxiliary Function |
| A02B-0353-J920 | 30i-BP 2nd Auxiliary Function |
| A02B-0356-J920 | 31i-B5P 2nd Auxiliary Function |
| A02B-0357-J920 | 31i-BP 2nd Auxiliary Function |
| A02B-0358-J920 | 32i-BP 2nd Auxiliary Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

379

Auxiliary / Spindle Speed Functions

Auxiliary Function Output in Moving Axis

Features

The Auxiliary Function Output in Moving Axis provides a way when specifying absolute coordinate values and auxiliary function (M, B) at the G50.9 block, that auxiliary functions are output to PMC when the absolute coordinate enters the specified area in movement block. G50.9 can be specified in 2 blocks continuously.

In other words, the auxiliary function output point in the movement block can be specified in two. Code signals and strobe signals are output to the same signal address as usual auxiliary function.

Benefits

- Simplification of the programming

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-S889 | 30i-B Auxiliary Function Output in Moving Axis |
| A02B-0326-S889 | 31i-B5 Auxiliary Function Output in Moving Axis |
| A02B-0327-S889 | 31i-B Auxiliary Function Output in Moving Axis |
| A02B-0328-S889 | 32i-B Auxiliary Function Output in Moving Axis |
| A02B-0339-S889 | 0i-TF Auxiliary Function Output in Moving Axis |
| A02B-0340-S889 | 0i-MF Auxiliary Function Output in Moving Axis |
| A02B-0349-S889 | 0i-TFP Auxiliary Function Output in Moving Axis |
| A02B-0350-S889 | 0i-MFP Auxiliary Function Output in Moving Axis |
| A02B-0353-S889 | 30i-BP Auxiliary Function Output in Moving Axis |
| A02B-0356-S889 | 31i-B5P Auxiliary Function Output in Moving Axis |
| A02B-0357-S889 | 31i-BP Auxiliary Function Output in Moving Axis |
| A02B-0358-S889 | 32i-BP Auxiliary Function Output in Moving Axis |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

380

Auxiliary / Spindle Speed Functions

Waiting Function by Specifying Start Point

Features

Control based on M codes is normally used to make one path to wait on the other during machining. When a M code for waiting is specified in a block of a path during automatic operation, the other path waits for the same M code to be specified before starting the execution of the next block.

With the Waiting Function by Specifying Start Point function, by specifying a start point with a waiting M code, the absolute coordinate value of that path or the other path can be used as the condition for waiting.

Benefits

- Simplification of the programming

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-S888 | 30i-B Waiting Function by Specifying Start Point |
| A02B-0326-S888 | 31i-B5 Waiting Function by Specifying Start Point |
| A02B-0327-S888 | 31i-B Waiting Function by Specifying Start Point |
| A02B-0328-S888 | 32i-B Waiting Function by Specifying Start Point |
| A02B-0339-S888 | 0i-TF Waiting Function by Specifying Start Point |
| A02B-0340-S888 | 0i-MF Waiting Function by Specifying Start Point |
| A02B-0349-S888 | 0i-TFP Waiting Function by Specifying Start Point |
| A02B-0350-S888 | 0i-MFP Waiting Function by Specifying Start Point |
| A02B-0353-S888 | 30i-BP Waiting Function by Specifying Point |
| A02B-0356-S888 | 31i-B5P Waiting Function by Specifying Point |
| A02B-0357-S888 | 31i-BP Waiting Function by Specifying Point |
| A02B-0358-S888 | 32i-BP Waiting Function by Specifying Point |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

381

Auxiliary / Spindle Speed Functions

Spindle Serial Output

Features

A speed command is output to the spindle motor according to the specified spindle speed.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Permits Contouring C axis capability
- Single point threads capability
- Allows for spindle orientation
- Better interface as compared to Analog
- Can have 2 serial spindles per path

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J850 | 30i-B Spindle Serial Output |
| A02B-0326-J850 | 31i-B5 Spindle Serial Output |
| A02B-0327-J850 | 31i-B Spindle Serial Output |
| A02B-0328-J850 | 32i-B Spindle Serial Output |
| A02B-0333-J850 | 35i-B Spindle Serial Output |
| A02B-0334-J850 | PM i-A Spindle Serial Output |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

382

Auxiliary / Spindle Speed Functions

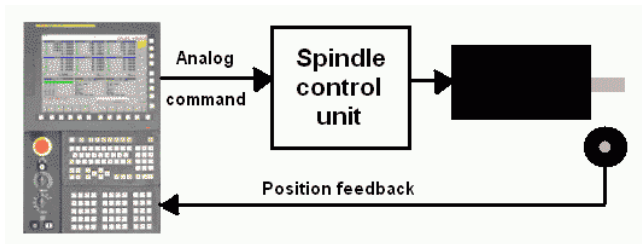

Spindle Analog Output

Features

Allows speed proportional to analog output voltage command on S code.

This function is a basic function in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Allows speed proportional to analog output voltage command on S code
- Constant surface speed control possible
- Third party spindles can be interfaced

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J860 | 30i-B Spindle Analog Output Function |
| A02B-0326-J860 | 31i-B5 Spindle Analog Output Function |
| A02B-0327-J860 | 31i-B Spindle Analog Output Function |
| A02B-0328-J860 | 32i-B Spindle Analog Output Function |
| A02B-0333-J860 | 35i-B Spindle Analog Output Function |
| A02B-0353-J860 | 30i-BP Spindle Analog Output Function |
| A02B-0356-J860 | 31i-B5P Spindle Analog Output Function |
| A02B-0357-J860 | 31i-BP Spindle Analog Output Function |
| A02B-0358-J860 | 32i-BP Spindle Analog Output Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

383

Auxiliary / Spindle Speed Functions

Constant Surface Speed Control

Features

When a surface speed (in m/min or feet/min) is specified with an S code (a numeric value following S), the spindle speed is controlled so that the surface speed is kept constant with respect to the change in tool position.

This function is a basic function in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Spindle speed adjusted automatically to maintain constant amount of material
- Typical example are surface grinders: as diameter increases speed reduces thereby improving surface finish, reducing tool wear while maintaining constant material removal rate

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J855 | 30i-B Constant Surface Speed Control |
| A02B-0326-J855 | 31i-B5 Constant Surface Speed Control |
| A02B-0327-J855 | 31i-B Constant Surface Speed Control |
| A02B-0328-J855 | 32i-B Constant Surface Speed Control |
| A02B-0333-J855 | 35i-B Constant Surface Speed Control |
| A02B-0353-J855 | 30i-BP Constant Surface Speed Control |
| A02B-0356-J855 | 31i-B5P Constant Surface Speed Control |
| A02B-0357-J855 | 31i-BP Constant Surface Speed Control |
| A02B-0358-J855 | 32i-BP Constant Surface Speed Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

384

Auxiliary / Spindle Speed Functions

Actual Spindle Speed Output

Features

The actual spindle speed calculated from the spindle motor position coder feedback signal is output in 16-bit binary code.

This function is a basic function in FANUC Series 0i-TF (Type 1, Type 3) and 0i-TF Plus (Type 0, 1 and 3).

Benefits

- Simplification of the programming

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-J856 | 30i-B Actual Spindle Speed Output |
| A02B-0326-J856 | 31i-B5 Actual Spindle Speed Output |
| A02B-0327-J856 | 31i-B Actual Spindle Speed Output |
| A02B-0328-J856 | 32i-B Actual Spindle Speed Output |
| A02B-0333-J856 | 35i-B Actual Spindle Speed Output |
| A02B-0349-J856 | 0i-TFP Actual Spindle Speed Output |
| A02B-0353-J856 | 30i-BP Actual Spindle Speed Output |
| A02B-0356-J856 | 31i-B5P Actual Spindle Speed Output |
| A02B-0357-J856 | 31i-BP Actual Spindle Speed Output |
| A02B-0358-J856 | 32i-BP Actual Spindle Speed Output |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

385

Auxiliary / Spindle Speed Functions

Spindle Orientation

Features

Spindle orientation can be performed by simply mounting a position coder on the spindle thereby stopping the spindle at fixed point.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- No need to mount stoppers or pins to physically stop the spindle at same location every time
- Minimizes mechanical parts and improves accuracy and machine life
- Accuracy of orientation even at high speeds reduces cycle time
- Permits precise tool changes
- Orientation can be done either from machine operator panel or by simple M command

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-J853 | 30i-B Spindle Orientation for One Spindle |
| A02B-0326-J853 | 31i-B5 Spindle Orientation for One Spindle |
| A02B-0327-J853 | 31i-B Spindle Orientation for One Spindle |
| A02B-0328-J853 | 32i-B Spindle Orientation for One Spindle |
| A02B-0333-J853 | 35i-B Spindle Orientation for One Spindle |
| A02B-0334-J853 | PM i-A Spindle Orientation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

386

Auxiliary / Spindle Speed Functions

Spindle Orientation Expansion (Extended Spindle Orientation)

Features

This function extends the spindle orientation function so that up to 8 spindle motors can be positioned simultaneously.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus (max. 4 spindles).

Benefits

- Simplification of the programming

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0323-J861 | 30i-B Extended Spindle Orientation, Max. 8 Spindles |
| A02B-0326-J861 | 31i-B5 Extended Spindle Orientation, Max. 6 Spindles |
| A02B-0327-J861 | 31i-B Extended Spindle Orientation, Max. 6 Spindles |
| A02B-0328-J861 | 32i-B Extended Spindle Orientation, Max. 6 Spindles |
| A02B-0333-J861 | 35i-B Extended Spindle Orientation, Max. 4 Spindles |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

387

Auxiliary / Spindle Speed Functions

Spindle Output Switching Function

Features

The Spindle Output Switching functions allows to switch seamlessly between the two windings of the spindle motor. One winding is used for low speed and the other winding for high speed. This provides a stable output for the spindle motor over a large speed range.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Constant characteristic over a wide speed range of the spindle
- Increases the quality output of the machine

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0323-J854 | 30i-B Spindle Output Switching for One Spindle (Speed-Range Switching) |
| A02B-0326-J854 | 31i-B5 Spindle Output Switching for One Spindle (Speed-Range Switching) |
| A02B-0327-J854 | 31i-B Spindle Output Switching for One Spindle (Speed-Range Switching) |
| A02B-0328-J854 | 32i-B Spindle Output Switching for One Spindle (Speed-Range Switching) |
| A02B-0333-J854 | 35i-B Spindle Output Switching for One Spindle (Speed-Range Switching) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

388

Auxiliary / Spindle Speed Functions

Spindle Output Switching Function Expansion (Extended Spindle Output Switching Function)

Features

This function extends the Spindle Output Switching function so that winding switching can be performed for up to 8 spindle motors.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus (max. 4 spindles).

Benefits

- Constant characteristic over a wide speed range of the spindle
- Increases the quality output of the machine

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-J862 | 30i-B Extended Spindle Output Switching Function, Max. 8 Spindles |
| A02B-0326-J862 | 31i-B5 Extended Spindle Output Switching Function, Max.6 Spindles |
| A02B-0327-J862 | 31i-B Extended Spindle Output Switching Function, Max. 4 Spindles |
| A02B-0328-J862 | 32i-B Extended Spindle Output Switching Function, Max. 4 Spindles |
| A02B-0333-J862 | 35i-B Extended Spindle Output Switching Function, Max. 4 Spindles |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

389

Auxiliary / Spindle Speed Functions

Spindle Synchronous Control

Features

In a machine having two or more spindles (such as a multi-path lathe), this function provides a way to synchronize the spindles together.

When a workpiece is switched between two spindles during spindle rotation, or when the spindle speeds of two spindles are accelerated or decelerated while the spindles are holding a workpiece, the spindles can be rotated at the same speed. This is spindle speed synchronization.

When a workpiece is transferred from one spindle to the other, the rotations of the two spindles can be made in phase to each other, matching the angular displacement. This is called phase synchronization.

Benefits

- Simplification of the handling of the spindle in multi-spindle lathes

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-J858 | 30i-B Spindle Synchronous Control - Incl. Spindle Tandem Control |
| A02B-0326-J858 | 31i-B5 Spindle Synchronous Control - Incl. Spindle Tandem Control |
| A02B-0327-J858 | 31i-B Spindle Synchronous Control - Incl. Spindle Tandem Control |
| A02B-0328-J858 | 32i-B Spindle Synchronous Control - Incl. Spindle Tandem Control |
| A02B-0333-J858 | 35i-B Spindle Synchronous Control - Incl. Spindle Tandem Control |
| A02B-0339-J858 | 0i-TF Spindle Synchronous Control |
| A02B-0340-J858 | 0i-MF Spindle Synchronous Control |
| A02B-0349-J858 | 0i-TFP Spindle Synchronous Control |
| A02B-0350-J858 | 0i-MFP Spindle Synchronous Control |
| A02B-0353-J858 | 30i-BP Spindle Synchronous Control |
| A02B-0356-J858 | 31i-B5P Spindle Synchronous Control |
| A02B-0357-J858 | 31i-BP Spindle Synchronous Control |
| A02B-0358-J858 | 32i-BP Spindle Synchronous Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

390

Auxiliary / Spindle Speed Functions

Simple Spindle Synchronous Control

Features

Allows second spindle to be controlled as slave to the first one.

Benefits

- Multiple identical parts can be cut
- Double the output using two spindles
- No need to create two part programs

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0340-J748 | 0i-MF Simple Spindle Synchronous Control |
| A02B-0350-J748 | 0i-MFP Spindle Command Synchronous Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

391

Auxiliary / Spindle Speed Functions

Multi-Spindle Control

Features

In addition to the first spindle, the second to fourth, sixth or eighth spindle, can be controlled using an S command from the CNC. The maximum number of spindle is dependant on the CNC capabilities / type.

Spindle commands are specified using a single S command as conventionally done. A spindle is selected depending on the signal from the PMC or the address P command.

Gear change between two stages can be made for additional spindles in the same manner as for the first spindle. Parameter setting provides the possibility to set a maximum spindle speed for each spindle and clamp the speed of each spindle at the corresponding maximum spindle speed.

The position coder interfaces for the second to fourth spindles can be selected and added. The additional position coders are selected by signals from the PMC.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Simplification of the programming
- Increase of the throughput of the machine
- Overall increase of the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-J859 | 30i-B Multi-Spindle Control |
| A02B-0326-J859 | 31i-B5 Multi-Spindle Control |
| A02B-0327-J859 | 31i-B Multi-Spindle Control |
| A02B-0328-J859 | 32i-B Multi-Spindle Control |
| A02B-0333-J859 | 35i-B Multi-Spindle Control (Max. 4 Spindles) |
| A02B-0340-J859 | 0i-MF Multi-Spindle Control |
| A02B-0350-J859 | 0i-MFP Multi-Spindle Control |
| A02B-0353-J859 | 30i-BP Multi-Spindle Control |
| A02B-0356-J859 | 31i-B5P Multi-Spindle Control |
| A02B-0357-J859 | 31i-BP Multi-Spindle Control |
| A02B-0358-J859 | 32i-BP Multi-Spindle Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

392

Auxiliary / Spindle Speed Functions

Serial/Analog Spindle Control

Features

An analog spindle can be used with serial spindles at the same time. An analog spindle can be used for one of the controlled spindle axes of the system.

In this function, the spindle output control and the spindle output control by the PMC can be used for an analog spindle.

Benefits

- Possibility to mix analog and digital spindle control
- Improvement of the machine flexibility

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-R584 | 30i-B Serial / Analog Spindle Control |
| A02B-0326-R584 | 31i-B5 Serial / Analog Spindle Control |
| A02B-0327-R584 | 31i-B Serial / Analog Spindle Control |
| A02B-0328-R584 | 32i-B Serial / Analog Spindle Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

393

Auxiliary / Spindle Speed Functions

Spindle Positioning

Features

The workpiece mounted on the spindle can be positioned at a certain angle by moving the spindle attached to the spindle motor by a certain angle. This function is called the Spindle Positioning function.

During turning, use of this function allows for instance to perform a drilling operation at any position on the circumference of the workpiece.

The spindle position is detected by the position coder attached to the spindle.

Whether to use the spindle for spindle positioning (spindle positioning mode) or to use the spindle for spindle rotation (spindle rotation mode) is command by special M code (set by parameters).

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Addition of machining capabilities at the circumference of a turned part
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-J851 | 30i-B Spindle Positioning |
| A02B-0326-J851 | 31i-B5 Spindle Positioning |
| A02B-0327-J851 | 31i-B Spindle Positioning |
| A02B-0328-J851 | 32i-B Spindle Positioning |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

394

Auxiliary / Spindle Speed Functions

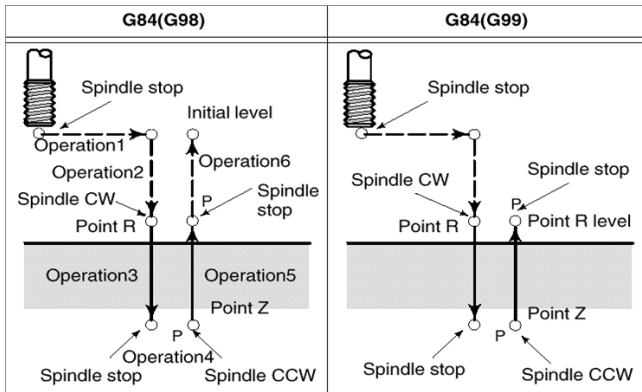

Rigid Tapping

Features

Rigid Tapping is a function for performing high-precision tapping by exercising position control so that the spindle rotation is synchronized with tapping axis feed at all times. In a tapping cycle (M series: G84/G74, T series: G84/G88), synchronous control is applied to the tapping operation of a tapping axis and the operation of the spindle.

Smart Rigid Tapping is an improvement of Rigid Tapping. It uses maximum spindle power during tapping over the whole spindle speed range. The servo axis closely follows the spindle axis, keeping the synchronous error small. This significantly reduces the cycle time for tapping.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Tools such as a float tapper are not needed
- Improvement of the tapped hole quality
- Reduction of tap breakage
- Reduction of tool holders cost by 50%
- Control of the depth for blind holes
- Better tap life
- Higher speed, higher precision tapping

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-J828 | 30i-B Rigid Tapping |
| A02B-0326-J828 | 31i-B5 Rigid Tapping |
| A02B-0327-J828 | 31i-B Rigid Tapping |
| A02B-0328-J828 | 32i-B Rigid Tapping |
| A02B-0333-R707 | 35i-B Rigid Tapping - Incl. Rigid Tapping Retract |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

395

Auxiliary / Spindle Speed Functions

Rigid Tapping by Manual Handle

Features

This function allows switching from a programmed command for rigid tapping to the handle mode. The tapping itself can then be performed while moving the tapping axis by manual handle.

Benefits

- Allows operator feedback by using handle for rigid tapping to overcome hard spots in material, hole misalignment
- Ideal for repair/rework, generally for large parts
- Tapping is possible without separate set up
- Other than Z axis tapping possible
- Minimizes handling for low volume parts

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J651 | 30i-B Rigid Tapping by Manual Handle |
| A02B-0326-J651 | 31i-B5 Rigid Tapping by Manual Handle |
| A02B-0327-J651 | 31i-B Rigid Tapping by Manual Handle |
| A02B-0328-J651 | 32i-B Rigid Tapping by Manual Handle |
| A02B-0339-J651 | 0i-TF Rigid Tapping by Manual Handle |
| A02B-0340-J651 | 0i-MF Rigid Tapping by Manual Handle |
| A02B-0349-J651 | 0i-TFP Rigid Tapping by Manual Handle |
| A02B-0350-J651 | 0i-MFP Rigid Tapping by Manual Handle |
| A02B-0353-J651 | 30i-BP Rigid Tapping by Manual Handle |
| A02B-0356-J651 | 31i-B5P Rigid Tapping by Manual Handle |
| A02B-0357-J651 | 31i-BP Rigid Tapping by Manual Handle |
| A02B-0358-J651 | 32i-BP Rigid Tapping by Manual Handle |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

396

Auxiliary / Spindle Speed Functions

Arbitrary Position Reference Setting for Cs Axis

Features

When a reference position return command (G28 or a manual reference position return) is executed for the first time since a serial spindle is placed in the Cs contour control mode, an arbitrary position can be set as the reference position by parameter setting.

In this case, the system performs reference position return, assuming that the current position is the reference position, so the system does not move the spindle to position it to the reference position.

Because the reference position return operation does not involve positioning to the spindle position specific to the spindle, this function can reduce the cycle time.

Benefits

- Reduction of the cycle time
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-S664 | 30i-B Arbitrary position reference setting for CS Axis |
| A02B-0326-S664 | 31i-B5 Arbitrary Position Reference Setting for CS Axis |
| A02B-0327-S664 | 31i-B Arbitrary Position Reference Setting for CS Axis |
| A02B-0328-S664 | 32i-B Arbitrary Position Reference Setting for Cs Axis |
| A02B-0339-S664 | 0i-TF Arbitrary Position Reference Setting for CS Axis |
| A02B-0340-S664 | 0i-MF Arbitrary Position Reference Setting for Cs-Axis |
| A02B-0349-S664 | 0i-TFP Arbitrary Position Reference Setting for CS-Axis |
| A02B-0350-S664 | 0i-MFP Arbitrary Position Reference Setting for CS-Axis |
| A02B-0353-S664 | 30i-BP Arbitrary Position Reference Setting for CS Axis |
| A02B-0356-S664 | 31i-B5P Arbitrary Position Reference Setting for CS Axis |
| A02B-0357-S664 | 31i-BP Arbitrary Position Reference Setting for Cs-Axis |
| A02B-0358-S664 | 32i-BP Arbitrary Position Reference Setting for CS Axis |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

397

Auxiliary / Spindle Speed Functions

M-Code Group Check Function

Features

The M code group check function checks if a combination of multiple M codes (up to three M codes) contained in a block is correct.

This function has two purposes:

- To detect if any of the multiple M codes specified in a block include an M code that must be specified alone
- To detect if any of the multiple M codes specified in a block include M codes that belong to the same group.

In either of these cases, alarm is issued.

Benefits

- Addition of check function to avoid programming mistakes
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0323-J922 | 30i-B M Code Group Check |
| A02B-0326-J922 | 31i-B5 M Code Group Check |
| A02B-0327-J922 | 31i-B M Code Group Check |
| A02B-0328-J922 | 32i-B M Code Group Check |
| A02B-0339-J922 | 0i-TF M-Code Group Check |
| A02B-0340-J922 | 0i-MF M-Code Group Check |
| A02B-0349-J922 | 0i-TFP M-Code Group Check |
| A02B-0350-J922 | 0i-MFP M-Code Group Check |
| A02B-0353-J922 | 30i-BP M-Code Group Check |
| A02B-0356-J922 | 31i-B5P M-Code Group Check |
| A02B-0357-J922 | 31i-BP M-Code Group Check |
| A02B-0358-J922 | 32i-BP M-Code Group Check |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

398

Auxiliary / Spindle Speed Functions

Spindle Speed Fluctuation Detection

Features

With the Spindle Speed Fluctuation Detection function, an overheat alarm OH0704 ("OVERHEAT") is raised and the spindle speed fluctuation detection alarm signal SPAL is issued when the spindle speed deviates from the specified speed due to machine conditions.

This function is useful to prevent preventing the seizure of the guide bushing.

G26 enables spindle speed fluctuation detection. G25 disables spindle speed fluctuation detection.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-TF (Type 1) and 0i-TF Plus (Type 0, Type 1).

Benefits

- Protection of machine and spindle parts
- Reduction of maintenance cases
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-J857 | 30i-B Spindle Speed Fluctuation Detection |
| A02B-0326-J857 | 31i-B5 Spindle Speed Fluctuation Detection |
| A02B-0327-J857 | 31i-B Spindle Speed Fluctuation Detection |
| A02B-0328-J857 | 32i-B Spindle Speed Fluctuation Detection |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

399

Auxiliary / Spindle Speed Functions

Spindle Control with Servo Motor

Features

This function allows to execute spindle rotation commands and spindle-speed functions such as rigid tapping, with a servo motor. It handles the servo motor used as a live tool axis as a single spindle. The option for spindle serial output and multi-spindle control function is necessary to use this function.

Spindle speed control with servo motor

Allows to perform speed control with rotation commands (S commands), using a servo motor as a live tool. At the switching between rotation commands and positioning commands, no reference position return is necessary.

Live tool indexing function

There are two types of live tool indexing functions:

- Execution of the commands in the next block without waiting for the completion of live tool indexing
- Execution of the next block after waiting for the completion of live tool indexing.

The type that does not wait for completion allows the user to specify commands for other axes before issuing the next command for the live tool indexing command axis. It also allows the user to check to see if live tool indexing has completed before issuing the next command for the live tool indexing command axis.

Rigid tapping with servo motor

Allows to perform rigid tapping with a servo motor as a rotation axis. The option for rigid tapping and canned cycle is necessary to use rigid tapping with servo motor.

Benefits

- Simplification of the machine structure
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-J978 | 30i-B Spindle Control with Servo Motor (Live Tool Control) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

400

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0326-J978 | 31i-B5 Spindle Control with Servo Motor (Live Tool Control) |
| A02B-0327-J978 | 31i-B Spindle Control with Servo Motor (Live Tool Control) |
| A02B-0328-J978 | 32i-B Spindle Control with Servo Motor (Live Tool Control) |
| A02B-0333-J978 | 35i-B Spindle Control with Servo Motor (Live Tool Control) |
| A02B-0339-J978 | 0i-TF Spindle Control with Servo Motor |
| A02B-0340-J978 | 0i-MF Spindle Control with Servo Motor |
| A02B-0349-J978 | 0i-TFP Spindle Control with Servo Motor |
| A02B-0350-J978 | 0i-MFP Spindle Control with Servo Motor |
| A02B-0353-J978 | 30i-BP Spindle Control with Servo Motor |
| A02B-0356-J978 | 31i-B5P Spindle Control with Servo Motor |
| A02B-0357-J978 | 31i-BP Spindle Control with Servo Motor |
| A02B-0358-J978 | 32i-BP Spindle Control with Servo Motor |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

401

Auxiliary / Spindle Speed Functions

Spindle Control with Cs Contour Control

Features

This function allows the execution of spindle rotation commands and spindle-speed functions such as rigid tapping, with a Cs contour control axis.

A speed control with rotation commands (S commands) is possible, using a Cs contour control axis. At the switching between rotation commands and positioning commands, no reference position return is necessary.

Benefits

- Increase of the flexibility of the spindle control
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-J985 | 30i-B Spindle Control with CS Contour Control |
| A02B-0326-J985 | 31i-B5 Spindle Control with CS Contour Control |
| A02B-0327-J985 | 31i-B Spindle Control with CS Contour Control |
| A02B-0328-J985 | 32i-B Spindle Control with CS Contour Control |
| A02B-0353-J985 | 30i-BP Spindle Control Function with CS Contour Control |
| A02B-0356-J985 | 31i-B5P Spindle Control Function with CS Contour Control |
| A02B-0357-J985 | 31i-BP Spindle Control Function with CS Contour Control |
| A02B-0358-J985 | 32i-BP Spindle Control Function with CS Contour Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

402

Auxiliary / Spindle Speed Functions

Cs Contour Control Speed Command Switching Function

Features

Cs Contour Control Speed Command Switching Function improves the functions Spindle Control with Servo Motor and Spindle Control with Cs Contour Control in the following ways:

1. Switching between positioning control and speed control becomes faster
2. The in-position width for speed control can be set separately
3. The in-position check for speed control and position control can be disabled by signal

Benefits

- Reduce cycle time when switching between speed control and position control

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-R530 | 30i-B CS Contour Control Speed Command Switching Function |
| A02B-0326-R530 | 31i-B5 CS Contour Control Speed Command Switching Function |
| A02B-0327-R530 | 31i-B CS Contour Control Speed Command Switching Function |
| A02B-0328-R530 | 32i-B CS Contour Control Speed Command Switching Function |
| A02B-0353-R530 | 30i-BP CS Contour Control Speed Command Switching Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

403

Auxiliary / Spindle Speed Functions

Servo/Spindle Synchronous Control

Features

The Servo/Spindle Synchronous Control function enables synchronous control between servo motor and spindle motor. The servo motor rotates in synchronization with the feedback pulses from the position coder of the main spindle. In addition, it is possible to superimpose a motion command from the CNC on the servo motor.

For 30i/31i/32i-B and 0i-MF/TF, this function is included in the Spindle Synchronous Control option.

Benefits

- Complex motion commands are easier and faster to program

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0334-S619 | PM i-A Synchronous Control between Servo and Spindle |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

404

Auxiliary / Spindle Speed Functions

Flexible Path Spindle Assignment (Spindle Switching Function)

Features

The Spindle Switching function can realize the spindle control in arbitrary combination of spindle motors and commands to a spindle.

The combination of spindle motors and commands can be switched by the signals of the spindle switching function.

Benefits

- Increase of the flexibility of the machine
- Simplification of programming
- Overall increase of the machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-R515 | 30i-B Flexible Path Spindle Assignment |
| A02B-0326-R515 | 31i-B5 Flexible Path Spindle Assignment |
| A02B-0327-R515 | 31i-B Flexible Path Spindle Assignment |
| A02B-0328-R515 | 32i-B Flexible Path Spindle Assignment |
| A02B-0353-R515 | 30i-BP Flexible Path Spindle Assignment |
| A02B-0356-R515 | 31i-B5P Flexible Path Spindle Assignment |
| A02B-0357-R515 | 31i-BP Flexible Path Spindle Assignment |
| A02B-0358-R515 | 32i-BP Flexible Path Spindle Assignment |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

405

Auxiliary / Spindle Speed Functions

Spindle Control Switching Function for High-Speed Machining

Features

Generally, motion command must be given after the spindle deceleration stop and the reference position return in the case of machining after switching from spindle speed control to Cs contour control.

When the Spindle Control Switching function for High-Speed cycle machining is used with high-speed cycle machining function, it is possible to start the machining on the Cs contour control mode without stopping the spindle rotation by establishing the reference position of the Cs contour control axis while the spindle is rotating.

In addition, the control mode of the spindle can be switched from Cs contour control to spindle speed control without stopping the spindle rotation by utilizing the signal, which is outputted during high-speed cycle machining.

As the acceleration/deceleration is not performed at changing control mode, the cycle time can be reduced.

Benefits

- Reduction of cycle time
- Increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------|
| A02B-0323-R608 | 30i-B High-Speed Cycle Machining - Spindle Control Switching Function |
| A02B-0326-R608 | 31i-B5 High-Speed Cycle Machining - Spindle Control Switching Function |
| A02B-0327-R608 | 31i-B High-Speed Cycle Machining - Spindle Control Switching Function |
| A02B-0353-R608 | 30i-BP CS Contour Control in High-Speed Switching Function |
| A02B-0356-R608 | 31i-B5P CS-Contour Control in High-Speed Switching Function |
| A02B-0357-R608 | 31i-BP CS Contour Control in High-Speed Switching Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

406

Auxiliary / Spindle Speed Functions

Thread Start Position Compensation for Changing Spindle Speed

Features

The thread cutting is correctly performed by this function even if the spindle override is changed in the interval of the thread cutting performing.

The spindle override can be changed only while the thread cutting is not performed.

Benefits

- Reduction of the cycle time
- Increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------|
| A02B-0323-S946 | 30i-B Thread Start Position Compensation in Changing Spindle Speed function |
| A02B-0326-S946 | 31i-B5 Thread Start Position Compensation in Changing Spindle Speed Function |
| A02B-0327-S946 | 31i-B Thread Start Position Compensation in Changing Spindle Speed Function |
| A02B-0328-S946 | 32i-B Thread Start Position Compensation in Changing Spindle Speed Function |
| A02B-0353-S946 | 30i-BP Thread Start Position Compensation in Changing Spindle Speed Function |
| A02B-0356-S946 | 31i-B5P Thread Start Position Compensation in Changing Spindle Speed Function |
| A02B-0357-S946 | 31i-BP Thread Start Position Compensation in Changing Spindle Speed Function |
| A02B-0358-S946 | 32i-BP Thread Start Position Compensation in Changing Spindle Speed Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

407

Auxiliary / Spindle Speed Functions

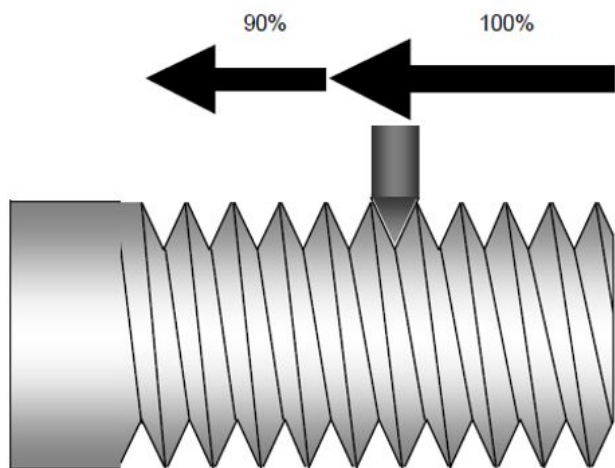

Arbitrary Speed Threading

Features

Spindle speed cannot be changed normally during threading because the tool movement could not synchronize with the spindle rotation. This function allows threading to change the spindle speed without losing the precision.

This function is available for constant lead threading, threading cycle, and multiple threading cycle.

Changing the spindle speed can prevent the vibration that occurs during threading at the specific spindle speed for large size machine. Besides, for repetitive machining, the same thread shape can be machined even if the spindle speed is changed between rough machining and finishing machining.

Benefits

- Reduction of vibrations
- Improvement of the threading quality on large parts
- Increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-R672 | 30i-B Arbitrary Speed Threading |
| A02B-0326-R672 | 31i-B5 Arbitrary Speed Threading |
| A02B-0327-R672 | 31i-B Arbitrary Speed Threading |
| A02B-0328-R672 | 32i-B Arbitrary Speed Threading |
| A02B-0339-R672 | 0i-TF Arbitrary Speed Threading |
| A02B-0340-R672 | 0i-MF Arbitrary Speed Threading |
| A02B-0349-R672 | 0i-TFP Arbitrary Speed Threading |
| A02B-0350-R672 | 0i-MFP Arbitrary Speed Threading |
| A02B-0353-R672 | 30i-BP Arbitrary Speed Threading |
| A02B-0356-R672 | 31i-B5P Arbitrary Speed Threading |
| A02B-0357-R672 | 31i-BP Arbitrary Speed Threading |
| A02B-0358-R672 | 32i-BP Arbitrary Speed Threading |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

408

Functions

Tool Functions / Tool Compensation

This section of the catalogue contains the functions related to Tool Management and Tool compensation.

Some of the functions detailed in the catalogue:

- Tool offset
- Tool Center Point control (TCP)
- Smooth TCP
- Automatic compensation
- Geometry compensation
- Tool wear compensation
- Advanced Tool Management
- Wheel wear compensation
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

409

Tool Functions / Tool Compensation

Tool Offset Pairs

Features

This function enhances the maximum number of tool offset to a higher maximum value. The tool offset number is specified with the last three digits in T-code value. The tool offset number is specified with the remaining digits after excluding the three digits used to specify the tool offset number.

The maximum size of the tool offset depends on the type of CNC. Refer to the ordering information table for further details.

Tool Offset, 400 Pairs is a basic function in 0i-LF Plus.

Benefits

- Increase of the tool capability of the CNC
- Increase of the flexibility of the machine

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0323-J721 | 30i-B Tool Offset, 999 Pairs |
| A02B-0323-J925 | 30i-B Tool Offset, 64 Pairs |
| A02B-0323-J926 | 30i-B Tool Offset, 99 Pairs |
| A02B-0323-J927 | 30i-B Tool Offset, 200 Pairs |
| A02B-0323-J928 | 30i-B Tool Offset, 400 Pairs |
| A02B-0323-S614 | 30i-B Tool Offset, 499 Pairs |
| A02B-0323-S622 | 30i-B Tool Offset, 2000 Pairs (up to 999 Pairs Available in Each Path) |
| A02B-0326-J721 | 31i-B5 Tool Offset, 999 Pairs |
| A02B-0326-J925 | 31i-B5 Tool Offset, 64 Pairs |
| A02B-0326-J926 | 31i-B5 Tool Offset, 99 Pairs |
| A02B-0326-J927 | 31i-B5 Tool Offset, 200 Pairs |
| A02B-0326-J928 | 31i-B5 Tool Offset, 400 Pairs |
| A02B-0326-S614 | 31i-B5 Tool Offset, 499 Pairs |
| A02B-0326-S622 | 31i-B5 Tool Offset, 2000 Pairs (up to 999 Pairs Available in Each Path) |
| A02B-0327-J721 | 31i-B Tool Offset, 999 Pairs |
| A02B-0327-J925 | 31i-B Tool Offset, 64 Pairs |
| A02B-0327-J926 | 31i-B Tool Offset, 99 Pairs |
| A02B-0327-J927 | 31i-B Tool Offset, 200 Pairs |
| A02B-0327-J928 | 31i-B Tool Offset, 400 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|------------------------------------------------------------------------|
| A02B-0327-S614 | 31i-B Tool Offset, 499 Pairs |
| A02B-0327-S622 | 31i-B Tool Offset, 2000 Pairs (up to 999 Pairs Available in Each Path) |
| A02B-0328-J721 | 32i-B Tool Offset Pairs, 999 Pairs |
| A02B-0328-J925 | 32i-B Tool Offset Pairs, 64 Pairs |
| A02B-0328-J926 | 32i-B Tool Offset Pairs, 99 Pairs |
| A02B-0328-J927 | 32i-B Tool Offset Pairs, 200 Pairs |
| A02B-0328-J928 | 32i-B Tool Offset Pairs, 400 Pairs |
| A02B-0328-S614 | 32i-B Tool Offset Pairs, 499 Pairs |
| A02B-0328-S622 | 32i-B Tool Offset Pairs, 2000 Pairs |
| A02B-0333-J927 | 35i-B Tool Offset, 200 Pairs |
| A02B-0334-J927 | PM i-A Tool Offset, 200 Pairs |
| A02B-0339-J927 | 0i-TF Tool Offset Pairs, 200 Pairs |
| A02B-0349-J927 | 0i-TFP Tool Offset Pairs, 200 Pairs |
| A02B-0353-J721 | 30i-BP Tool Offset Pairs - 999 Pairs |
| A02B-0353-J925 | 30i-BP Tool Offset Pairs - 64 Pairs |
| A02B-0353-J926 | 30i-BP Tool Offset Pairs - 99 Pairs |
| A02B-0353-J927 | 30i-BP Tool Offset Pairs - 200 Pairs |
| A02B-0353-J928 | 30i-BP Tool Offset Pairs - 400 Pairs |
| A02B-0353-S614 | 30i-BP Tool Offset Pairs - 499 Pairs |
| A02B-0353-S622 | 30i-BP Tool Offset Pairs - 2000 Pairs |
| A02B-0356-J721 | 31i-B5P Tool Offset Pairs - 999 Pairs |
| A02B-0356-J925 | 31i-B5P Tool Offset Pairs - 64 Pairs |
| A02B-0356-J926 | 31i-B5P Tool Offset Pairs - 99 Pairs |
| A02B-0356-J927 | 31i-B5P Tool Offset Pairs - 200 Pairs |
| A02B-0356-J928 | 31i-B5P Tool Offset Pairs - 400 Pairs |
| A02B-0356-S614 | 31i-B5P Tool Offset Pairs - 499 Pairs |
| A02B-0356-S622 | 31i-B5P Tool Offset Pairs - 2000 Pairs |
| A02B-0357-J721 | 31i-BP Tool Offset Pairs - 999 Pairs |
| A02B-0357-J925 | 31i-BP Tool Offset Pairs - 64 Pairs |
| A02B-0357-J926 | 31i-BP Tool Offset Pairs - 99 Pairs |
| A02B-0357-J927 | 31i-BP Tool Offset Pairs - 200 Pairs |
| A02B-0357-J928 | 31i-BP Tool Offset Pairs - 400 Pairs |
| A02B-0357-S614 | 31i-BP Tool Offset Pairs - 499 Pairs |
| A02B-0357-S622 | 31i-BP Tool Offset Pairs - 2000 Pairs |
| A02B-0358-J721 | 32i-BP Tool Offset Pairs - 999 Pairs |
| A02B-0358-J925 | 32i-BP Tool Offset Pairs - 64 Pairs |
| A02B-0358-J926 | 32i-BP Tool Offset Pairs - 99 Pairs |
| A02B-0358-J927 | 32i-BP Tool Offset Pairs - 200 Pairs |
| A02B-0358-J928 | 32i-BP Tool Offset Pairs - 400 Pairs |
| A02B-0358-S614 | 32i-BP Tool Offset Pairs - 499 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

411

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0358-S622 | 32i-BP Tool Offset Pairs - 2000 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

412

Tool Functions / Tool Compensation

Tool Offset Memory B

Features

Tool Offset Memory B provides separate offsets for geometry compensation and wear compensation. There is no difference between cutter compensation (D code) and tool length compensation (H code).

Setting Example for Tool Compensation Memory B

| Offset Number | Compensation Value (Geometry) | Compensation Value (Wear) | Common to D and H Codes |
|---------------|-------------------------------|---------------------------|-------------------------|
| 001 | 10100 | 0,100 | for D code |
| 002 | 20200 | 0,200 | for D code |
| 003 | 100000 | 0,100 | for H code |
| ... | ... | ... | ... |

Benefits

- Addition of the Tool Offset Memory B to the CNC
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-S616 | 30i-B Tool Offset Memory B |
| A02B-0326-S616 | 31i-B5 Tool Offset Memory B |
| A02B-0327-S616 | 31i-B Tool Offset Memory B |
| A02B-0328-S616 | 32i-B Tool Offset Memory B |
| A02B-0353-S616 | 30i-BP Tool Offset Memory B |
| A02B-0356-S616 | 31i-B5P Tool Offset Memory B |
| A02B-0357-S616 | 31i-BP Tool Offset Memory B |
| A02B-0358-S616 | 32i-BP Tool Offset Memory B |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

413

Tool Functions / Tool Compensation

Tool Offset Memory C

Features

Tool Offset Memory C provides for geometry compensation and wear compensation in separate tool compensation memory. Geometry compensation and wear compensation can thus be set separately. Separate memories are prepared for cutter compensation (for D code) and for tool length compensation (for H code).

Setting Example for Tool Compensation Memory C

| Offset Number | D Code | | H Code | |
|---------------|-------------------------------|---------------------------|-------------------------------|---------------------------|
| | Compensation Value (Geometry) | Compensation Value (Wear) | Compensation Value (Geometry) | Compensation Value (Wear) |
| 001 | 10000 | 0,100 | 100000 | 0,100 |
| 002 | 20000 | 0,200 | 200000 | 0,300 |
| ... | ... | ... | ... | ... |

This function is a basic function in FANUC Series 0i-MF and 0i-MF Plus.

Benefits

- Addition of the Tool Offset Memory C to the CNC
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J937 | 30i-B Tool Offset Memory C |
| A02B-0326-J937 | 31i-B5 Tool Offset Memory C |
| A02B-0327-J937 | 31i-B Tool Offset Memory C |
| A02B-0328-J937 | 32i-B Tool Offset Memory C |
| A02B-0333-J937 | 35i-B Tool Offset Memory C |
| A02B-0353-J937 | 30i-BP Tool Offset Memory C |
| A02B-0356-J937 | 31i-B5P Tool Offset Memory C |
| A02B-0357-J937 | 31i-BP Tool Offset Memory C |
| A02B-0358-J937 | 32i-BP Tool Offset Memory C |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

414

Tool Functions / Tool Compensation

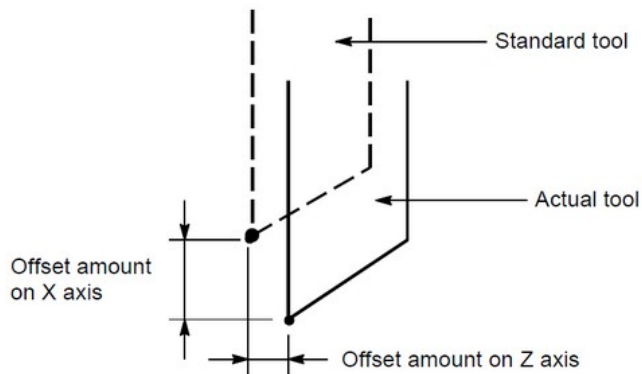

Tool Offset

Features

The Tool Offset function is an option on the milling software of the Series 30i CNC. The programmed travel distance of the tool can be increased or decreased by a specified tool offset value or by twice the offset value. The Tool Offset function can also be applied to an additional axis.

The Tool Offset function is standard in the turning software of the Series 30i CNC. It is used to compensate for the difference when the tool actually used differs from the imagined tool used in programming (usually standard tool).

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------|
| A02B-0323-S617 | 30i-B Tool Offset |
| A02B-0326-S617 | 31i-B5 Tool Offset |
| A02B-0327-S617 | 31i-B Tool Offset |
| A02B-0328-S617 | 32i-B Tool Offset |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

415

Tool Functions / Tool Compensation

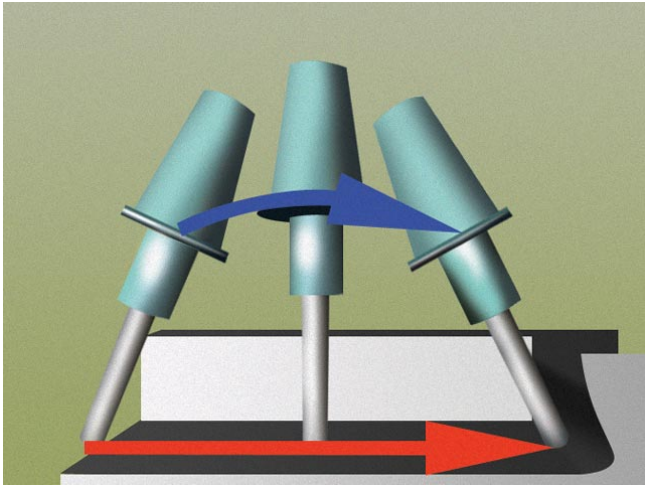

Tool Center Point Control

Features

On a 5-axis machine having two rotary axes that turn a tool or table, this function performs tool length compensation constantly, even in the middle of a block, and exerts control so that the tool center point moves along the specified path.

Benefits

- The tool center point will move along the specified path even if the direction of the tool changes with respect to the workpiece.
- May be used with all classes of 5-axes machine tools
- Uniform parameters with other 5-axes functions.

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-S677 | 30i-B Tool Center Point Control |
| A02B-0326-S677 | 31i-B5 Tool Center Point Control |
| A02B-0327-S677 | 31i-B Tool Center Point Control |
| A02B-0328-S677 | 32i-B Tool Center Point Control |
| A02B-0353-S677 | 30i-BP Tool Center Point Control (TCP) |
| A02B-0356-S677 | 31i-B5P Tool Center Point Control (TCP) |
| A02B-0357-S677 | 31i-BP Tool Center Point Control (TCP) |
| A02B-0358-S677 | 32i-BP Tool Center Point Control (TCP) |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

416

Tool Functions / Tool Compensation

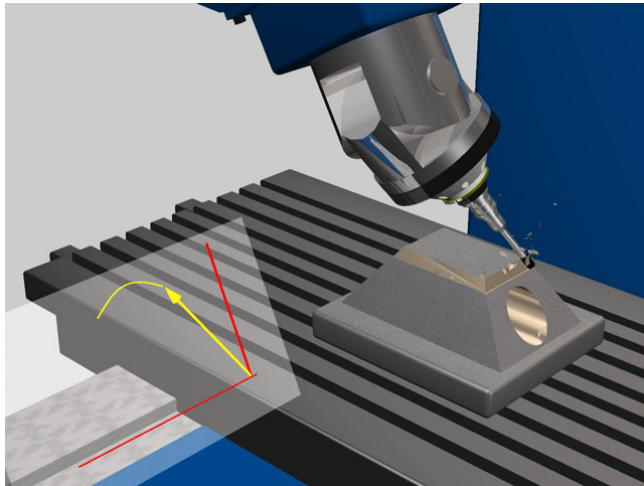

Tool Posture Control

Features

The function of Tool Posture Control, former Tool Posture Control of Tool Center Point Control for 5-Axis Machining, is in a way an extension of Tool Center Point Control, which controls the path of the tool centre point on a straight line.

Additionally the control of the tool is linked to the vector between the start and end point such that unintentional stock removal by the side of the cutting tool is avoided. Tool Posture Control is mainly used in side cutting, if pockets or forms with varying angles are being milled.

Benefits

- Usage of different tool cutter radius for side cutting in 5-axis machining
- Higher machining flexibility
- Machining of complex 5-axis parts (e.g. pyramids and cones)

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------|
| A02B-0323-S994 | 30i-B Tool Posture Control of Tool Center Point Control (TCP) for 5-Axes Machining |
| A02B-0326-S994 | 31i-B5 Tool Posture Control of Tool Center Point Control (TCP) for 5-Axes Machining |
| A02B-0353-S994 | 30i-BP Tool Posture Control |
| A02B-0356-S994 | 31i-B5P Tool Posture Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

417

Tool Functions / Tool Compensation

Cutting Point Command

Features

Whether when using end, ball or bull-nose milling tools, the Cutting Point Command function enables the definition of the orientation of the tool relative to the programmed path – information that previously would have had to be input to the CAM system. Now an operator may determine the optimum cutting conditions at the machine and the FANUC CNC will internally re-calculate the required tool path.

Benefits

- Reduced Setup/Machining Time
- Cutting conditions can be easily adjusted/optimized by the operator
- Same part program can be used with various tools such as end, ball or bull-nose milling tools

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-S996 | 30i-B Cutting Point Command |
| A02B-0326-S996 | 31i-B5 Cutting Point Command |
| A02B-0353-S996 | 30i-BP Cutting Point Command |
| A02B-0356-S996 | 31i-B5P Cutting Point Command |
| A02B-0357-S996 | 31i-BP Cutting Point Command |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

418

Tool Functions / Tool Compensation

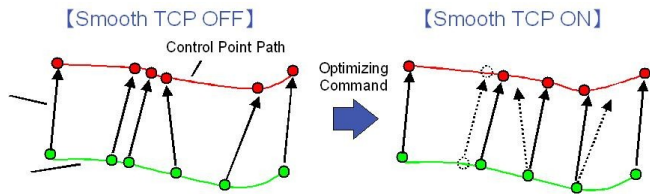

Smooth TCP

Features

The function Smooth TCP is based on the Tool Center Point Control function and compensates deviations in the tool orientation.

In addition Smooth TCP also ignores redundant commands with regard to the tool centre-point position.

Benefits

- Shorter cycle times (in extreme cases, time savings of up to 44%)
- Smoother surfaces
- Minimisation of machine or tool wear due to avoidance of jerk in the motion profile

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-R639 | 30i-B Smooth Tool Center Point Control (TCP) |
| A02B-0326-R639 | 31i-B5 Smooth Tool Center Point Control (TCP) |
| A02B-0327-R639 | 31i-B Smooth Tool Center Point Control (TCP) |
| A02B-0350-R639 | 0i-MFP Smooth TCP |
| A02B-0353-R639 | 30i-BP Smooth TCP |
| A02B-0356-R639 | 31i-B5P Smooth TCP |
| A02B-0357-R639 | 31i-BP Smooth TCP |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

419

Tool Functions / Tool Compensation

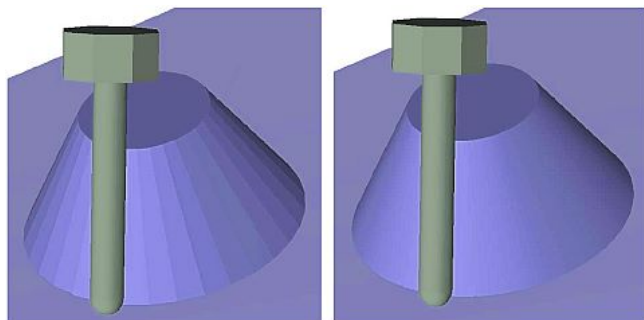

High-Speed Smooth TCP

Features

Under Tool Posture Control, the tool posture is controlled every moment for operation on the plane formed by the tool postures (tool length compensation vectors) at the start point and the end point of a block.

This control method is suitable for machining a plane with the side of a tool using the tool center point control.

Adding to the Tool Posture Control, the High-Speed Smooth TCP function generates and interpolates smooth surfaces from commanded tool center points and tool postures.

Traditionally, when a free surface is machined by Tool Posture Control, the free surface is approximated by polyhedrons (left illustration). When using the Smooth TCP, the free surface can be machined with smooth surfaces and the machining quality can be improved (right illustration).

This feature is suitable for machining free surfaces with tool side using Tool Center Point control. This feature has two modes, one is Speed priority mode in which speed has higher priority and the other is Surface quality priority mode in which quality of machining surface has higher priority. One of those modes can be selected by a command.

Benefits

- Shorter cycle times (in extreme cases, time savings of up to 44%)
- Smoother surfaces
- Minimisation of machine or tool wear due to avoidance of jerk in the motion profile

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0323-R677 | 30i-B High-Speed Smooth TCP (Tool Center Point Control) - Incl. Smooth TCP, Tool Posture Control, Cutting Point Command Expansion of Axis Command in TCP Control |
| A02B-0326-R677 | 31i-B5 High-Speed Smooth TCP (Tool Center Point Control) - Incl. Smooth TCP, Tool Posture Control, Cutting Point Command Expansion of Axis Command in TCP Control |
| A02B-0353-R677 | 30i-BP High-Speed Smooth TCP |
| A02B-0356-R677 | 31i-B5P High-Speed Smooth TCP |
| A02B-0357-R677 | 31i-BP High-Speed Smooth TCP |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

420

Tool Functions / Tool Compensation

Expansion of Axis Command in Tool Center Point Control

Features

In the tool center point control mode, this function enables to command an axis which is not controlled by tool center point control ("non 5-axis machining control axis"). This allows to move peripheral axes during tool center point control mode. The maximum number of non 5-axis machining control axes which can be specified in one block is 10 axes in 30i-B series, 2 axes in 31i-B5 series and 1 axis in 31i-B series.

Benefits

- Move peripheral axes during 5-axis machining and reduce cycle time

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------------|
| A02B-0323-R592 | 30i-B Expansion of Axis Command in Tool Center Point Control (TCP), for Linear Interpolation G01 |
| A02B-0326-R592 | 31i-B5 Expansion of Axis Command in Tool Center Point Control (TCP), for Linear Interpolation G01 |
| A02B-0327-R592 | 31i-B Expansion of Axis Command in Tool Center Point Control (TCP), for Linear Interpolation G01 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

421

Tool Functions / Tool Compensation

Y-Axis Offset

Features

Y-Axis Offset function is used in turning controls equipped with a third linear axis. When the Y axis, one of the basic three axes, is used with a lathe system, this function performs Y axis offset.

If the tool geometry / wear offset options are provided, both tool geometry offset and tool wear offset are effective to Y axis offset.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Addition of an additional offset capability for the Y axis
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------|
| A02B-0323-J934 | 30i-B Y-Axis Offset |
| A02B-0326-J934 | 31i-B5 Y-Axis Offset |
| A02B-0327-J934 | 31i-B Y-Axis Offset |
| A02B-0328-J934 | 32i-B Y-Axis Offset |
| A02B-0353-J934 | 30i-BP Y-Axis Offset |
| A02B-0356-J934 | 31i-B5P Y-Axis Offset |
| A02B-0357-J934 | 31i-BP Y-Axis Offset |
| A02B-0358-J934 | 32i-BP Y-Axis Offset |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

422

Tool Functions / Tool Compensation

4th/5th Axis Offset

Features

This function performs the tool offset for the 4th and the 5th axis following the basic three axes X, Z, Y. The number of tool offset pairs are 32 pairs, the same as for the X, Z, Y axis.

It is possible to divide into a tool wear offset and a tool geometry offset by specifying a option. The number of 32 pairs can be optionally extended to 64, 99, 400, 999, 2000 pairs. The number of maximum pairs depends on the CNC type.

Benefits

- Addition of tool offset for the 4th and 5th axis
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R517 | 30i-B 4th / 5th Axis Offset (Lathe System) |
| A02B-0326-R517 | 31i-B5 4th / 5th Axis Offset (Lathe System) |
| A02B-0327-R517 | 31i-B 4th / 5th Axis Offset (Lathe System) |
| A02B-0328-R517 | 32i-B 4th / 5th Axis Offset (Lathe System) |
| A02B-0339-R517 | 0i-TF 4th/5th Axis Offset |
| A02B-0349-R517 | 0i-TFP 4th / 5th Axis Offset |
| A02B-0353-R517 | 30i-BP 4th / 5th Axis Offset |
| A02B-0356-R517 | 31i-B5P 4th / 5th Axis Offset |
| A02B-0357-R517 | 31i-BP 4th / 5th Axis Offset |
| A02B-0358-R517 | 32i-BP 4th / 5th Axis Offset |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

423

Tool Functions / Tool Compensation

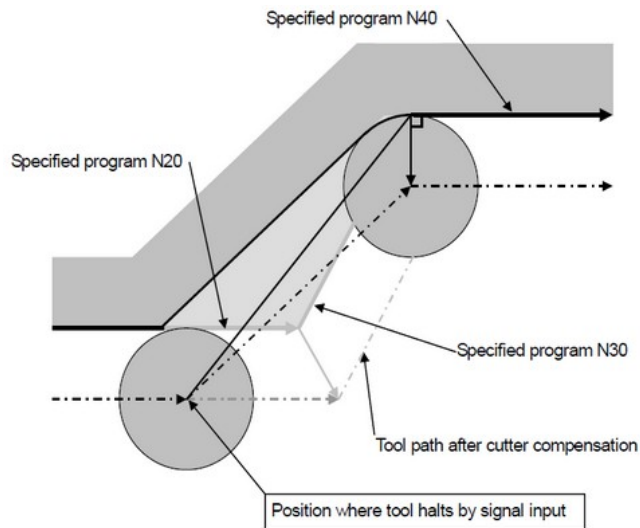

Tool Radius / Tool Nose Radius Compensation

Features

The Tool Radius Compensation function can offset a programmed tool path by the tool radius set in the CNC when machining is performed.

When the radius of the tool to be used for machining is measured and set as the offset value in the CNC, the tool moves along the offset path to cut a programmed profile. As a consequence, when the tool diameter changes, only the offset value needs to be changed and it is not necessary to modify the program.

To obtain the actual offset tool path, the CNC internally calculates intersections of a straight line and a straight line, an arc and an arc, and a straight line and an arc automatically. The programmer only has to program a machining profile, therefore the programming can be done very easily.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------|
| A02B-0323-J930 | 30i-B Tool Radius (Cutter) Compensation and Tool Nose Radius Compensation |
| A02B-0326-J930 | 31i-B5 Tool Radius (Cutter) Compensation and Tool Nose Radius Compensation |
| A02B-0327-J930 | 31i-B Tool Radius (Cutter) Compensation and Tool Nose Radius Compensation |
| A02B-0328-J930 | 32i-B Tool Radius (Cutter) Compensation and Tool Nose Radius Compensation |
| A02B-0333-J930 | 35i-B Tool Radius (Cutter) Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

424

Tool Functions / Tool Compensation

Automatic Tool Nose Radius Compensation

Features

When using the Tool Nose Radius Compensation function, it is necessary to command the direction offset by G41 / G42 depending on the cutting direction.

With the Automatic Tool Nose Radius Compensation function, it is possible to determinand set the direction offset automatically according to the current cutting direction.

Benefits

- Easy Programming

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-S942 | 30i-B Automatic Tool Nose Radius Compensation |
| A02B-0326-S942 | 31i-B5 Automatic Tool Nose Radius Compensation |
| A02B-0327-S942 | 31i-B Automatic Tool Nose Radius Compensation |
| A02B-0328-S942 | 32i-B Automatic Tool Nose Radius Compensation |
| A02B-0353-S942 | 30i-BP Automatic Tool Nose Radius Compensation |
| A02B-0356-S942 | 31i-B5P Automatic Tool Nose Radius Compensation |
| A02B-0357-S942 | 31i-BP Automatic Tool Nose Radius Compensation |
| A02B-0358-S942 | 32i-BP Automatic Tool Nose Radius Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

425

Tool Functions / Tool Compensation

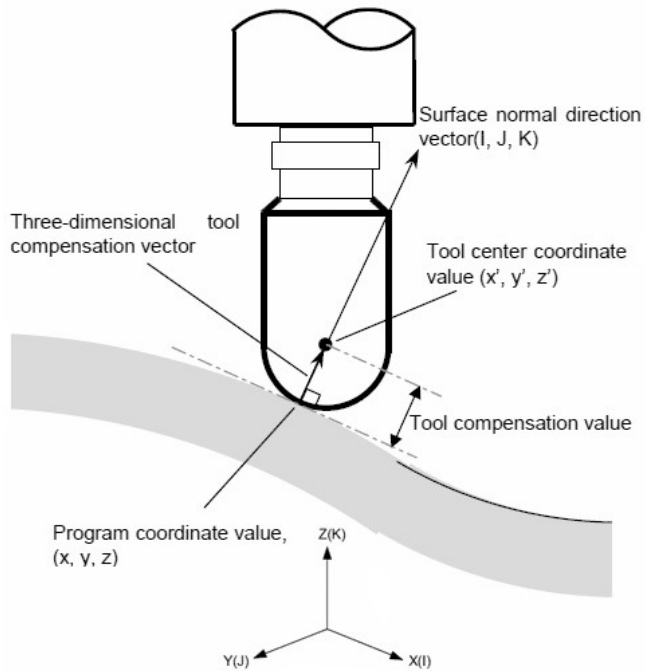

3-Dimensional Tool Compensation

Features

The 3-Dimensional Tool Compensation function, used on machines having three basic orthogonal axes, calculates a compensation vector perpendicular to the machining surface as a three-dimensional compensation vector.

Typically, this function is used for ball-nosed cutters on 3-axis machines.

This function is different from the similar 5-axis compensation functions.

Benefits

- Programming uncompensated surface coordinates of free-form 3D sculptured surfaces typically in Die and Mold applications
- 3-dimensional compensation for ball-nosed cutters
- Can easily change to a different sized ball-nosed cutter without re-calculating the part surface coordinates

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J727 | 30i-B 3-Dimensional Tool Compensation |
| A02B-0326-J727 | 31i-B5 3-Dimensional Tool Compensation |
| A02B-0327-J727 | 31i-B 3-Dimensional Tool Compensation |
| A02B-0328-J727 | 32i-B 3-Dimensional Tool Compensation |
| A02B-0353-J727 | 30i-BP 3-D Tool Compensation |
| A02B-0356-J727 | 31i-B5P 3-D Tool Compensation |
| A02B-0357-J727 | 31i-BP 3-D Tool Compensation |
| A02B-0358-J727 | 32i-BP 3-D Tool Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

426

Tool Functions / Tool Compensation

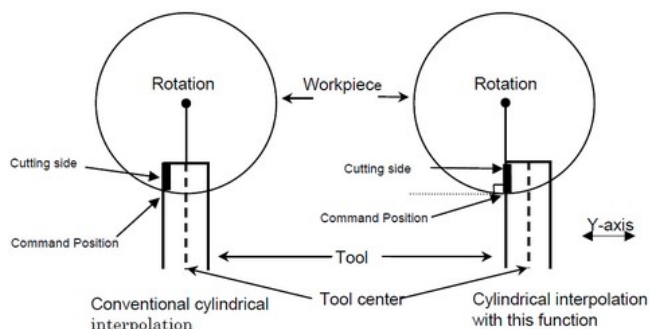

Cutting Point Interpolation for Cylindrical Interpolation

Features

The Cutting Point Interpolation function for Cylindrical Interpolation provides an easy use of the cutter compensation when performing cylindrical interpolation.

The conventional cylindrical interpolation function controls the tool center so that the tool axis always moves along a specified path on the cylindrical surface, towards the rotary axis (cylindrical axis) of the workpiece. The Cutting Point Interpolation for Cylindrical Interpolation function controls the tool so that the tangent of the tool and the cutting surface of a contour always passes the rotation center of the workpiece. This means that the cutting surface of the contour is always perpendicular to the cylinder.

With this function, the figure on the cutting surface can always be kept constant regardless of the cutter compensation value of the tool used.

As shown on the picture the tool is controlled in the offset axis (Y- axis) direction that is perpendicular to the tool centre.

Benefits

- Addition of cutting capabilities for cylindrical shapes
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-S674 | 30i-B Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0326-S674 | 31i-B5 Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0327-S674 | 31i-B Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0328-S674 | 32i-B Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0339-S674 | 0i-TF Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0340-S674 | 0i-MF Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0349-S674 | 0i-TFP Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0350-S674 | 0i-MFP Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0353-S674 | 30i-BP Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0356-S674 | 31i-B5P Cutting Point Interpolation for Cylindrical Interpolation |
| A02B-0357-S674 | 31i-BP Cutting Point Interpolation for Cylindrical Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

427

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0358-S674 | 32i-BP Cutting Point Interpolation for Cylindrical Interpolation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

428

Tool Functions / Tool Compensation

Tool Geometry/Wear Compensation

Features

The Tool Geometry/Wear Compensation function changes the tool compensation memory configuration depending on whether the tool geometry and wear compensation functions are provided or not.

The following data items in tool compensation memory are affected:

- X- and Z-axis compensation values in tool offset
- Compensation value R when tool nose radius compensation is provided
- Y-axis compensation value when Y-axis offset is provided

When the tool geometry and wear compensation functions are not provided, there is no distinction between geometry compensation memory and wear compensation memory.

Therefore, a sum of the geometry compensation value and wear compensation value is set in compensation memory. When the tool geometry and wear compensation functions are provided, geometry compensation memory and wear compensation memory are prepared separately. In this case, geometry compensation values and wear compensation values can be set separately.

This function is a basic function in FANUC Series 0i-TF and 0i-TF Plus.

Benefits

- Addition of compensation capabilities to the CNC
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-J931 | 30i-B Tool Geometry and Wear Offset |
| A02B-0326-J931 | 31i-B5 Tool Geometry and Wear Offset |
| A02B-0327-J931 | 31i-B Tool Geometry and Wear Offset |
| A02B-0328-J931 | 32i-B Tool Geometry and Wear Offset |
| A02B-0353-J931 | 30i-BP Tool Geometry / Wear Compensation |
| A02B-0356-J931 | 31i-B5P Tool Geometry / Wear Compensation |
| A02B-0357-J931 | 31i-BP Tool Geometry / Wear Compensation |
| A02B-0358-J931 | 32i-BP Tool Geometry / Wear Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

429

Tool Functions / Tool Compensation

2nd Geometry Tool Offset

Features

The 2nd Geometry Tool Offset function provides compensation for the difference in tool mounting position or in selected position; the second geometry tool offset can be provided in addition to tool offset.

Data that can be set for second geometry tool offset is the compensation values for the X-, Z-, and Y-axes.

Benefits

- Addition of offset compensation
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J980 | 30i-B 2nd Geometry Tool Offset |
| A02B-0326-J980 | 31i-B5 2nd Geometry Tool Offset |
| A02B-0327-J980 | 31i-B 2nd Geometry Tool Offset |
| A02B-0328-J980 | 32i-B 2nd Geometry Tool Offset |
| A02B-0339-J980 | 0i-TF 2nd Geometry Tool Offset |
| A02B-0349-J980 | 0i-TFP 2nd Geometry Tool Offset |
| A02B-0353-J980 | 30i-BP 2nd Geometry Tool Offset |
| A02B-0356-J980 | 31i-B5P 2nd Geometry Tool Offset |
| A02B-0357-J980 | 31i-BP 2nd Geometry Tool Offset |
| A02B-0358-J980 | 32i-BP 2nd Geometry Tool Offset |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

430

Tool Functions / Tool Compensation

Customized Data Expansion

Features

This function provides 16 (or 36) additional customizable data columns for the Tool Management option. The data is located in columns 5 through 20 (or 5 through 40).

Benefits

- Custom tooling data HMI without using high level programming languages
- Customizable tool data management for Balluff ID, adaptive control, etc
- Greater flexibility for machine-specific 'Tool Management' customization
- Enhanced tool data presentation.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------|
| A02B-0323-S834 | 30i-B Tool Management Function - Customized Data Expansion (5 - 20) |
| A02B-0323-S835 | 30i-B Tool Management Function - Customized Data Expansion (5 - 40) |
| A02B-0326-S834 | 31i-B5 Tool Management Function - Customized Data Expansion (5 - 20) |
| A02B-0326-S835 | 31i-B5 Tool Management Function - Customized Data Expansion (5 - 40) |
| A02B-0327-S834 | 31i-B Tool Management Function - Customized Data Expansion (5 - 20) |
| A02B-0327-S835 | 31i-B Tool Management Function - Customized Data Expansion (5 - 40) |
| A02B-0328-S834 | 32i-B Tool Management Function - Customized Data Expansion (5 - 20) |
| A02B-0328-S835 | 32i-B Tool Management Function - Customized Data Expansion (5 - 40) |
| A02B-0339-S834 | 0i-TF Tool Management Function: Custom. Data Expansion (5-20) |
| A02B-0339-S835 | 0i-TF Tool Management Function: Custom. Data Expansion (5-40) |
| A02B-0340-S834 | 0i-MF Tool Management Function: Custom. Data Expansion (5-20) |
| A02B-0340-S835 | 0i-MF Tool Management Function: Custom. Data Expansion (5-40) |
| A02B-0349-S834 | 0i-TFP Tool Management Function: Customised Data Expansion 5 - 20 |
| A02B-0349-S835 | 0i-TFP Tool Management Function: Customised Data Expansion 5 - 40 |
| A02B-0350-S834 | 0i-MFP Tool Management Function: Customised Data Expansion 5 - 20 |
| A02B-0350-S835 | 0i-MFP Tool Management Function: Customised Data Expansion 5 - 40 |
| A02B-0353-S834 | 30i-BP Tool Management Function - Customised Data Expansion 5-20 |
| A02B-0353-S835 | 30i-BP Tool Management Function - Customised Data Expansion 5-40 |
| A02B-0356-S834 | 31i-B5P Tool Management Function - Customised Data Expansion 5-20 |
| A02B-0356-S835 | 31i-B5P Tool Management Function - Customised Data Expansion 5-40 |
| A02B-0357-S834 | 31i-BP Tool Management Function - Customised Data Expansion 5-20 |
| A02B-0357-S835 | 31i-BP Tool Management Function - Customised Data Expansion 5-40 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

431

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0358-S834 | 32i-BP Tool Management Function - Customised Data Expansion 5-20 |
| A02B-0358-S835 | 32i-BP Tool Management Function - Customised Data Expansion 5-40 |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

432

Tool Functions / Tool Compensation

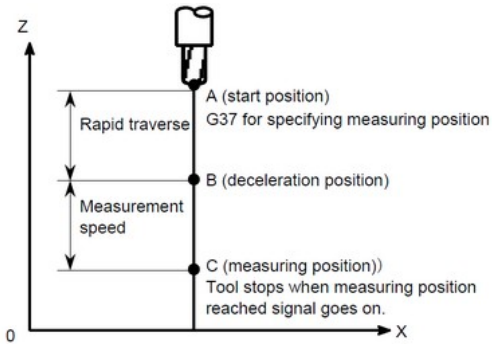

Compensation = (Current compensation) + [(Coordinate at tool stop) - (Coordinate at specification of measuring position)]

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Automatic Tool Length Measurement

Features

The Automatic Tool Length Measurement function provides the capability to automatically measure tools. The difference between the coordinate value of tool when the tool end has reached the measuring position and coordinate value of the measuring position is automatically measured, calculated and added to the currently set tool offset amount by CNC system.

The machine must be equipped with measuring devices, for example touch probe, so that a signal is sent when the tool end has reached the measuring position.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-MF and 0i-MF Plus.

Benefits

- Automation of the tool length measurement
- Simplification of the machine operation
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------------------------------|
| A02B-0323-S618 | 30i-B Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0326-S618 | 31i-B5 Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0327-S618 | 31i-B Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0328-S618 | 32i-B Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |

433

Tool Functions / Tool Compensation

High-Speed Measuring Position Reach Signal Input

Features

Measurement can be made using the high-speed measuring position reached signals HAE1 to HAE8 (connected directly to the CNC). This procedure is provided instead of the standard measuring position reached signals. Up to eight signal inputs can be used with the high-speed measuring position reached signals.

When using the standard function through the PMC, the delay and variation in detecting the input of a measuring position reached signal is 0 to 2 ms on the CNC side, excluding the PMC side.

A delay and variation in detecting the input of a high-speed measuring position reached signal can be reduced to 0.1 ms or lower, so that high-precision measurement can be made.

Benefits

- Automation of the tool length measurement
- Simplification of the machine operation
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-S998 | 30i-B High-Speed Measuring Position Reach Signal Input |
| A02B-0326-S998 | 31i-B5 High-Speed Measuring Position Reach Signal Input |
| A02B-0327-S998 | 31i-B High-Speed Measuring Position Reach Signal Input |
| A02B-0328-S998 | 32i-B High-Speed Measuring Position Reach Signal Input |
| A02B-0353-S998 | 30i-BP High-Speed Measuring Position Reach Signal Input |
| A02B-0356-S998 | 31i-B5P High-Speed Measuring Position Reach Signal Input |
| A02B-0357-S998 | 31i-BP High-Speed Measuring Position Reach Signal Input |
| A02B-0358-S998 | 32i-BP High-Speed Measuring Position Reach Signal Input |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

434

Tool Functions / Tool Compensation

Tool Length / Work Zero Point Measurement

Features

Tool Length /Work Zero Point Measurement function has been designed to simplify the procedure of tool length measurement.

This function facilitates the machining setup, resulting in a reduced machining setup time. The function eases the measurement of the workpiece origin offset. With this function, the operator can program a T / M code or a reference position return by specifying a manual numerical command on the tool length offset measurement screen.

Benefits

- Automation of the tool length measurement
- Simplification of the machine operation
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-J668 | 30i-B Tool Length / Work Zero Point Measurement |
| A02B-0326-J668 | 31i-B5 Tool Length / Work Zero Point Measurement |
| A02B-0327-J668 | 31i-B Tool Length / Work Zero Point Measurement |
| A02B-0328-J668 | 32i-B Tool Length/Work Zero Point Measurement |
| A02B-0353-J668 | 30i-BP Tool Length / Work Zero Point Measurement |
| A02B-0356-J668 | 31i-B5P Tool Length / Work Zero Point Measurement |
| A02B-0357-J668 | 31i-BP Tool Length / Work Zero Point Measurement |
| A02B-0358-J668 | 32i-BP Tool Length / Work Zero Point Measurement |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

435

Tool Functions / Tool Compensation

Automatic Tool Offset

Features

The Automatic Tool Offset function provides the capability to automatically measure tools. The difference between the coordinate value of tool when the tool end has reached the measuring position and coordinate value of the measuring position is automatically measured, calculated and added to the currently set tool offset amount by CNC system.

The machine must be equipped with measuring devices so that a signal is sent when the tool end has reached the measuring position.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-TF (Type 1) and 0i-TF Plus (Type 0, Type 1).

Benefits

- Automation of the tool offset measurement
- Simplification of the machine operation
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------------------------------------|
| A02B-0323-S618 | 30i-B Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0326-S618 | 31i-B5 Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0327-S618 | 31i-B Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0328-S618 | 32i-B Automatic Tool Length Measurement (CNC for Milling) / Automatic Tool Offset (CNC for Turning) |
| A02B-0339-S618 | 0i-TF Automatic Tool Offset |
| A02B-0349-S618 | 0i-TFP Automatic Tool Offset |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

436

Tool Functions / Tool Compensation

Direct Input of Offset Value Measured B

Features

The Direct Input of Offset Value Measured B function provides the capability to input offset values using a touch probe. Using the touch probe and by manually making the tool contact the touch probe, it is possible to set the offset amount of that tool automatically in the tool offset amount memory.

It is also possible to set the workpiece coordinate system shift amount automatically. The tool setter function for single-turret / two-spindle lathes is also available, which allows to use the direct input of the tool offset value measured B for each spindle in a single-turret / two-spindle lathe.

This function is a basic function in FANUC Series 0i-TF (Type 1, Type 3) and 0i-F Plus (Type 0, 1 and 3).

Benefits

- Automation of the tool offset
- Simplification of the machine operation
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-J933 | 30i-B Direct Input Value Measured B |
| A02B-0326-J933 | 31i-B5 Direct Input Value Measured B |
| A02B-0327-J933 | 31i-B Direct Input Value Measured B |
| A02B-0328-J933 | 32i-B Direct Input Value Measured B |
| A02B-0349-J933 | 0i-TFP Direct Input of Tool Offset Value Measured B |
| A02B-0353-J933 | 30i-BP Direct Input of Offset Value Measured B |
| A02B-0356-J933 | 31i-B5P Direct Input of Offset Value Measured B |
| A02B-0357-J933 | 31i-BP Direct Input of Offset Value Measured B |
| A02B-0358-J933 | 32i-BP Direct Input of Offset Value Measured B |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

437

Tool Functions / Tool Compensation

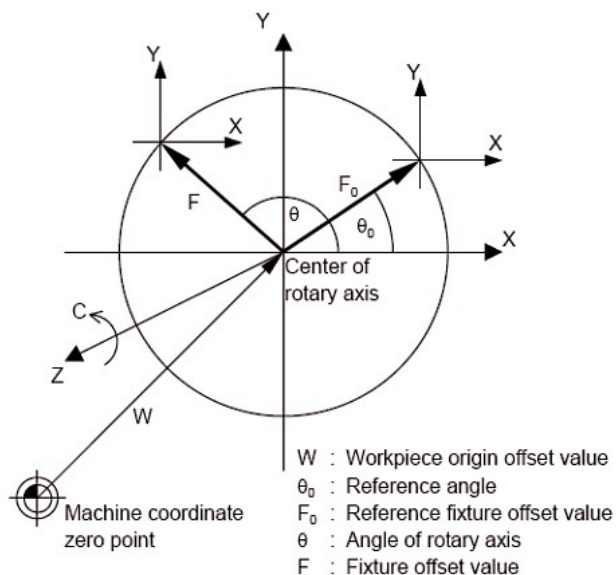

Rotary Table Dynamic Fixture Offset

Features

The Rotary Table Dynamic Fixture Offset function avoids for the operator to re-set the workpiece coordinate system whenever the rotary table rotates before cutting is started.

Benefits

- Ability to adjust part location at the control level
- No need to repost programs if rotary axis is misaligned
- Ease of operation
- Reduce Setups

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-S728 | 30i-B Rotary Table Dynamic Fixture Offset |
| A02B-0326-S728 | 31i-B5 Rotary Table Dynamic Fixture Offset |
| A02B-0327-S728 | 31i-B Rotary Table Dynamic Fixture Offset |
| A02B-0328-S728 | 32i-B Rotary Table Dynamic Fixture Offset |
| A02B-0353-S728 | 30i-BP Rotary Table Dynamic Fixture Offset |
| A02B-0356-S728 | 31i-B5P Rotary Table Dynamic Fixture Offset |
| A02B-0357-S728 | 31i-BP Rotary Table Dynamic Fixture Offset |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

438

Tool Functions / Tool Compensation

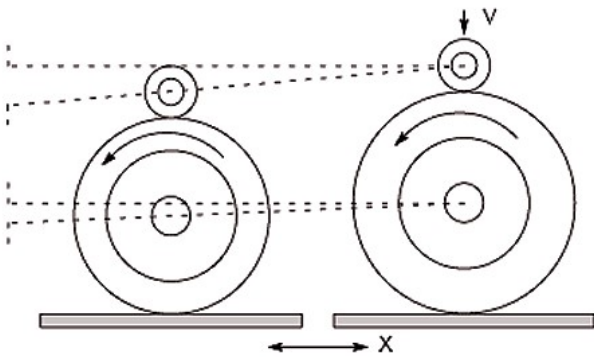

Wheel Wear Compensation

Features

The Wheel Wear Compensation function is used on grinding machines to compensate for wear of the wheel and dresser. The grinding-wheel and dresser are compensated continuously during grinding in the canned cycles for surface grinding (G75, and G77 to G79). They are compensated according to the amount of continuous dressing.

Benefits

- Addition of compensation for grinding wheel
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-J633 | 30i-B Wheel Wear Compensation |
| A02B-0326-J633 | 31i-B5 Wheel Wear Compensation |
| A02B-0327-J633 | 31i-B Wheel Wear Compensation |
| A02B-0328-J633 | 32i-B Wheel Wear Compensation |
| A02B-0353-J633 | 30i-BP Wheel Wear Compensation |
| A02B-0356-J633 | 31i-B5P Wheel Wear Compensation |
| A02B-0357-J633 | 31i-BP Wheel Wear Compensation |
| A02B-0358-J633 | 32i-BP Wheel Wear Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

439

Tool Functions / Tool Compensation

Changing Active Offset Value with Manual Move

Features

When rough machining or semi-finishing need to be performed using a single tool, it is possible to make a fine adjustment of a tool length compensation value or cutter compensation value.

During setup, it is also desirable to make a fine adjustment of a workpiece origin offset once set.

With this function, a travel distance moved on an axis by manual feed is automatically added to the workpiece coordinate system or the currently valid offset number among the specified offset values (tool length compensation value / cutter compensation value / workpiece origin offset) to make a offset value change.

Benefits

- On the fly adjustment of offset during rough machining or semi-finishing
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-S825 | 30i-B Changing Active Offset Value with Manual Move |
| A02B-0326-S825 | 31i-B5 Changing Active Offset Value with Manual Move |
| A02B-0327-S825 | 31i-B Changing Active Offset Value with Manual Move |
| A02B-0328-S825 | 32i-B Changing Active Offset Value with Manual Move |
| A02B-0353-S825 | 30i-BP Changing Active Offset Value with Manual Move |
| A02B-0356-S825 | 31i-B5P Changing Active Offset Value with Manual Move |
| A02B-0357-S825 | 31i-BP Changing Active Offset Value with Manual Move |
| A02B-0358-S825 | 32i-BP Changing Active Offset Value with Manual Move |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

441

Tool Functions / Tool Compensation

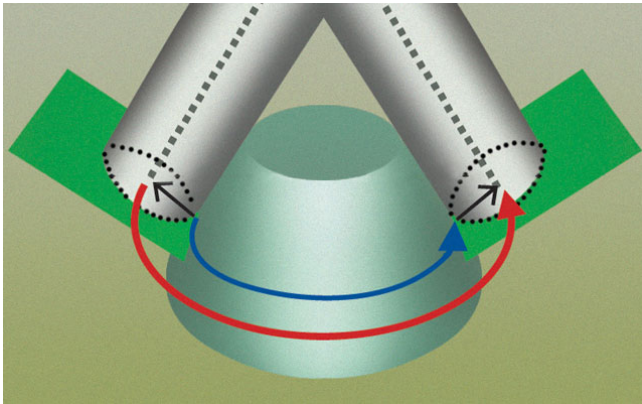

3-Dimensional Cutter Compensation

Features

The 3-Dimensional Cutter Compensation function, formerly called Tool Radius Compensation for 5 Axis Machining, supports part programming of surface coordinates of full 5-Axes complex contours.

It allows the definition of the diameter of the tool at the control level rather than compensating for the tool radius in the part-program.

For machines having multiple rotary axes to freely control the orientation of a tool axis, this function calculates a tool vector from the positions of these rotary axes. This function then calculates a compensation vector in a plane perpendicular to the tool vector and applies three-dimensional cutter offset. This allows for full 5-Axes surface coordinate contouring of complex parts and for any adjustment of the tooling diameter to be maintained at the control level.

Benefits

- Usage of different tool cutter radius for side cutting in 5-axis machining
- Higher machining flexibility
- Machining of complex 5-axis parts (e.g. pyramids and cones)
- Ability to adjust the tool diameter at the control
- Ability to offset part using machine work piece offsets
- Part Programming versus machine programming
- Program is easily transferable to similar machines
- No need to repost programs when tool diameter changes
- Saves on tooling costs. Easily use reground tooling

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-S667 | 30i-B 3-Dimensional Cutter Compensation |
| A02B-0326-S667 | 31i-B5 3-Dimensional Cutter Compensation |
| A02B-0327-S667 | 31i-B 3-Dimensional Cutter Compensation |
| A02B-0328-S667 | 32i-B 3-Dimensional Cutter Compensation |
| A02B-0353-S667 | 30i-BP 3-Dimensional Cutter Compensation |
| A02B-0356-S667 | 31i-B5P 3-Dimensional Cutter Compensation |
| A02B-0357-S667 | 31i-BP 3-Dimensional Cutter Compensation |
| A02B-0358-S667 | 32i-BP 3-Dimensional Cutter Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

442

Tool Functions / Tool Compensation

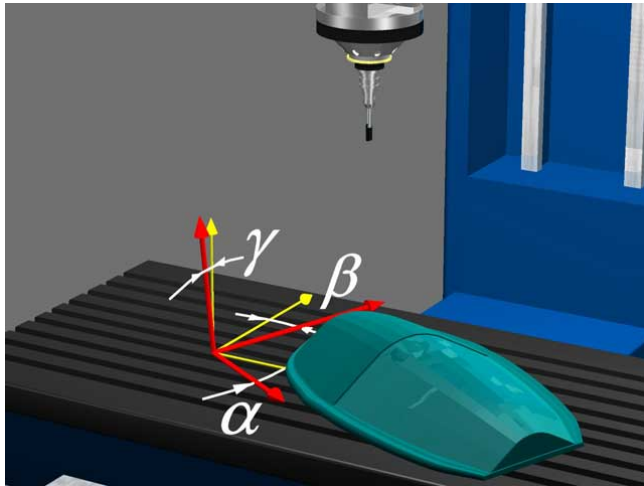

Workpiece Setting Error Compensation

Features

With large workpieces, it is often the case that a workpiece is clamped for the first or second machining stage and is then, perhaps, removed for measurement.

It must then be re-clamped before machining is continued and position errors are unavoidable. The Workpiece Setting Error Compensation feature detects this through measuring cycles that determine the error and automatically corrects prior to initiating the standard part program.

Benefits

- Shortens set-up time
- More efficient production process
- Better quality
- Avoiding potential operators errors

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-S993 | 30i-B Workpiece Setting Error Compensation |
| A02B-0326-S993 | 31i-B5 Workpiece Setting Error Compensation |
| A02B-0327-S993 | 31i-B Workpiece Setting Error Compensation |
| A02B-0328-S993 | 32i-B Workpiece Setting Error Compensation |
| A02B-0353-S993 | 30i-BP Workpiece Setting Error Compensation |
| A02B-0356-S993 | 31i-B5P Workpiece Setting Error Compensation |
| A02B-0357-S993 | 31i-BP Workpiece Setting Error Compensation |
| A02B-0358-S993 | 32i-BP Workpiece Setting Error Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

443

Tool Functions / Tool Compensation

Direct Input of Offset Value Measured B for 2-Spindle Lathe

Features

In lathe with two touch sensors, each tool offset and workpiece origin offset for two workpiece coordinate systems can be automatically calculated. The lathe, which has a back spindle, has a different workpiece coordinate system for each spindle.

Benefits

- For 2 workpiece coordinate system, each tool offset and workpiece origin offset can be automatically calculated

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------|
| A02B-0323-J686 | 30i-B Direct Input of Offset Value Measured B for 2 Spindle Lathe |
| A02B-0326-J686 | 31i-B5 Direct Input of Offset Value Measured B for 2 Spindle Lathe |
| A02B-0327-J686 | 31i-B Direct Input of Offset Value Measured B for 2 Spindle Lathe |
| A02B-0328-J686 | 32i-B Direct Input of Offset Value Measured B for 2 Spindle Lathe |
| A02B-0339-J686 | 0i-TF Direct input of Offset Value Measured B for 2 Spindle Lathe |
| A02B-0349-J686 | 0i-TFP Direct Input of Offset Value Measured B for 2-Spindle-Lathe |
| A02B-0353-J686 | 30i-BP Direct Input of Offset Value Measured B for 2-Spindle Lathe |
| A02B-0356-J686 | 31i-B5P Direct Input of Offset Value Measured B for 2-Spindle Lathe |
| A02B-0357-J686 | 31i-BP Direct Input of Offset Value Measured B for 2-Spindle Lathe |
| A02B-0358-J686 | 32i-BP Direct Input of Offset Value Measured B for 2-Spindle Lathe |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

444

Tool Functions / Tool Compensation

Tool Life Management

Features

When the usage of a tool exceeds the preset hours or times of use, another tool of the same group which has not yet exceeded the preset lifetime is selected.

This function is a basic function in FANUC Series 0i-MF/TF and 0i-F Plus.

Benefits

- Improvement of the tool group management
- Optimization of the machine and tool usage
- Automatic alarm generated
- Automation for mass production

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J935 | 30i-B Tool Life Management |
| A02B-0326-J935 | 31i-B5 Tool Life Management |
| A02B-0327-J935 | 31i-B Tool Life Management |
| A02B-0328-J935 | 32i-B Tool Life Management |
| A02B-0353-J935 | 30i-BP Tool Life Management |
| A02B-0356-J935 | 31i-B5P Tool Life Management |
| A02B-0357-J935 | 31i-BP Tool Life Management |
| A02B-0358-J935 | 32i-BP Tool Life Management |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

445

Tool Functions / Tool Compensation

Addition of Tool Pairs for Tool Life Management

Features

This option expands the total number of tool life management groups from 256 groups (standard) to 1024 groups.

Benefits

- Increase the number of available tool groups

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------|
| A02B-0323-J936 | 30i-B Tool Life Management - Addition of Tool Pairs |
| A02B-0326-J936 | 31i-B5 Tool Life Management - Addition of Tool Pairs |
| A02B-0327-J936 | 31i-B Tool Life Management - Addition of Tool Pairs |
| A02B-0328-J936 | 32i-B Tool Life Management - Addition of Tool Pairs |
| A02B-0353-J936 | 30i-BP Addition of Tool Pairs for Tool Life Management |
| A02B-0356-J936 | 31i-B5P Addition of Tool Pairs for Tool Life Management |
| A02B-0357-J936 | 31i-BP Addition of Tool Pairs for Tool Life Management |
| A02B-0358-J936 | 32i-BP Addition of Tool Pairs for Tool Life Management |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

446

Tool Functions / Tool Compensation

Spindle Unit Compensation

Features

For a machine with multiple spindle units, the characteristic parameters, compensation amounts etc. can be set for each unit respectively. By compensating a selected unit during machining, it is possible to create programs that are not influenced by spindle unit compensation amounts.

If a spindle unit is controlled as a rotational axis, the compensation amount is calculated from the rotation angle automatically.

Benefits

- Simplifies programming

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-R620 | 30i-B Spindle Unit Compensation |
| A02B-0326-R620 | 31i-B5 Spindle Unit Compensation |
| A02B-0327-R620 | 31i-B Spindle Unit Compensation |
| A02B-0353-R620 | 30i-BP Spindle Unit Compensation |
| A02B-0356-R620 | 31i-B5P Spindle Unit Compensation |
| A02B-0357-R620 | 31i-BP Spindle Unit Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

447

Tool Functions / Tool Compensation

Nutating Rotary Head Tool Length Compensation

Features

For a machine with multiple spindle units, the characteristic parameters, tool axis directions etc. can be set for each unit respectively. By compensating a selected unit during machining, it is possible to create programs that are not influenced by tool length compensation amounts.

If a spindle unit is controlled as a rotational axis, the compensation amount is calculated from the rotation angle automatically.

Benefits

- Simplifies programming

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R628 | 30i-B Nutating Rotary Head Tool Length Compensation |
| A02B-0326-R628 | 31i-B5 Nutating Rotary Head Tool Length Compensation |
| A02B-0327-R628 | 31i-B Nutating Rotary Head Tool Length Compensation |
| A02B-0353-R628 | 30i-BP Nutating Rotary Head Tool Length Compensation |
| A02B-0356-R628 | 31i-B5P Nutating Rotary Head Tool Length Compensation |
| A02B-0357-R628 | 31i-BP Nutating Rotary Head Tool Length Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

448

Tool Functions / Tool Compensation

Automatic Alteration of Tool Position Compensation

Features

The Automatic Alteration of Tool Position Compensation function is used to select a new tool number by an external signal from the PMC in manual operation mode.

When a tool is changed manually, the tool offset value (Tool geometry/wear compensation) can be adjusted to the selected tool by specifying the new tool number with an external signal through the PMC.

Benefits

- Increase of the manual tool management capabilities
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-J690 | 30i-B Automatic Alteration of Tool Position Compensation |
| A02B-0326-J690 | 31i-B5 Automatic Alteration of Tool Position Compensation |
| A02B-0327-J690 | 31i-B Automatic Alteration of Tool Position Compensation |
| A02B-0328-J690 | 32i-B Automatic Alteration of Tool Position Compensation |
| A02B-0339-J690 | 0i-TF Automatic Alteration of Tool Position Compensation |
| A02B-0349-J690 | 0i-TFP Automatic Alteration of Tool Position Compensation |
| A02B-0353-J690 | 30i-BP Automatic Alteration of Tool Position Compensation |
| A02B-0356-J690 | 31i-B5P Automatic Alteration of Tool Position Compensation |
| A02B-0357-J690 | 31i-BP Automatic Alteration of Tool Position Compensation |
| A02B-0358-J690 | 32i-BP Automatic Alteration of Tool Position Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

449

Tool Functions / Tool Compensation

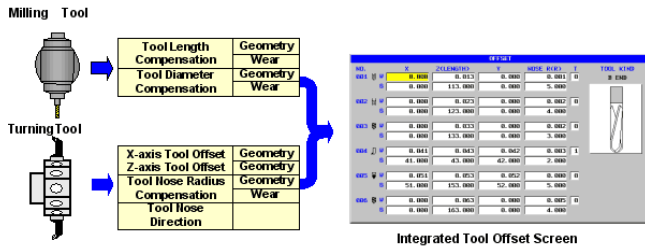

Tool Offset for Milling and Turning Function

Features

The Tool Offset Screen for Compound Machine function has been designed to meet the requirements of compound machine tools to manage both offset data of milling and turning tools on one offset screen, which simplifies the tool offset data management of compound machines.

Features:

- Manages and displays offset data of both milling and turning tools on an Integrated Tool Offset Screen
- Manages and displays geometry and wear compensation data on an Integrated Tool Offset Screen
- Displays tool shape in graphic for easy operation. Designates tool shape on the dedicated screen

Limitation

The following functions cannot be used with this function:

- Tool position offset (G45~G48)
- Tool position offset B
- Changing Active Offset Value with Manual Move
- Basic operation package 2
- Manual Guide i
- Tool offset data cannot be protected by '8-level data protection function'

Benefits

- Addition of tool management capabilities for compound machines
- Simplification of the setup and tool management
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-R595 | 30i-B Tool Offset for Milling and Turning Function |
| A02B-0326-R595 | 31i-B5 Tool Offset for Milling and Turning Function |
| A02B-0327-R595 | 31i-B Tool Offset for Milling and Turning Function |
| A02B-0328-R595 | 32i-B Tool Offset for Milling and Turning Function |
| A02B-0339-R595 | 0i-TF Tool Offset for Milling and Turning Function |
| A02B-0349-R595 | 0i-TFP Tool Offset for Milling and Turning Function |
| A02B-0353-R595 | 30i-BP Tool Offset for Milling and Turning Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

450

| Specification | Description |
|----------------|------------------------------------------------------|
| A02B-0356-R595 | 31i-B5P Tool Offset for Milling and Turning Function |
| A02B-0357-R595 | 31i-BP Tool Offset for Milling and Turning Function |
| A02B-0358-R595 | 32i-BP Tool Offset for Milling and Turning Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

452

Tool Functions / Tool Compensation

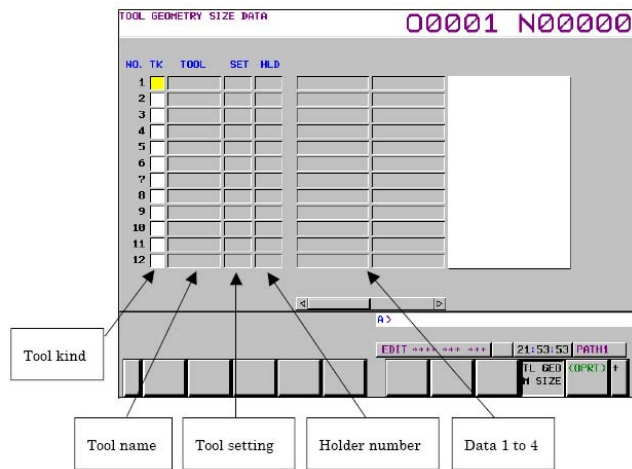

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Tool Geometry Size Data

Features

The tool geometry size data can be set through a special input screen (Tool geometry size data setting screen) under the tool management screen.

The tool geometry size data stores tool data like shape and size etc. to be used in the 3D interference check function and dynamic graphic display function. It also applies to the simulation functionality of MANUAL GUIDE i.

Benefits

- Addition of capabilities for the Tool Management function
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-R589 | 30i-B Tool Geometry Size Data, 100 Pairs |
| A02B-0323-R590 | 30i-B Tool Geometry Size Data, 300 Pairs |
| A02B-0326-R362 | 31i-B5 Tool Geometry Size Data, 1000 Pairs |
| A02B-0326-R589 | 31i-B5 Tool Geometry Size Data, 100 Pairs |
| A02B-0326-R590 | 31i-B5 Tool Geometry Size Data, 300 Pairs |
| A02B-0327-R362 | 31i-B Tool Geometry Size Data, 1000 Pairs |
| A02B-0327-R589 | 31i-B Tool Geometry Size Data, 100 Pairs |
| A02B-0327-R590 | 31i-B Tool Geometry Size Data, 300 Pairs |
| A02B-0328-R362 | 32i-B Tool Geometry Size Data, 1000 Pairs |
| A02B-0328-R589 | 32i-B Tool Geometry Size Data, 100 Pairs |
| A02B-0328-R590 | 32i-B Tool Geometry Size Data, 300 Pairs |
| A02B-0339-R589 | 0i-TF Tool Geometry Size Data: 100 Pairs |
| A02B-0339-R590 | 0i-TF Tool Geometry Size Data, 300 Pairs |
| A02B-0340-R589 | 0i-MF Tool Geometry Size Data: 100 PAIRS |
| A02B-0340-R590 | 0i-MF Tool Geometry Size Data, 300 Pairs |
| A02B-0349-R589 | 0i-TFP Tool Geometry Size Data: 100 Pairs |
| A02B-0349-R590 | 0i-TFP Tool Geometry Size Data: 300 Pairs |
| A02B-0350-R589 | 0i-MFP Tool Geometry Size Data: 100 Pairs |
| A02B-0350-R590 | 0i-MFP Tool Geometry Size Data: 300 Pairs |
| A02B-0353-R589 | 30i-BP Tool Geometry Size Data - 100 Pairs |

453

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0353-R590 | 30i-BP Tool Geometry Size Data - 300 Pairs |
| A02B-0356-R589 | 31i-B5P Tool Geometry Size Data - 100 Pairs |
| A02B-0356-R590 | 31i-B5P Tool Geometry Size Data - 300 Pairs |
| A02B-0357-R589 | 31i-BP Tool Geometry Size Data - 100 Pairs |
| A02B-0357-R590 | 31i-BP Tool Geometry Size Data - 300 Pairs |
| A02B-0358-R589 | 32i-BP Tool Geometry Size Data - 100 Pairs |
| A02B-0358-R590 | 32i-BP Tool Geometry Size Data - 300 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

454

Tool Functions / Tool Compensation

The screenshot shows the 'TOOL MANAGER' screen with the ID '00123 N00000'. The main table lists tool parameters for 12 tools. The first four tools have specific data, while the remaining eight are zeroed out.

| NO. | TYPE NO. | MG | POT | TK | TOOL | SET | HLD | CUT AN | NDS AN |
|-----|----------|----|-----|----|---------|-----|-----|---------|--------|
| 1 | 1111 | 1 | 1 | 1 | GENERAL | 8 | 1 | 100.000 | 60.000 |
| 2 | 2222 | 1 | 6 | 0 | THREAD | 6 | 1 | 40.000 | 26.000 |
| 3 | 3333 | 1 | 3 | 0 | GROVE | 4 | 2 | 32.500 | 67.000 |
| 4 | 4444 | 1 | 16 | 0 | BUTTON | 12 | 2 | 35.000 | |
| 5 | 0 | 0 | 0 | 0 | | | | | |
| 6 | 0 | 0 | 0 | 0 | | | | | |
| 7 | 0 | 0 | 0 | 0 | | | | | |
| 8 | 0 | 0 | 0 | 0 | | | | | |
| 9 | 0 | 0 | 0 | 0 | | | | | |
| 10 | 0 | 0 | 0 | 0 | | | | | |
| 11 | 0 | 0 | 0 | 0 | | | | | |
| 12 | 0 | 0 | 0 | 0 | | | | | |

At the bottom, there are status indicators: 'MEH *****', '13:43:18', 'PATH2', and a control panel with buttons for 'MAGAZINE', 'TOOL', 'EACH TOOL', 'TOTAL LIFE', and 'COPY'.

Tool Geometry Size Data - Additional Tool Type

Features

This function supports to use the tool kind for the lathe system even if it is used in the machining center type path.

As a result, when the compound machining is executed in the machining center type path, the tool geometry size data can be used for it.

Benefits

- Simplifies the management of tools for compound machines

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-R685 | 30i-B Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0326-R685 | 31i-B5 Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0327-R685 | 31i-B Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0328-R685 | 32i-B Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0339-R685 | 0i-TF Addition of Tool Geometry Size Data |
| A02B-0340-R685 | 0i-MF Addition of Tool Geometry Size Data |
| A02B-0353-R685 | 30i-BP Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0356-R685 | 31i-B5P Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0357-R685 | 31i-BP Addition of Tool Kind in Tool Geometry Size Data |
| A02B-0358-R685 | 32i-BP Addition of Tool Kind in Tool Geometry Size Data |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

455

Tool Functions / Tool Compensation

Tool Management Function

Features

The Tool Management Functions provide a framework and tables to manage machine tooling data. Various expansion functions improve the flexibility for machine-specific tool management customization, facilitate the management of special tools, and simplify loading of tools.

The following functions are presented on the following pages:

- Tool Pairs for Tool Management Function
- Tool Attachment/Detachment Management Function
- Tool Management Expansion
- Tool Management Expansion B
- Tool Management Function for Multi-Edge Tools
- Tool Management Function for Oversize Tools

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

456

Tool Management Function

Tool Pairs for Tool Management Function

Features

This function provides a framework and tables to manage machine tooling data. The tooling data table can be accessed through the PMC Window functions, C-Language Executor or via FOCAS / HSSB to a Panel i. When using this function, it is not necessary to develop an own machine-specific tool management HMI screens using C-Language Executor, Macro Executor, or PC-based high-level languages.

Data in the Tool Management table can be accessed by machine-specific tool change macros, read / write access through the main part program (G10 commands) and via manual data entry by the machine operator.

The Tool Management function is available in 3 different sizes:

- Tool Management Function - 64 pairs
- Tool Management Function - 240 pairs
- Tool Management Function - 1000 pairs.

Benefits

- Custom tooling data HMI without using high level programming languages
- Management of tool life
- Sister tooling management (tool-type groups)
- Random or fixed tool-storage location.
- Customizable tool data management for Balluff ID, adaptive control, etc.

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-S830 | 30i-B Tool Management Function - 64 Tool Pairs |
| A02B-0323-S831 | 30i-B Tool Management Function - 240 Tool Pairs |
| A02B-0323-S833 | 30i-B Tool Management Function - 1000 Tool Pairs |
| A02B-0326-S830 | 31i-B5 Tool Management Function - 64 Tools Pairs |
| A02B-0326-S831 | 31i-B5 Tool Management Function - 240 Tool Pairs |
| A02B-0326-S833 | 31i-B5 Tool Management Function - 1000 Tool Pairs |
| A02B-0327-S830 | 31i-B Tool Management Function - 64 Tool Pairs |
| A02B-0327-S831 | 31i-B Tool Management Function - 240 Tool Pairs |
| A02B-0327-S833 | 31i-B Tool Management Function - 1000 Tool Pairs |
| A02B-0328-S830 | 32i-B Tool Management Function - 64 Tool Pairs |
| A02B-0328-S831 | 32i-B Tool Management Function - 240 Tool Pairs |
| A02B-0328-S833 | 32i-B Tool Management Function - 1000 Tool Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0339-S830 | 0i-TF Tool Management Function: 64 Pairs |
| A02B-0339-S831 | 0i-TF Tool Management Function: 240 Pairs |
| A02B-0339-S833 | 0i-TF Tool Management Function: 1000 Pairs |
| A02B-0340-S830 | 0i-MF Tool Management Function: 64 Pairs |
| A02B-0340-S831 | 0i-MF Tool Management Function: 240 Pairs |
| A02B-0340-S833 | 0i-MF Tool Management Function: 1000 Pairs |
| A02B-0349-S830 | 0i-TFP Tool Pairs for Tool Management Function: 64 Pairs |
| A02B-0349-S831 | 0i-TFP Tool Pairs for Tool Management Function: 240 Pairs |
| A02B-0349-S833 | 0i-TFP Tool Pairs for Tool Management Function: 1000 Pairs |
| A02B-0350-S830 | 0i-MFP Tool Pairs for Tool Management Function: 64 Pairs |
| A02B-0350-S831 | 0i-MFP Tool Pairs for Tool Management Function: 240 Pairs |
| A02B-0350-S833 | 0i-MFP Tool Pairs for Tool Management Function: 1000 Pairs |
| A02B-0353-S830 | 30i-BP Tool Pairs for Tool Management Function - 64 Pairs |
| A02B-0353-S831 | 30i-BP Tool Pairs for Tool Management Function - 240 Pairs |
| A02B-0353-S833 | 30i-BP Tool Pairs for Tool Management Function - 1000 Pairs |
| A02B-0356-S830 | 31i-B5P Tool Pairs for Tool Management Function - 64 Pairs |
| A02B-0356-S831 | 31i-B5P Tool Pairs for Tool Management Function - 240 Pairs |
| A02B-0356-S833 | 31i-B5P Tool Pairs for Tool Management Function - 1000 Pairs |
| A02B-0357-S830 | 31i-BP Tool Pairs for Tool Management Function - 64 Pairs |
| A02B-0357-S831 | 31i-BP Tool Pairs for Tool Management Function - 240 Pairs |
| A02B-0357-S833 | 31i-BP Tool Pairs for Tool Management Function - 1000 Pairs |
| A02B-0358-S830 | 32i-BP Tool Pairs for Tool Management Function - 64 Pairs |
| A02B-0358-S831 | 32i-BP Tool Pairs for Tool Management Function - 240 Pairs |
| A02B-0358-S833 | 32i-BP Tool Pairs for Tool Management Function - 1000 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

458

Tool Management Function

Tool Attachment/Detachment Management Function

Features

The Tool Attachment / Detachment Management function enables the machine operator to load a tool and enter tool management data, all in one operation.

The tool will be registered to the empty magazine pocket selected, and the keyed-in Tool Data will be automatically entered into the Tool Management Data Table. Tool Attachment / Detachment is used in conjunction with the basic Tool Management Function and one of the optional Tool Management Function Pair features must also be activated.

Basic operation of the Tool Management Function requires that the Tool Type and Tool Data be defined in the Tool Management Table first before the tool can be assigned to the machine's spindle or tool magazine pocket. This is not always convenient for tool loading operations. Tool Attachment / Detachment allows the Machine Tool Builder / System Integrator to develop improved Tool Loading and Unloading procedures for enhanced end-user operation.

Benefits

- Register / Delete a tool to / from the Magazine Management and Tool Management Tables simultaneously in one operation
- Automatic Attachment / Detachment operation enables the creation of Load / Unload cycles for automatic handling of tool to and from the magazine pocket

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------|
| A02B-0323-S997 | 30i-B Tool Management Function - Tool Attach / Detach Function |
| A02B-0326-S997 | 31i-B5 Tool Management Function - Tool Attach / Detach Function |
| A02B-0327-S997 | 31i-B Tool Management Function - Tool Attach / Detach Function |
| A02B-0328-S997 | 32i-B Tool Management Function - Tool Attach / Detach Function |
| A02B-0339-S997 | 0i-TF Tool Attachment / Detachment Management Function |
| A02B-0340-S997 | 0i-MF Tool Attachment / Detachment Management Function |
| A02B-0349-S997 | 0i-TFP Tool Attachment / Detachment Management Function |
| A02B-0350-S997 | 0i-MFP Tool Attachment / Detachment Management Function |
| A02B-0353-S997 | 30i-BP Tool Attach / Detach Management Function |
| A02B-0356-S997 | 31i-B5P Tool Attach / Detach Management Function |
| A02B-0357-S997 | 31i-BP Tool Attach / Detach Management Function |
| A02B-0358-S997 | 32i-BP Tool Attach / Detach Management Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

459

Tool Management Function

Tool Management Expansion

Features

The Tool Management Expansion function provides the following enhancements to the Tool Management Function:

- Customization of a tool management data item display
- Setting of the name of the spindle position and the wait position
- Setting of the customizing data with a decimal point
- Protection of a various tool management data by the key signal
- Selecting of the life counting cycle of tool life value
- Individual / each tool data screen
- Total life time display for tools of the same type¹⁾
- Output to external device²⁾

1) Series 30i, 31i, 32i CNC only

2) Standard on Series 30i/31i/32i CNC

Benefits

- Greater flexibility for machine-specific Tool Management customization
- Enhanced tool data presentation

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-S852 | 30i-B Tool Management Function - Tool Management Expansion |
| A02B-0326-S852 | 31i-B5 Tool Management Function - Tool Management Expansion |
| A02B-0327-S852 | 31i-B Tool Management Function - Tool Management Expansion |
| A02B-0328-S852 | 32i-B Tool Management Function - Tool Management Expansion |
| A02B-0339-S852 | 0i-TF Tool Management Expansion |
| A02B-0340-S852 | 0i-MF Tool Management Expansion |
| A02B-0349-S852 | 0i-TFP Tool Management Expansion |
| A02B-0350-S852 | 0i-MFP Tool Management Expansion |
| A02B-0353-S852 | 30i-BP Tool Management Expansion |
| A02B-0356-S852 | 31i-B5P Tool Management Expansion |
| A02B-0357-S852 | 31i-BP Tool Management Expansion |
| A02B-0358-S852 | 32i-BP Tool Management Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

460

Tool Management Function

Tool Management Expansion B

Features

The Tool Management Expansion B function provides the following enhancements to the Tool Management Function:

- Cartridge management data protection function
- Tool management data extraction function
- Tool management function magazine property / pot property
- Tool return function

Benefits

- Increase of the flexibility to manage custom Tool Management systems

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------|
| A02B-0323-R616 | 30i-B Tool Management Function - Tool Management Expansion B |
| A02B-0326-R616 | 31i-B5 Tool Management Function - Tool Management Expansion B |
| A02B-0327-R616 | 31i-B Tool Management Function - Tool Management Expansion B |
| A02B-0328-R616 | 32i-B Tool Management Function - Tool Management Expansion B |
| A02B-0339-R616 | 0i-TF Tool Management Expansion B |
| A02B-0340-R616 | 0i-MF Tool Management Expansion B |
| A02B-0349-R616 | 0i-TFP Tool Management Expansion B |
| A02B-0350-R616 | 0i-MFP Tool Management Expansion B |
| A02B-0353-R616 | 30i-BP Tool Management Expansion B |
| A02B-0356-R616 | 31i-B5P Tool Management Expansion B |
| A02B-0357-R616 | 31i-BP Tool Management Expansion B |
| A02B-0358-R616 | 32i-BP Tool Management Expansion B |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

461

Tool Management Function

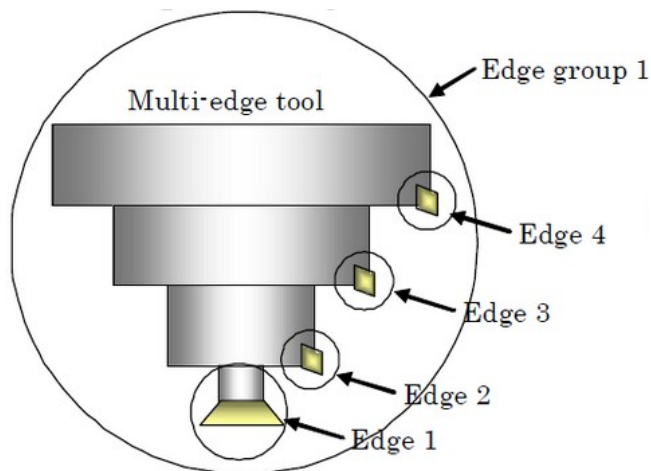

Tool Management Function for Multi-Edge Tools

Features

When using the Tool Management Function for Multi-Edge Tools to machine parts with a multi-edge tools (tools which has more than one edge), the tool life management is carried out for individual edges separately.

Unlike the conventional tool management function, which assigns an individual tool management data item to each tool, the multi-edge tool management function assigns an individual tool management data item to each edge.

Benefits

- Simplifies the management of multi-edge tools on complex machining centers
- Increase of the flexibility of the tool changer
- Simplification of the programming of the tool changer handling

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R681 | 30i-B Tool Management Function - Multi-Edge Tools |
| A02B-0326-R681 | 31i-B5 Tool Management Function - Multi-Edge Tools |
| A02B-0327-R681 | 31i-B Tool Management Function - Multi-Edge Tools |
| A02B-0328-R681 | 32i-B Tool Management Function - Multi-Edge Tools |
| A02B-0339-R681 | 0i-TF Tool Management Function for Multi-Edge Tools |
| A02B-0340-R681 | 0i-MF Tool Management Function for Multi-Edge Tools |
| A02B-0349-R681 | 0i-TFP Tool Management Function for Multi-Edge Tools |
| A02B-0350-R681 | 0i-MFP Tool Management Function for Multi-Edge Tools |
| A02B-0353-R681 | 30i-BP Tool Management Function for Multi-Edge Tools |
| A02B-0356-R681 | 31i-B5P Tool Management Function for Multi-Edge Tools |
| A02B-0357-R681 | 31i-BP Tool Management Function for Multi-Edge Tools |
| A02B-0358-R681 | 32i-BP Tool Management Function for Multi-Edge Tools |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

462

Functions

Accuracy Compensation Functions

Machine Compensation Functions are options that allow the CNC to compensate for mechanical inaccuracies in the machine.

Some of the functions detailed in the catalog:

- Backlash Compensation
- Pitch Error Compensation
- Inclination Compensation
- Straightness Compensation
- 3-Dimensional Error Compensation
- 3-Dimensional Machine Compensation
- AI Thermal Displacement Compensation
- etc.


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

463

Accuracy Compensation Functions

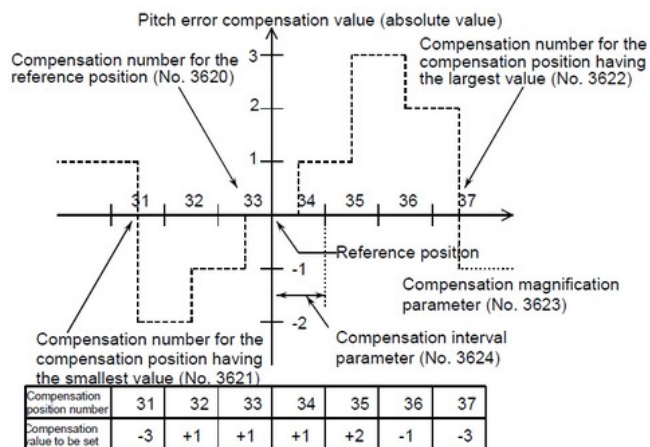

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Stored Pitch Error Compensation

Features

The Pitch Error Compensation function is used to compensate for error in the ball screw. A total number of compensation points for the system are arbitrarily divided among the axes. The compensation amount, in detection units, is subject to a multiplier.

The pitch error compensation pulse at each pitch error compensation point is output in the interval between that point and the next compensation point, as shown in the figure.

Benefits


- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-J841 | 30i-B Stored Pitch Error Compensation |
| A02B-0326-J841 | 31i-B5 Stored Pitch Error Compensation |
| A02B-0327-J841 | 31i-B Stored Pitch Error Compensation |
| A02B-0328-J841 | 32i-B Stored Pitch Error Compensation |
| A02B-0339-J841 | 0i-TF Stored Pitch Error Compensation |
| A02B-0340-J841 | 0i-MF Stored Pitch Error Compensation |
| A02B-0349-J841 | 0i-TFP Stored Pitch Error Compensation |
| A02B-0350-J841 | 0i-MFP Stored Pitch Error Compensation |
| A02B-0353-J841 | 30i-BP Stored Pitch Error Compensation |
| A02B-0356-J841 | 31i-B5P Stored Pitch Error Compensation |
| A02B-0357-J841 | 31i-BP Stored Pitch Error Compensation |
| A02B-0358-J841 | 32i-BP Stored Pitch Error Compensation |

464

Accuracy Compensation Functions

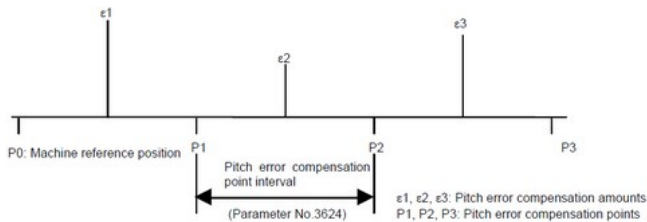

Interpolation Type Pitch Error Compensation

Features

The Interpolation Type Pitch Error Compensation function outputs divided compensation pulses between compensation points in such a way that a smoother pitch error compensation can be realized.

The compensation amount at each error compensation point is divided into pulses in the interval between that point and the next point on the travel axis and output, as shown in the figure.

The Stored Pitch Error Compensation function is required to be able to use this function, and can be used with Bi-Directional Pitch Error Compensation.

Benefits

- Increase of the precision of the compensation
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-R333 | 30i-B Interpolation Type Pitch Error Compensation (STEP 2) |
| A02B-0326-R333 | 31i-B5 Interpolation Type Pitch Error Compensation (STEP 2) |
| A02B-0327-R333 | 31i-B Interpolation Type Pitch Error Compensation (STEP 2) |
| A02B-0328-R333 | 32i-B Interpolation Type Pitch Error Compensation (STEP 2) |
| A02B-0339-R333 | 0i-TF Interpolation Type Pitch Error Compensation (STEP 2) |
| A02B-0340-R333 | 0i-MF Interpolation Type Pitch Error Compensation (STEP 2) |
| A02B-0349-R333 | 0i-TFP Interpolation Type Pitch Error Compensation |
| A02B-0350-R333 | 0i-MFP Interpolation Type Pitch Error Compensation |
| A02B-0353-R333 | 30i-BP Interpolation Type Pitch Error Compensation |
| A02B-0356-R333 | 31i-B5P Interpolation Type Pitch Error Compensation |
| A02B-0357-R333 | 31i-BP Interpolation Type Pitch Error Compensation |
| A02B-0358-R333 | 32i-BP Interpolation Type Pitch Error Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

465

Accuracy Compensation Functions

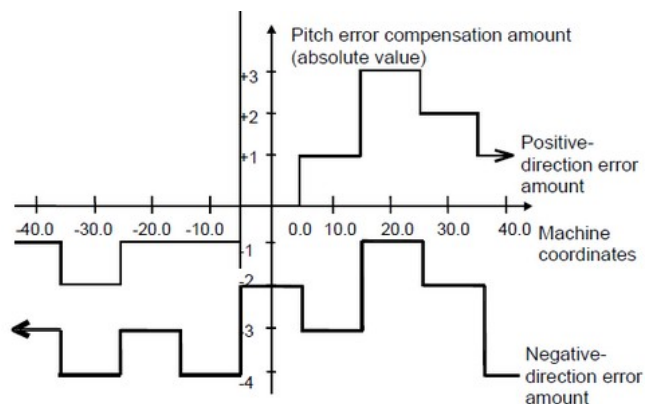

Bi-Directional Pitch Error Compensation

Features

The Bi-Directional Pitch Error Compensation function allows different pitch error compensation amounts to be set for travel in the positive direction and in the negative direction, so that pitch error compensation can be performed differently in the two directions.

The Stored Pitch Error Compensation function, as a comparison, does not distinguish between the directions of travel.

In addition, when the direction of travel is reversed, the compensation amount is automatically calculated from the pitch error compensation data to perform compensation in the same way as in backlash compensation. This reduces the difference between the paths in the positive and negative directions.

The total number of compensation points is 2048. It requires the option Stored Pitch Error Compensation.

Benefits

- Compensation of the errors in 2 different directions
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-S656 | 30i-B Bi-Directional Pitch Error Compensation |
| A02B-0326-S656 | 31i-B5 Bi-Directional Pitch Error Compensation |
| A02B-0327-S656 | 31i-B Bi-Directional Pitch Error Compensation |
| A02B-0328-S656 | 32i-B Bi-Directional Pitch Error Compensation |
| A02B-0339-S656 | 0i-TF Bi-Directional Pitch Error Compensation |
| A02B-0340-S656 | 0i-MF Bi-Directional Pitch Error Compensation |
| A02B-0349-S656 | 0i-TFP Bi-Directional Pitch Error Compensation |
| A02B-0350-S656 | 0i-MFP Bi-Directional Pitch Error Compensation |
| A02B-0353-S656 | 30i-BP Bi-Directional Pitch Error Compensation |
| A02B-0356-S656 | 31i-B5P Bi-Directional Pitch Error Compensation |
| A02B-0357-S656 | 31i-BP Bi-Directional Pitch Error Compensation |
| A02B-0358-S656 | 32i-BP Bi-Directional Pitch Error Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

466

Accuracy Compensation Functions

Extended Bi-Directional Pitch Error Compensation

Features

The Extended Bi-Directional Pitch Error Compensation function provides the same functionality as the Bi-Directional Pitch Error Compensation function, but increases the number of compensation points from 2048 to 5120.

It requires both Stored Pitch Error Compensation and Bi-Directional Pitch Error Compensation function activated in the CNC.

Benefits

- Increase the precision of the compensation in 2 different directions
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------|
| A02B-0323-S657 | 30i-B Extended Bi-Directional Pitch Error Compensation |
| A02B-0326-S657 | 31i-B5 Extended Bi-Directional Pitch Error Compensation |
| A02B-0327-S657 | 31i-B Extended Bi-Directional Pitch Error Compensation |
| A02B-0328-S657 | 32i-B Extended Bi-Directional Pitch Error Compensation |
| A02B-0339-S657 | 0i-TF Extended Bi-Directional Pitch Error Compensation |
| A02B-0340-S657 | 0i-MF Extended Bi-Directional Pitch Error Compensation |
| A02B-0349-S657 | 0i-TFP Extended Bi-Directional Pitch Error Compensation |
| A02B-0350-S657 | 0i-MFP Extended Bi-Directional Pitch Error Compensation |
| A02B-0353-S657 | 30i-BP Extended Bi-Directional Pitch Error Compensation |
| A02B-0356-S657 | 31i-B5P Extended Bi-Directional Pitch Error Compensation |
| A02B-0357-S657 | 31i-BP Extended Bi-Directional Pitch Error Compensation |
| A02B-0358-S657 | 32i-BP Extended Bi-Directional Pitch Error Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

467

Accuracy Compensation Functions

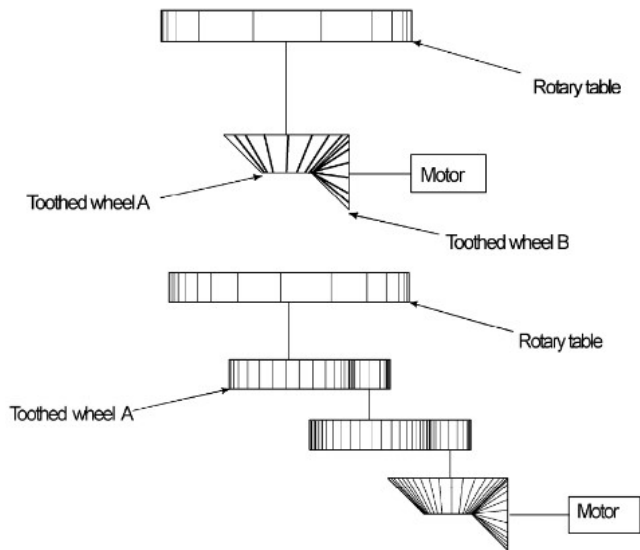

Periodical Secondary Pitch Error Compensation


Features

The Periodical Secondary Pitch Error Compensation is used when there is a gear between the motor and shaft of the axis of travel.

To compensate for pitch errors, the compensation for the pitch error due to the rotation of the gear is superimposed on the compensation for the pitch error per rotation of the rotary table. If the gear between the rotary table and the servo motor is of a single stage, as shown below, the stored pitch error compensation is used for the compensation for the pitch error of the toothed wheel A and Periodical Secondary Pitch Error compensation is used for the pitch error of the toothed wheel B.

If there is a multiple-stage gear, as shown below, the stored pitch error compensation is used for toothed wheel A and Periodical Secondary Pitch Error compensation is used for the cyclic pitch error that occurs in each pitch error compensation interval of toothed wheel A.

Although a rotary table is used as an example here, Periodical Secondary Pitch Error compensation can be used in the same way when the machine is moved along a linear axis using a gear. For example, in a configuration such as that shown below, stored pitch error compensation is used for the compensation for the pitch error of the drilling hole and Periodical Secondary Pitch Error compensation is used for the compensation for the pitch error of toothed wheel A.

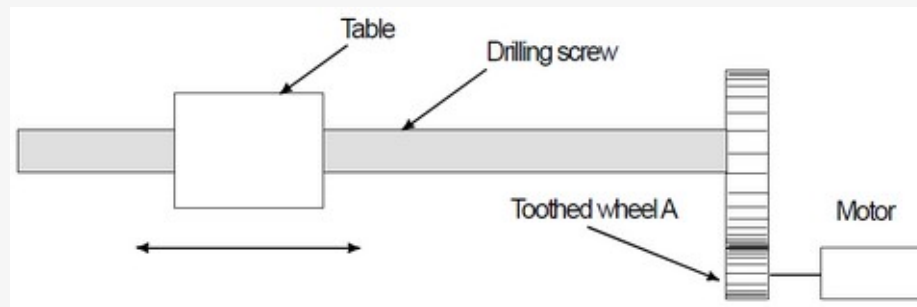

Benefits

- Increase of the precision in geared systems such as rotation tables
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

468

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-S634 | 30i-B Periodical Secondary Pitch Error Compensation |
| A02B-0326-S634 | 31i-B5 Periodical Secondary Pitch Error Compensation |
| A02B-0327-S634 | 31i-B Periodical Secondary Pitch Error Compensation |
| A02B-0328-S634 | 32i-B Periodical Secondary Pitch Error Compensation |
| A02B-0353-S634 | 30i-BP Periodical Secondary Pitch Error Compensation |
| A02B-0356-S634 | 31i-B5P Periodical Secondary Pitch Error Compensation |
| A02B-0357-S634 | 31i-BP Periodical Secondary Pitch Error Compensation |
| A02B-0358-S634 | 32i-BP Periodical Secondary Pitch Error Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

469

Accuracy Compensation Functions

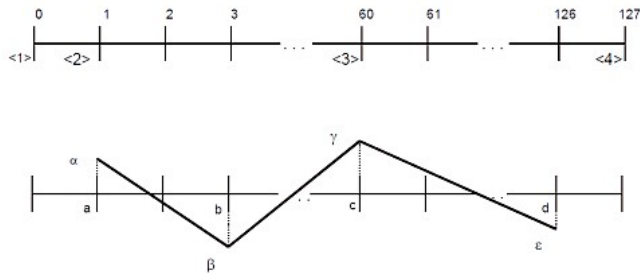

Inclination Compensation

Features

The Inclination Compensation function, also called "Gradient Compensation", may be super-imposed on the stored pitch error compensation to reduce the number of points that must be entered for stored pitch error compensation.

Three approximate straight lines are formed with four parameter specified compensation points and compensation amounts related to the respective compensation points.

Inclination compensation is carried out along these approximate straight lines at pitch error compensation intervals. The inclination compensation amount is added to the pitch error compensation amount.

To perform inclination compensation, the Stored Pitch Error Compensation must be set for the axis subject to compensation. Unlike the Stored Pitch Error Compensation function, whose amount is set up for an individual compensation point, an amount of inclination compensation is calculated for individual compensation points by setting up four typical points and compensation amounts for them.

This function can be used to reduce the number of stored pitch error compensation points that must be entered for long ball screws.

Benefits

- Increase of the precision of systems with long ball screws and large machiens
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J981 | 30i-B Inclination Compensation |
| A02B-0326-J981 | 31i-B5 Inclination Compensation |
| A02B-0327-J981 | 31i-B Inclination Compensation |
| A02B-0328-J981 | 32i-B Inclination Compensation |
| A02B-0333-J981 | 35i-B Inclination Compensation |
| A02B-0339-J981 | 0i-TF Inclination Compensation |
| A02B-0340-J981 | 0i-MF Inclination Compensation |
| A02B-0349-J981 | 0i-TFP Inclination Compensation |
| A02B-0350-J981 | 0i-MFP Inclination Compensation |
| A02B-0353-J981 | 30i-BP Inclination Compensation |
| A02B-0356-J981 | 31i-B5P Inclination Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

470

| Specification | Description |
|----------------|---------------------------------|
| A02B-0357-J981 | 31i-BP Inclination Compensation |
| A02B-0358-J981 | 32i-BP Inclination Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

471

Accuracy Compensation Functions

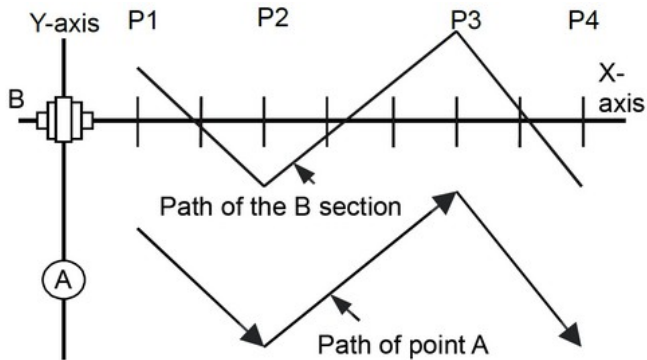

Straightness Compensation

Features

The Straightness Compensation function is used to compensate the alignment of two perpendicular axes.

In straightness compensation, similarly to Inclination compensation, four typical pitch error compensation points (a, b, c, and d) are selected from pitch error compensation points and specified as straightness compensation points, and compensation amounts are set up only for these four points.

For pitch error compensation points between straightness compensation points, the CNC calculates and outputs amounts that match straightness compensation. Straightness compensation largely differs from Inclination compensation in that the moving axis is not a compensation axis; Inclination compensation is applied directly to the moving axis.

This relationship is specified by a parameter (for example, to apply compensation to the Y-axis as movement occurs along the X-axis).

Benefits

- Improvement of the precision for perpendicular axes
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-J747 | 30i-B Straightness Compensation |
| A02B-0326-J747 | 31i-B5 Straightness Compensation |
| A02B-0327-J747 | 31i-B Straightness Compensation |
| A02B-0328-J747 | 32i-B Straightness Compensation |
| A02B-0333-J747 | 35i-B Straightness Compensation |
| A02B-0339-J747 | 0i-TF Straightness Compensation |
| A02B-0339-J799 | 0i-TF Simple Straightness Compensation |
| A02B-0340-J747 | 0i-MF Straightness Compensation |
| A02B-0340-J799 | 0i-MF Simple Straightness Compensation |
| A02B-0349-J747 | 0i-TFP Straightness Compensation |
| A02B-0349-J799 | 0i-TFP Simple Straightness Compensation |
| A02B-0350-J747 | 0i-MFP Straightness Compensation |
| A02B-0350-J799 | 0i-MFP Simple Straightness Compensation |
| A02B-0353-J747 | 30i-BP Straightness Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

472

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0356-J747 | 31i-B5P Straightness Compensation |
| A02B-0357-J747 | 31i-BP Straightness Compensation |
| A02B-0358-J747 | 32i-BP Straightness Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

473

Accuracy Compensation Functions

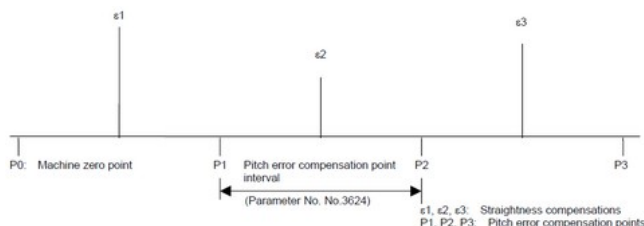

Interpolation Type Straightness Compensation

Features

The Interpolation Straightness Compensation function outputs divided compensation pulses between compensation points so that smoother straightness compensation can be realized.

In conventional straightness compensation, for each interval between pitch error compensation points set by parameters, the amount of all straightness compensation at the compensation point is output and compensation is performed. This function equally divides the amount of compensation for each interval between pitch error compensation points for compensation data set using 128 straightness compensation points and outputs it as a compensation pulse.

Benefits

- Increase of the precision of the compensation for parallel axes
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0323-R334 | 30i-B Interpolation Type Straightness Compensation (STEP 2) |
| A02B-0326-R334 | 31i-B5 Interpolation Type Straightness Compensation (STEP 2) |
| A02B-0327-R334 | 31i-B Interpolation Type Straightness Compensation (STEP 2) |
| A02B-0328-R334 | 32i-B Interpolation Type Straightness Compensation (STEP 2) |
| A02B-0339-R334 | 0i-TF Interpolation Type Straightness Compensation (STEP 2) |
| A02B-0340-R334 | 0i-MF Interpolation Type Straightness Compensation (STEP 2) |
| A02B-0349-R334 | 0i-TFP Interpolation Type Straightness Compensation |
| A02B-0350-R334 | 0i-MFP Interpolation Type Straightness Compensation |
| A02B-0353-R334 | 30i-BP Interpolation Type Straightness Compensation |
| A02B-0356-R334 | 31i-B5P Interpolation Type Straightness Compensation |
| A02B-0357-R334 | 31i-BP Interpolation Type Straightness Compensation |
| A02B-0358-R334 | 32i-BP Interpolation Type Straightness Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

474

Accuracy Compensation Functions

Interpolated Straightness Compensation 3072 Points

Features

The Interpolated Straightness Compensation 3072 Points function increases the number of compensation points to 3072.

The number of points which can be used for one pair of Interpolated straightness compensation is expanded to 1536.

As a result, a more accurate machining can be realized than with the standard compensations performed by the Interpolated Straightness Compensation function.

Benefits

- Increases significantly the correction accuracy
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------|
| A02B-0323-R638 | 30i-B Interpolation Type Straightness Compensation 3072 Points |
| A02B-0326-R638 | 31i-B5 Interpolation Straightness Compensation 3072 Points |
| A02B-0327-R638 | 31i-B Interpolation Straightness Compensation 3072 Points |
| A02B-0328-R638 | 32i-B Interpolation Type Straightness Compensation 3072 Points |
| A02B-0339-R638 | 0i-TF Interpolation Type Straightness Compensation 3072 Points |
| A02B-0340-R638 | 0i-MF Interpolation Type Straightness Compensation 3072 Points |
| A02B-0349-R638 | 0i-TFP Interpolation Type Straightness Compensation 3072 Points |
| A02B-0350-R638 | 0i-MFP Interpolation Type Straightness Compensation 3072 Points |
| A02B-0353-R638 | 30i-BP Interpolation Type Straightness Compensation - 3072 Points |
| A02B-0356-R638 | 31i-B5P Interpolation Type Straightness Compensation - 3072 Points |
| A02B-0357-R638 | 31i-BP Interpolation Type Straightness Compensation - 3072 Points |
| A02B-0358-R638 | 32i-BP Interpolation Type Straightness Compensation - 3072 Points |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

475

Accuracy Compensation Functions

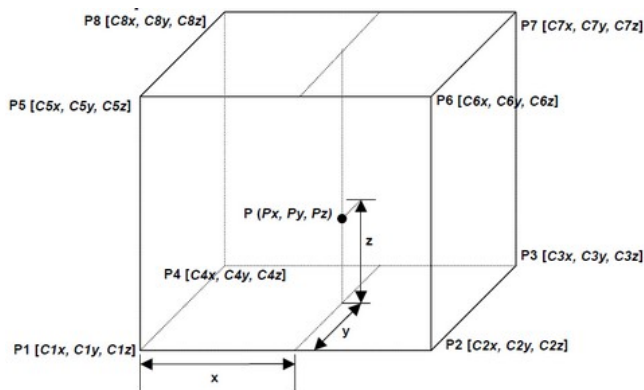

3-Dimensional Error Compensation

Features

In ordinary pitch error compensation, the compensation is applied to a specified compensation axis according to the positional information of that axis. For example, pitch error compensation for the X-axis is performed based on the X-axis positional information.

With the 3-Dimensional Error Compensation function, the compensation is performed for the current position for up to three compensation axes by calculating the compensation data (for three axes) from the compensation amounts at eight periphery compensation points based on the internal ratio in a compensation area (rectangular parallelepiped) including the current position.

Benefits

- Increase of the correction and compensation efficiency
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-S666 | 30i-B 3-D Error Compensation |
| A02B-0326-S666 | 31i-B5 3-D Error Compensation |
| A02B-0327-S666 | 31i-B 3-D Error Compensation |
| A02B-0328-S666 | 32i-B 3-Dimensional Error Compensation |
| A02B-0353-S666 | 30i-BP 3-Dimensional Error Compensation |
| A02B-0356-S666 | 31i-B5P 3-Dimensional Error Compensation |
| A02B-0357-S666 | 31i-BP 3-Dimensional Error Compensation |
| A02B-0358-S666 | 32i-BP 3-Dimensional Error Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

476

Accuracy Compensation Functions

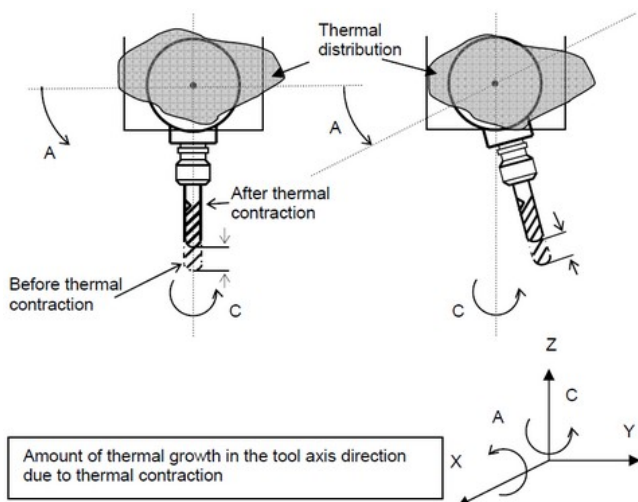

Thermal Growth Compensation Along Tool Vector

Features

The Thermal Growth Compensation Along Tool Vector function is used in five-axis machine applications where the tool is controlled by two rotary axes.

The compensation for thermal expansion or shrinkage of the tool can be applied along the tool vector specified with the rotation axes.

This function compensates for the thermal tool displacement set along the tool vector by setting the displacement as the input signal from the PMC or another unit.

Benefits

- Compensation of thermal effects on 5-axis machines
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-S860 | 30i-B Thermal Growth Compensation |
| A02B-0326-S860 | 31i-B5 Thermal Growth Compensation |
| A02B-0327-S860 | 31i-B Thermal Growth Compensation |
| A02B-0328-S860 | 32i-B Thermal Growth Compensation along Tool Vector |
| A02B-0353-S860 | 30i-BP Thermal Growth Compensation along Tool Vector |
| A02B-0356-S860 | 31i-B5P Thermal Growth Compensation along Tool Vector |
| A02B-0357-S860 | 31i-BP Thermal Growth Compensation along Tool Vector |
| A02B-0358-S860 | 32i-BP Thermal Growth Compensation along Tool Vector |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

477

Accuracy Compensation Functions

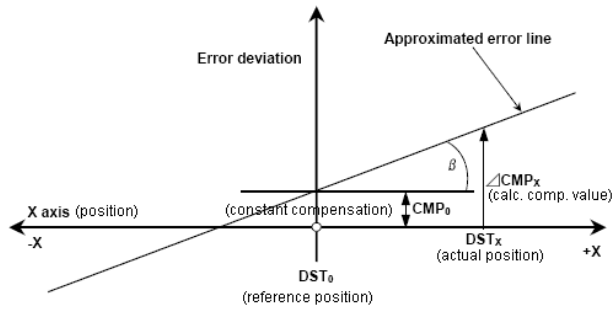

Linear Inclination Compensation Function

Features

The Linear Inclination Compensation function compensates the change of state of the machine by the approximated error line by the parameter of straight line slope and slice.

In Inclination Compensation, up to 3 approximated error lines are compensated. This function compensate it by one approximated error line. Moreover, this function can work independently of other compensation functions such as pitch error compensation, etc.

Benefits

- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-R520 | 30i-B Linear Inclination Compensation Function |
| A02B-0326-R520 | 31i-B5 Linear Inclination Compensation Function |
| A02B-0327-R520 | 31i-B Linear Inclination Compensation Function |
| A02B-0328-R520 | 32i-B Linear Inclination Compensation Function |
| A02B-0353-R520 | 30i-BP Linear Inclination Compensation Function |
| A02B-0356-R520 | 31i-B5P Linear Inclination Compensation Function |
| A02B-0357-R520 | 31i-BP Linear Inclination Compensation Function |
| A02B-0358-R520 | 32i-BP Linear Inclination Compensation Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

478

Accuracy Compensation Functions

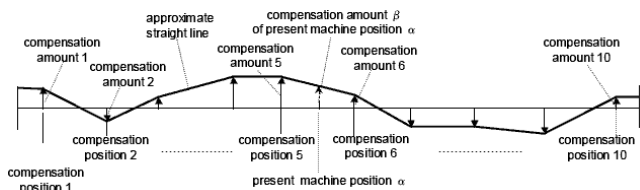

3-Dimensional Machine Position Compensation

Features

The 3-Dimensional Machine Position Compensation function compensates machine position errors that occur during processing along an approximate straight line formed with specified compensation point in a machine coordinate and a compensation amount related to it.

Compensation of this function is carried out along nine approximate straight lines formed with ten compensation points and compensation amounts related to the respective compensation points.

Compensation amounts can be rewritten by the PMC window function or programmable parameter input (G10 L52), in addition, the rewritten value immediately becomes effective. Therefore, this function can be applied to compensation for those machine position errors that occurs during processing.

Benefits

- Compensation of large machine tools
- Improvement of machine precision
- Increase of production quality and overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-R581 | 30i-B 3-Dimensional Machine Position Compensation |
| A02B-0326-R581 | 31i-B5 3-Dimensional Machine Position Compensation |
| A02B-0327-R581 | 31i-B 3-Dimensional Machine Position Compensation |
| A02B-0328-R581 | 32i-B 3-Dimensional Machine Position Compensation |
| A02B-0353-R581 | 30i-BP 3-Dimensional Machine Position Compensation |
| A02B-0356-R581 | 31i-B5P 3-Dimensional Machine Position Compensation |
| A02B-0357-R581 | 31i-BP 3-Dimensional Machine Position Compensation |
| A02B-0358-R581 | 32i-BP 3-Dimensional Machine Position Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

479

Accuracy Compensation Functions

3-Dimensional Rotary Error Compensation

Features

The 3D Rotary Error Compensation improves the correction of geometric machine errors by including not only linear axes but also any rotary axes that are used in the machining envelope.

In contrast to most compensation options, this function is able to process three-dimensional measurement data for the overall machine volume and makes it ideal for five-axis machines.

Benefits

- Greater Cutting Accuracy and Precision

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-R649 | 30i-B 3-D Rotary Error Compensation |
| A02B-0326-R649 | 31i-B5 3-D Rotary Error Compensation |
| A02B-0327-R649 | 31i-B 3-D Rotary Error Compensation |
| A02B-0328-R649 | 32i-B 3-Dimensional Rotary Error Compensation |
| A02B-0353-R649 | 30i-BP 3-Dimensional Rotary Error Compensation |
| A02B-0356-R649 | 31i-B5P 3-Dimensional Rotary Error Compensation |
| A02B-0357-R649 | 31i-BP 3-Dimensional Rotary Error Compensation |
| A02B-0358-R649 | 32i-BP 3-Dimensional Rotary Error Compensation |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

480

Accuracy Compensation Functions

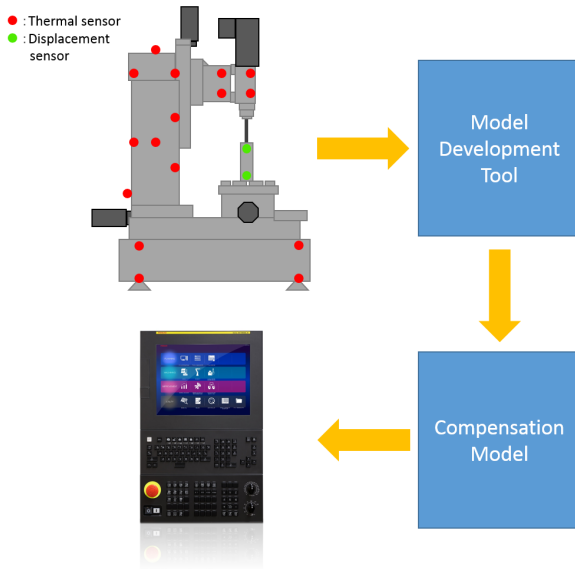

AI Thermal Displacement Compensation

Features

Temperature changes affect the accuracy of machine tools. It is possible to compensate this effect, but finding the right dependency between temperature and displacement is a difficult task that has to be performed by experts. AI Thermal Displacement Compensation Model Development Tool uses Machine Learning to create a model of the machine's thermal behavior, making it much easier to find that dependency between temperature and displacement. Thus AI Thermal Displacement Compensation reduces time to market and saves R&D resources. The model's estimations are used to compensate thermal displacement during operation, improving machine accuracy.

Benefits

- Reduce time to market
- Save R&D resources
- Improve machine accuracy

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------|
| A02B-0323-R335 | 30i-B AI Thermal Displacement Compensation |
| A02B-0326-R335 | 31i-B5 AI Thermal Displacement Compensation |
| A02B-0327-R335 | 31i-B AI Thermal Displacement Compensation |
| A02B-0328-R335 | 32i-B AI Thermal Displacement Compensation |
| A02B-0339-R335 | 0i-TF AI Thermal Displacement Compensation |
| A02B-0340-R335 | 0i-MF AI Thermal Displacement Compensation |
| A02B-0349-R335 | 0i-TFP AI Thermal Displacement Compensation |
| A02B-0350-R335 | 0i-MFP AI Thermal Displacement Compensation |
| A02B-0353-R335 | 30i-BP AI Thermal Displacement Compensation |
| A02B-0356-R335 | 31i-B5P AI Thermal Displacement Compensation |
| A02B-0357-R335 | 31i-BP AI Thermal Displacement Compensation |
| A02B-0358-R335 | 32i-BP AI Thermal Displacement Compensation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

481

Functions

Hobbing / Electronic Gear Box

This section of the catalogue contains the functions related to hobbing functions and Electronic Gear Box (EGB) functions for gear cutting and gear grinding machines.

Some of the functions detailed in the catalogue:

- Electronic Gear Box
- Skip function for Electronic Gear Box
- Spindle Electronic Gear Box
- Phase synchronization
- Etc.


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

482

Hobbing / Electronic Gear Box

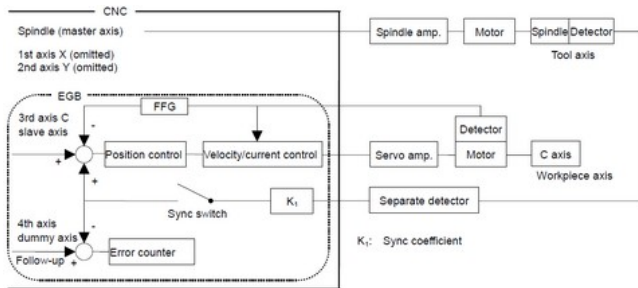

Electronic Gear Box (EGB)

Features

This function enables fabrication of high-precision gears, screws, and other components by rotating the workpiece in synchronization with a rotating tool or by moving the tool in synchronization with a rotating workpiece.

The rate of synchronization can be specified with a program. The synchronization of tool and workpiece axes with this function adopts a system in which the synchronization is directly controlled by digital servo, so that the workpiece axis can follow up the speed fluctuations on the tool axis with no error, thereby allowing fabrication of high-precision cogwheels.

Benefits

- Addition of the Electronic Gear Box (EGB) function to the CNC
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J779 | 30i-B Electronic Gear Box |
| A02B-0326-J779 | 31i-B5 Electronic Gear Box |
| A02B-0327-J779 | 31i-B Electronic Gear Box |
| A02B-0328-J779 | 32i-B Electronic Gear Box |
| A02B-0339-J779 | 0i-TF Electronic Gear Box (EGB) |
| A02B-0340-J779 | 0i-MF Electronic Gear Box (EGB) |
| A02B-0353-J779 | 30i-BP Electronic Gear Box (EGB) |
| A02B-0356-J779 | 31i-B5P Electronic Gear Box (EGB) |
| A02B-0357-J779 | 31i-BP Electronic Gear Box (EGB) |
| A02B-0358-J779 | 32i-BP Electronic Gear Box (EGB) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

483

Hobbing / Electronic Gear Box

Skip Function for Electronic Gear Box (EGB) Axis

Features

The Skip function for EGB axis enables the skip or high-speed skip signal for the EGB slave axis in synchronization mode with the EGB (electronic gear box).

This function has following features:

1. If a skip signal is input while an EGB axis skip command block is being executed, this block does not terminate until the specified number of skip signals have been input.
2. If a skip signal is input while an EGB axis skip command block is being executed, the tool remains in synchronous mode and moves, not stopping on the EGB slave axis.
3. The machine coordinates assumed when skip signals are input and the number of input skip signals are stored in specified custom macro variables.

Benefits

- Addition of interaction between external signals and the EGB function
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J696 | 30i-B Skip Function for EGB Axis |
| A02B-0326-J696 | 31i-B5 Skip Function for EGB Axis |
| A02B-0327-J696 | 31i-B Skip Function for EGB Axis |
| A02B-0328-J696 | 32i-B Skip Function for EGB Axis |
| A02B-0339-J696 | 0i-TF Skip Function for EGB Axis |
| A02B-0340-J696 | 0i-MF Skip Function for EGB Axis |
| A02B-0353-J696 | 30i-BP Skip Function for EGB Axis |
| A02B-0356-J696 | 31i-B5P Skip Function for EGB Axis |
| A02B-0357-J696 | 31i-BP Skip Function for EGB Axis |
| A02B-0358-J696 | 32i-BP Skip Function for EGB Axis |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

484

Hobbing / Electronic Gear Box

Electronic Gear Box (EGB) - 2 pairs

Features

The Electronic Gear Box (EGB) function is a function for rotating a workpiece in sync with a rotating tool, or to move a tool in sync with a rotating workpiece. With this function, the high-precision machining of gears, threads, and other similar machining processes can be implemented.

A desired synchronization ratio can be programmed. Up to 2 sets of axes can be synchronized. A gear grinding machine can be controlled, for instance, by using one axis for rotating the workpiece in sync with the tool and another axis for performing dressing in sync with the tool.

Benefits

- Addition of 2 sets of axis in the synchronization
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-S710 | 30i-B Electronic Gear Box, 2 Pairs |
| A02B-0326-S710 | 31i-B5 Electronic Gear Box, 2 Pairs |
| A02B-0327-S710 | 31i-B Electronic Gear Box, 2 Pairs |
| A02B-0328-S710 | 32i-B Electronic Gear Box, 2 Pairs |
| A02B-0340-S710 | 0i-MF Electronic Gear Box, 2 Pairs |
| A02B-0353-S710 | 30i-BP Electronic Gear Box - 2 Pairs |
| A02B-0356-S710 | 31i-B5P Electronic Gear Box - 2 Pairs |
| A02B-0357-S710 | 31i-BP Electronic Gear Box - 2 Pairs |
| A02B-0358-S710 | 32i-BP Electronic Gear Box - 2 Pairs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

485

Hobbing / Electronic Gear Box

Electronic Gear Box (EGB) Automatic Phase Synchronization

Features

With the Electronic Gear Box (EGB) function active and when synchronization start or cancellation is specified, the synchronization is not started or canceled immediately. Instead, acceleration / deceleration is executed first. In this case, synchronization can be started or canceled while the spindle is rotating; the synchronization ratio can also be changed while the spindle is rotating.

At synchronization start, automatic phase synchronization is performed such that the workpiece axis position matches the position corresponding to the spindle one-rotation signal. With this synchronization, the same operation is performed as synchronization start caused by a one-rotation signal in hobbing synchronization when using the functions of a hobbing machine.

The spindle corresponds to the EGB master axis and the workpiece axis corresponds to an EGB slave axis.

Benefits

- Addition of automatic synchronization to the EGB function
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------|
| A02B-0323-S711 | 30i-B Electronic Gear Box Automatic Phase Synchronisation |
| A02B-0326-S711 | 31i-B5 Electronic Gear Box Automatic Phase Synchronisation |
| A02B-0327-S711 | 31i-B Electronic Gear Box Automatic Phase Synchronisation |
| A02B-0328-S711 | 32i-B Electronic Gear Box Automatic Phase Synchronisation |
| A02B-0339-S711 | 0i-TF Electronic Gear Box Automatic Phase Synchronisation |
| A02B-0340-S711 | 0i-MF Electronic Gear Box Automatic Phase Synchronisation |
| A02B-0353-S711 | 30i-BP EGB Automatic Phase Synchronisation |
| A02B-0356-S711 | 31i-B5P EGB Automatic Phase Synchronisation |
| A02B-0357-S711 | 31i-BP EGB Automatic Phase Synchronisation |
| A02B-0358-S711 | 32i-BP EGB Automatic Phase Synchronisation |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

486

Hobbing / Electronic Gear Box

Spindle Electronic Gear Box (EGB)

Features

A gear can be shaped (grind/cut) by the synchronization of the workpiece axis rotation to the tool axis (grinding axis / hob) rotation using two spindles as a tool axis and a workpiece axis. To synchronize these two axes, the Electronic gear box (EGB) is used.

In the Spindle EGB, the synchronous pulse is produced from the feedback pulse of the position detector attached to the tool axis (master axis) in the motor control, and the workpiece axis (slave axis) rotates with the pulse. Feedback pulse from Master side to Slave side is forwarded by the communication between spindle amplifiers.

The specifications of the Spindle EGB control are as follows:

1. The Spindle EGB synchronization is started by specifying T command (number of teeth) and L command (number of hob threads), which determine the synchronous ratio, in G81 block. The Spindle EGB synchronization is canceled by specifying G80.
2. The synchronous ratio is calculated from T and L command in G81 block and the number of position detector pulses per rotation about the tool and the workpiece axis (parameter setting).
3. This function has the retract function like the hobbing function.
4. The cutting helical gear is performed by specifying Q command (module or diametral pitch) and P command (gear helix angle) in G81 block.
5. The Spindle EGB synchronization is maintained regardless of whether the operation is automatic or manual.

Benefits

- Addition of the Electronic Gear Box function to Spindle
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-S720 | 30i-B Spindle Electronic Gear Box |
| A02B-0326-S720 | 31i-B5 Spindle Electronic Gear Box |
| A02B-0327-S720 | 31i-B Spindle Electronic Gear Box |
| A02B-0328-S720 | 32i-B Spindle Electronic Gear Box |
| A02B-0339-S720 | 0i-TF Spindle Electronic Gear Box |
| A02B-0353-S720 | 30i-BP Spindle Electronic Gear Box |
| A02B-0356-S720 | 31i-B5P Spindle Electronic Gear Box |
| A02B-0357-S720 | 31i-BP Spindle Electronic Gear Box |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

487

| Specification | Description |
|----------------|------------------------------------|
| A02B-0358-S720 | 32i-BP Spindle Electronic Gear Box |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

488

Hobbing / Electronic Gear Box

Flexible Synchronous Control

Features

The Flexible Synchronous Control function applies to hobbing machines and other machines that require synchronization of multiple sets of axes with various gear ratios.

This function allows up to four individual sets to be synchronized independently. This can implement features specific to the hobbing machine such as synchronization between hobbing axis and a workpiece axis, Z-C synchronization in helical gear cutting, and Y-C synchronization in hobbing axis shift.

The specifications of Flexible Synchronous Control are as follows:

1. The master axis number, slave axis number, and gear ratio are set in parameters.
2. There are four groups of these parameters. Synchronization of four groups can be performed at the same time.
3. For multiple master axes, one slave axis can also be specified.
4. Synchronization is started and canceled by DI signals from the PMC. When DI signal switching is to be made during automatic operation, a parameter-set M code must be used.
5. The two Cs axes can also be used as a master axis and slave axis.
6. The two Cs axes can also be used as a master axis and slave axis.
7. Feedback pulses of the spindle operating as the Cs axis can be used for feed per revolution. The command format is G95P_;; where P_; is the axis number of Cs axis.

Benefits

- Addition of automatic synchronization to the Electronic Gear Box function
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-S709 | 30i-B Flexible Synchronous Control |
| A02B-0326-S709 | 31i-B5 Flexible Synchronous Control |
| A02B-0327-S709 | 31i-B Flexible Synchronous Control |
| A02B-0328-S709 | 32i-B Flexible Synchronous Control |
| A02B-0339-S709 | 0i-TF Flexible Synchronous Control |
| A02B-0340-S709 | 0i-MF Flexible Synchronous Control |
| A02B-0349-S709 | 0i-TFP Flexible Synchronous Control |
| A02B-0350-S709 | 0i-MFP Flexible Synchronous Control |
| A02B-0351-S709 | 0i-LFP Flexible Synchronous Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

489

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0353-S709 | 30i-BP Flexible Synchronous Control |
| A02B-0356-S709 | 31i-B5P Flexible Synchronous Control |
| A02B-0357-S709 | 31i-BP Flexible Synchronous Control |
| A02B-0358-S709 | 32i-BP Flexible Synchronous Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

490

Hobbing / Electronic Gear Box

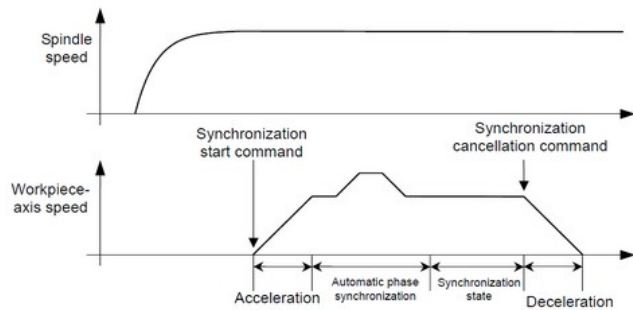

Automatic Phase Synchronization for Flexible Synchronous Control

Features

In Flexible Synchronous Control, when synchronization start or cancellation is specified, acceleration/deceleration is executed.

By this acceleration/deceleration, synchronization can be started or canceled while the master axis is moving.

Also, automatic phase synchronization can be performed such that the machine coordinate zero position of the master axis matches the slave axis machine coordinate position at the synchronization start.

Benefits

- Addition of automatic synchronization to the Electronic Gear Box function
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------|
| A02B-0323-S611 | 30i-B Automatic Phase Synchronization for Flexible Synchronous Control |
| A02B-0326-S611 | 31i-B5 Automatic Phase Synchronization for Flexible Synchronous Control |
| A02B-0327-S611 | 31i-B Automatic Phase Synchronization for Flexible Synchronous Control |
| A02B-0328-S611 | 32i-B Automatic Phase Synchronization for Flexible Synchronous Control |
| A02B-0339-S611 | 0i-TF Automatic Phase Synchronisation for Flexible Synchronous Control |
| A02B-0340-S611 | 0i-MF Automatic Phase Synchronisation for Flexible Synchronous Control |
| A02B-0351-S611 | 0i-LFP Automatic Phase Synchronisation for Flexible Synchronous Control |
| A02B-0353-S611 | 30i-BP Automatic Phase Synchronisation for Flexible Synchronous Control |
| A02B-0356-S611 | 31i-B5P Automatic Phase Synchronisation for Flexible Synchronous Control |
| A02B-0357-S611 | 31i-BP Automatic Phase Synchronisation for Flexible Synchronous Control |
| A02B-0358-S611 | 32i-BP Automatic Phase Synchronisation for Flexible Synchronous Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

491

Hobbing / Electronic Gear Box

Inter-Path Flexible Synchronization Control

Features

The Inter-Path Flexible Synchronous Control function enables Flexible Synchronous Control between axes in different paths in multi-path systems.

Up to 4 slave axes can be specified in one path. An axis in other path can be specified as master axis of each slave axes. All synchronization pairs in all paths can be performed simultaneously.

Benefits

- Increase of machine design flexibility
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-S610 | 30i-B Inter-Path Flexible Synchronous Control |
| A02B-0326-S610 | 31i-B5 Inter-Path Flexible Synchronous Control |
| A02B-0327-S610 | 31i-B Inter-Path Flexible Synchronous Control |
| A02B-0328-S610 | 32i-B Inter-Path Flexible Synchronous Control |
| A02B-0339-S610 | 0i-TF Inter-Path Flexible Synchronous Control |
| A02B-0340-S610 | 0i-MF Inter-Path Flexible Synchronous Control |
| A02B-0353-S610 | 30i-BP Inter-Path Flexible Synchronous Control |
| A02B-0356-S610 | 31i-B5P Inter-Path Flexible Synchronous Control |
| A02B-0357-S610 | 31i-BP Inter-Path Flexible Synchronous Control |
| A02B-0358-S610 | 32i-BP Inter-Path Flexible Synchronous Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

492

Hobbing / Electronic Gear Box

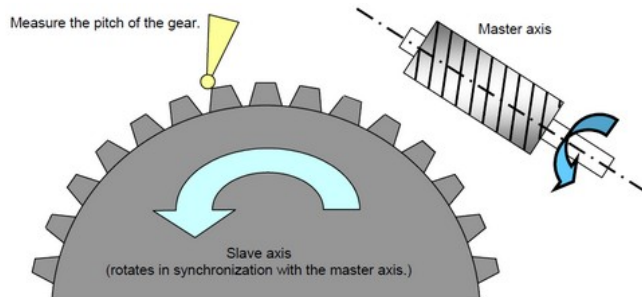

Skip Function for Flexible Synchronization Control

Features

This function provides the capability that Skip function or High-Speed Skip function can be commanded for the slave axis in Flexible Synchronous Control mode.

Features:

- The program block to enable the function is not interrupted until the total number of skip signal inputs reaches a value specified in the same block
- The machine coordinate position of the slave axis at each time of the signal inputs is stored in one of consecutive custom macro variables. The top number of the variables is specified in the block.
- The total number of the inputs is stored in another specified variable.

Benefits

- Addition of event driven control capabilities to Flexible Synchronous Control mode
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------|
| A02B-0323-S612 | 30i-B Skip Function for Flexible Synchronous Control |
| A02B-0326-S612 | 31i-B5 Skip Function for Flexible Synchronous Control |
| A02B-0327-S612 | 31i-B Skip Function for Flexible Synchronous Control |
| A02B-0328-S612 | 32i-B Skip Function for Flexible Synchronous Control |
| A02B-0339-S612 | 0i-TF Skip Function for Flexible Synchronous Control |
| A02B-0340-S612 | 0i-MF Skip Function for Flexible Synchronous Control |
| A02B-0351-S612 | 0i-LFP Skip Function for Flexible Synchronous Control |
| A02B-0353-S612 | 30i-BP Skip Function for Flexible Synchronous Control |
| A02B-0356-S612 | 31i-B5P Skip Function for Flexible Synchronous Control |
| A02B-0357-S612 | 31i-BP Skip Function for Flexible Synchronous Control |
| A02B-0358-S612 | 32i-BP Skip Function for Flexible Synchronous Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

493

Hobbing / Electronic Gear Box

Hob Command by Flexible Synchronous Control

Features

Allows the use of the hob command (G81/G81.4) prepared in the Electronic Gear Box function as a synchronization command for Flexible Synchronous Control.

Benefits

- Easy gear processing by Flexible Synchronous Control

Flexible Synchronous Control option is required

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------|
| A02B-0323-R847 | 30i-B Hob Command by Flexible Synchronisation Control |
| A02B-0326-R847 | 31i-B5 Hob Command by Flexible Synchronisation Control |
| A02B-0327-R847 | 31i-B Hob Command by Flexible Synchronisation Control |
| A02B-0328-R847 | 32i-B Hob Command by Flexible Synchronisation Control |
| A02B-0339-R847 | 0i-TF Hob Command by Flexible Synchronous Control |
| A02B-0340-R847 | 0i-MF Hob Command by Flexible Synchronous Control |
| A02B-0353-R847 | 30i-BP Hob Command by Flexible Synchronous Control |
| A02B-0356-R847 | 31i-B5P Hob Command by Flexible Synchronous Control |
| A02B-0357-R847 | 31i-BP Hob Command by Flexible Synchronous Control |
| A02B-0358-R847 | 32i-BP Hob Command by Flexible Synchronous Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

494

Hobbing / Electronic Gear Box

U-Axis Control 2 Pairs

Features


The U-Axis Control function enables two synchronous U-axis pairs to remain in a fixed position or to move at a programmed speed without using a mechanism such as a planetary gear box.

Benefits

- Change of diameter being machined during multitasking machining operations

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-R659 | 30i-B U-Axis Control 2 Pairs |
| A02B-0326-R659 | 31i-B5 U-Axis Control 2 Pairs |
| A02B-0327-R659 | 31i-B U-Axis Control 2 Pairs |
| A02B-0328-R659 | 32i-B U-Axis Control 2 Pairs |
| A02B-0353-R659 | 30i-BP U-Axis Control - 2 Pairs |
| A02B-0356-R659 | 31i-B5P U-Axis Control - 2 Pairs |
| A02B-0357-R659 | 31i-BP U-Axis Control - 2 Pairs |
| A02B-0358-R659 | 32i-BP U-Axis Control - 2 Pairs |

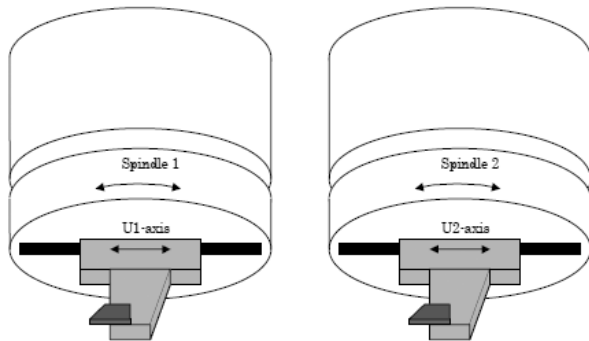

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

495

Functions

Grinding Functions

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0339-S682 | 0i-TF Grinding Function A |
| A02B-0339-S683 | 0i-TF Grinding Function B |
| A02B-0340-S682 | 0i-MF Grinding Function A |
| A02B-0340-S683 | 0i-MF Grinding Function B |
| A02B-0349-S682 | 0i-TFP Grinding Function A |
| A02B-0349-S683 | 0i-TFP Grinding Function B |
| A02B-0350-S682 | 0i-MFP Grinding Function A |
| A02B-0350-S683 | 0i-MFP Grinding Function B |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

496

Functions

Punch Press Functions

This section of the catalogue contains the functions related to Punch Press machines.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.


The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

497

Punch Press Functions

```
N3221 G90 G00 X110. Y160. C0.  
N3222 G72 X50. Y100.  
N3223 G26 I60. J90. K4 C45.
```

#1 to #4 : Order of punch motion in N3223
→ : Path of tool

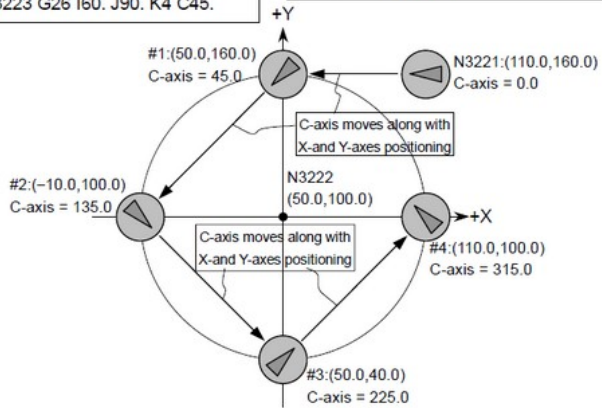

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

C-Axis Control

Features

The C-Axis Control function consist of the following functions:

- C-axis control (die angle indexing)
- C-axis synchronization control
- C-axis offset function

This function is a basic function in FANUC Series 0i-PF.

C-axis control (die-angle indexing)

For predetermined dies (tools) on a turret, the angular position of the die can be changed with a command from a tape, a memory or MDI.

In the past, it was necessary to use many dies when the die shape is the same but the die arrangement is different. Even in such a case, this new function makes it possible to conduct the operations only with one die since the function can freely change the angular position of the die. Further, since chamfering of four corners of a workpiece can be performed only with one die, the time required for die change is reduced, resulting in shorter machining time.

Further, in pattern function for a circular geometry bolt hole circle, arc pattern, and arc nibbling function, the C axis is automatically controlled so that one side of the die always faces the center of arc at each punching position.

C-axis synchronization control

The C-axis synchronization control function enables operation of the punch section of the die in sync with the die section of the die by using a separate servo motor for each section.

C-axis synchronization control simultaneously issues the same command to both servo motors. So, synchronization error correction, normally required to detect and reduce deviation between the two servo motors during synchronous operation, is not applied. In C-axis synchronization control, the master axis is referred to as the C1-axis, and the slave axis as the C2-axis.

C-axis offset function

For the punch press, a tool is used which allows the angle to be changed according to the machine. This type of rotary tool is subject to CNC C-axis control. A C command is used to change the angular position of a tool. When a machine controlling multiple tools of this type is used, mechanical adjustment of each tool is necessary to ensure correct punching.

This function simplifies mechanical adjustment by performing automatic C-axis offset when indexing up to 20 tools that allow angle changes. A machine that uses C-axis synchronization control enables offset to be performed separately for each of the C1-axis and C2-axis.

Benefits

- Reduction of the number of dies
- Simplification of the mechanical adjustments
- Increase of the productivity of the punch press

Ordering Information

| Specification | Description |
|----------------|-----------------------|
| A02B-0331-J601 | 30i-PB C-Axis Control |
| A02B-0332-J601 | 31i-PB C-Axis Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

499

Punch Press Functions

T- and C-Axes Simultaneous Control

Features

The conventional turret punch press cannot make a T-axis movement and C-axis movement simultaneously because of mechanical constraints. If the T and C commands are simultaneously specified, the CNC executes the commands successively.

Recently, machines without these mechanical constraints have been developed. The T-axis / C-axis simultaneous control function enables simultaneous control of the T-axis and C-axis on those new machines, consequently reducing the cycle time.

Benefits

- Reduction of the cycle time of the punch press
- Increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0331-S907 | 30i-PB T- and C-Axes Simultaneous Control |
| A02B-0332-S907 | 31i-PB T- and C-Axes Simultaneous Control |
| A02B-0338-S907 | 0i-PF T- and C-Axes Simultaneous Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

500

Punch Press Functions

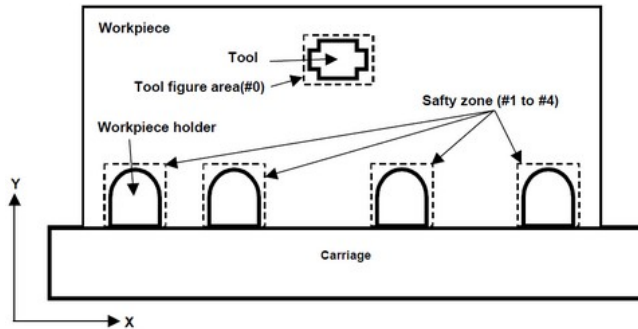

Safety Zone Check

Features

This is the safety function to set the safety zone for protecting the workpiece holder that holds the workpiece set on the carriage, and disable punching in that area or forbid the tool to approach thereinto.

This function permits to set tool figure area (#0) and up to four safety zones (#1 - #4), as shown above. Two types of safety zone check methods are available.

This function is a basic function in FANUC Series 0i-PF.

Benefits

- Reduce risks on the machine and breakdowns
- Increase the overall machine productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0331-J605 | 30i-PB Safety Zone Check |
| A02B-0332-J605 | 31i-PB Safety Zone Check |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

501

Punch Press Functions

Safety Zone Area Expansion

Features

This function extends the safety zone check function as follows:

- Extends the safety zone check areas: Up to 8
- Extends the safety zone tool areas: Up to 16
- Adds interference safety zone area signals (DO signals): Fn228, Fn238
- Improves the automatic safety-zone setting

Benefits

- Support of large punch press machines with multiple settings
- Reduce risks on the machine and breakdowns
- Increase the overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0331-S908 | 30i-PB Safety Zone Area Expansion |
| A02B-0332-S908 | 31i-PB Safety Zone Area Expansion |
| A02B-0338-S908 | 0i-PF Safety Zone Area Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

502

Punch Press Functions

Clamp Zone Avoidance Function

Features

By means of this function, the CNC monitors the positions of the tool and workpiece holder to avoid interference between the workpiece holder and tool.

Interference can be avoided automatically by the CNC or by the PMC, by using the DI/DO signals.

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0331-J622 | 30i-PB Clamp Zone Avoidance Function |
| A02B-0332-J622 | 31i-PB Clamp Zone Avoidance Function |
| A02B-0338-J622 | 0i-PF Clamp Zone Avoidance Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

503

Punch Press Functions

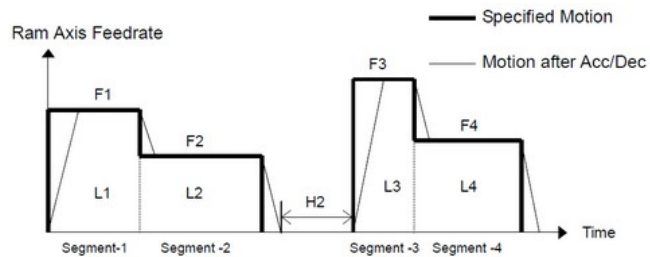

RAM-Axis Control

Features

The CNC cannot move RAM-axis by program command.

With this function, the RAM-axis moves automatically at the end of the block executing 1-cycle press by setting RAM-axis and the RAM-axis motion patterns.

Benefits

- Simplification of the RAM axis command
- Increase of the punching quality

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0331-S919 | 30i-PB RAM Axis Control |
| A02B-0332-S919 | 31i-PB RAM Axis Control |
| A02B-0338-S919 | 0i-PF RAM Axis Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

504

Punch Press Functions

Program Auto Restart

Features

When a laser cutting process is interrupted (by a reset operation or a power failure) the Program Auto Restart function provides the possibility to restart the cutting from the interruption point.

Benefits

- Fast restart of the production after an interruption
- Simplification of the programming of the restart process
- Overall increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0331-S904 | 30i-PB Automatic Program Restart |
| A02B-0332-S904 | 31i-PB Automatic Program Restart |
| A02B-0338-S904 | 0i-PF Program Automatic Restart |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

505

Punch Press Functions

Linear/Circular Punch Command

Features

These commands specify the punch operation from start to end point taking tool diameter and punch interval into account.

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0331-J602 | 30i-PB Linear / Circular Punch Command |
| A02B-0332-J602 | 31i-PB Linear / Circular Punch Command |
| A02B-0338-J602 | 0i-PF Linear / Circular Punch Command |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

506

Punch Press Functions

Y-Axis Crack Cancel

Features

With this function, when the M-codes which are set by parameters are commanded, the crack between work coordinate system and machine coordinate system of Y-axis repositioning motion is canceled.

Example 1

Y1525M30

Y-axis moves including the crack of repositioning.

Example 2

Y1525 ;

M30 ;

The work coordinate system is preset to the machine coordinate system to cancel the crack of repositioning by M30. (Y-axis does not move.)

Benefits

- Simplification of the programming

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0331-J616 | 30i-PB Y-Axis Crack Cancel |
| A02B-0332-J616 | 31i-PB Y-Axis Crack Cancel |
| A02B-0338-J616 | 0i-PF Y-Axis Crack Cancel |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

507

Punch Press Functions

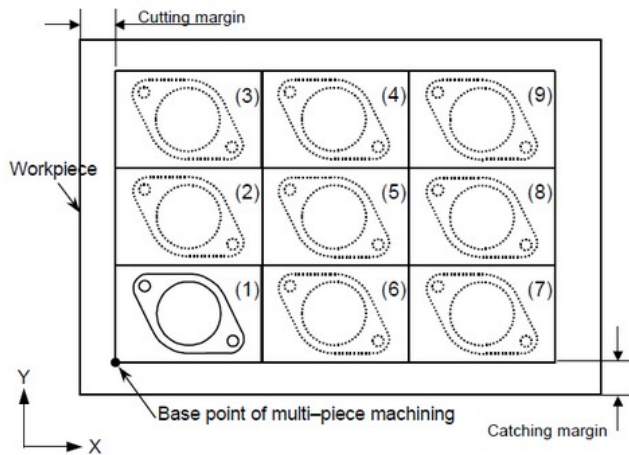

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Multi-Piece Machining

Features

The multi-piece machining function enables several sheets of product with the same punching shape to be produced from a single sheet of material at a time by simple commands.

This function allows so called "trial machining" that performs punching only on a sheet of product from the machining program for "multi-piece machining" by a simple setup method, therefore the machining program can be easily checked before full machining.

This function is a basic function in FANUC Series 0i-PF.

Benefits

- Simplification of the programming
- Overall increase of the machine efficiency and productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0331-J603 | 30i-PB Multi-Piece Machining |
| A02B-0332-J603 | 31i-PB Multi-Piece Machining |

508

Punch Press Functions

Multi-Piece Machining End Area Command

Features

End area can be specified in Multi-piece machining commands blocks.

Benefits

- Efficiency improvement of Multi-piece machining

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0331-S927 | 30i-PB Multi-Piece Machining End Area Command |
| A02B-0332-S927 | 31i-PB Multi-Piece Machining End Area Command |
| A02B-0338-S927 | 0i-PF Multi-Piece Machining End Area Command |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

509

Punch Press Functions

Tool Data Setting Function

Features

This function makes the area used for registering tool numbers, tool position compensation, punch count and other tool data available to the user.

This enables the user to customize the registered tool data. This allows the conventional tool data setting method to be changed and the number of tools that can be registered to be increased considerably.

Benefits

- Increase of the flexibility of the machine

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0331-J621 | 30i-PB Tool Data Setting Function |
| A02B-0332-J621 | 31i-PB Tool data Setting Function |
| A02B-0338-J621 | 0i-PF Tool Data Setting Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

510

Punch Press Functions

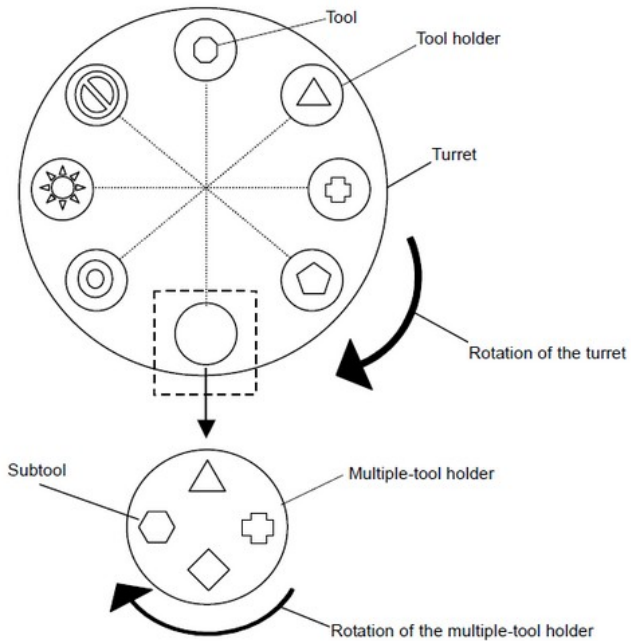

Multiple Tool Control

Features

A common way of handling the tools, i.e., the metal dies, for punch presses is to store each die in the tool holder. To select a tool, it is necessary to index the magazine containing the required tool holder to the position at which the tool is changed with a T command and to set the tool holder on the punch holder at that position.

In the multiple-tool system, however, one tool holder contains different types of metal dies. This makes it possible to change tools by simply moving the relevant tool holder. The multiple-tool system, therefore, reduces the time taken to change tools and enables a larger variety of tools to be used, enhancing the range of machining that can be performed.

This function is a basic function in FANUC Series 0i-PF.

Benefits

- Increase of the flexibility and efficiency of the machine

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0331-J604 | 30i-PB Multiple Tool Control |
| A02B-0332-J604 | 31i-PB Multiple Tool Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

511

Punch Press Functions

Tool Life Management

Features

The function sets the maximum punch count for each tool on the screen. If the actual punch count for a selected tool exceeds the predetermined maximum punch count, tool expired signal PTLCH is output.

Upon detecting this signal, the PMC outputs an alarm or instructs the operator to change the tool.

This function is a basic function in FANUC Series 0i-PF.

Benefits

- Increase of the quality of the machining

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0331-J614 | 30i-PB Tool Life Management |
| A02B-0332-J614 | 31i-PB Tool Life Management |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

512

Punch Press Functions

High Speed Press Function

Features

This function speeds up the execution of the following functions:

- 1-Cycle Press
- Nibbling function, Nibbling by M function
- High-Speed Press Control
- External Operation function
- RAM-Axis Control

The processing time of the punch finish signal *PFIN / nibble finish signal *NFIN is decreased, reducing the time between consecutive positioning blocks.

Benefits

- Improve the machine hit rate by about 5 to 15%
- Reduce the cycle time of punch presses and increase productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0338-S929 | 0i-PF High Speed Press Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

513

Functions

Laser Functions

This section of the catalogue contains the functions related to the CO2 Laser systems of FANUC.

Some of the functions detailed in the catalogue:

- Standard functions
- Gap control
- Cutting settings
- Laser high-speed control
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

514

Laser Functions



Standard Laser Functions

Features

The Series 30i-LB or Series 31i-LB CNC are specialized CNC that can be connected to a FANUC CO2 laser oscillator via a dedicated interface and can be used to control a high-performance laser machine easily.

Beside the standard CNC function set, the Series 30i-LB or Series 31i-LB CNC feature a rich set of specialized functions for laser control and laser machine control.

Key functions:

- Connection via a serial interface: the FANUC I/O LINK interface is used to connect the Series 30i-LB and Series 31i-LB CNC to a FANUC laser oscillator
- Laser Oscillator control: the following functions are provided in the LB CNC:
 - Oscillator start/stop sequence control
 - Automatic laser output compensation
 - Laser output feedback
 - Laser gas pressure control
 - Leakage check
 - Electric shutter control
 - Return light detection
 - Parameter management for uniform oscillator output
- Output control in synchronization with interpolation calculation:
 - Change an output command in each block separately
 - Control the output quickly without wasting time
 - Change the output without causing discontinuance between move commands
 - Control the output control according to the command type
- Automation of functions such as:
 - Assist gas control
 - Saving and restoring machining condition data
 - High-speed piercing control
 - Cutting restart function based on the retrace function

Benefits

- Fast and performant integration of a laser machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

515

Laser Functions

Laser Control Function

Features

With the Laser Control function, it is possible to control a FANUC Fiber Laser with a standard FANUC 30i/31i-B CNC. The purpose of this function is to enable combined machining where a FANUC Fiber Laser is integrated into a machine tool, e.g. a lathe or machining center. An M-code is used to switch between Laser machining mode and machining center / lathe system.

The following Laser options are already integrated into the Laser Control function option:

- Buffer Expansion
- Edge Cutting function
- Cutting Condition Setting function
- Addition of Cutting Condition Data

With the Laser Control function option, the following Laser options can be selected additionally:

- Gap Control for Laser
- Minimum Command 1% Duty Override
- Laser Oscillator Communication Control (FSSB Connection)

Benefits

- Enables the integration of a FANUC Fiber Laser into a machine tool

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-R845 | 30i-B Laser Control Function |
| A02B-0326-R845 | 31i-B5 Laser Control Function |
| A02B-0327-R845 | 31i-B Laser Control Function |
| A02B-0328-R845 | 32i-B Laser Control Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

516

Laser Functions

| NO. | FEED RATE | PWR. | FREQ. | DUTY | ASSIST GAS | STANDARD PRESS | KIND | TIME | DISPLACEMENT | OFFSET |
|-----|-----------|------|-------|------|------------|----------------|------|------|--------------|--------|
| 001 | 1000.000 | 1000 | 500 | 20 | 1.05 | 1 | 1.0 | | 1.000 | 0.50 |
| 002 | 2000.000 | 2000 | 100 | 60 | 2.05 | 2 | 2.0 | | 1.500 | 0.60 |
| 003 | 3000.000 | 3000 | 150 | 80 | 3.00 | 3 | 3.0 | | 2.000 | 0.70 |
| 004 | 4000.000 | 4000 | 250 | 100 | 4.00 | 4 | 4.0 | | 2.500 | 0.80 |
| 005 | 0.000 | 0 | 0 | 0 | 0.00 | 0 | 0.0 | | 0.000 | 0.00 |
| 006 | 0.000 | 0 | 0 | 0 | 0.00 | 0 | 0.0 | | 0.000 | 0.00 |
| 007 | 0.000 | 0 | 0 | 0 | 0.00 | 0 | 0.0 | | 0.000 | 0.00 |
| 008 | 0.000 | 0 | 0 | 0 | 0.00 | 0 | 0.0 | | 0.000 | 0.00 |
| 009 | 0.000 | 0 | 0 | 0 | 0.00 | 0 | 0.0 | | 0.000 | 0.00 |
| 010 | 0.000 | 0 | 0 | 0 | 0.00 | 0 | 0.0 | | 0.000 | 0.00 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Cutting Condition Setting Function

Features

The Cutting Condition Setting function saves the laser machining data (otherwise specified using the S, P, and Q addresses separately) all together in the memory and enables to process machining according to the saved data.

This function is provided for controlling the C laser oscillators. It requires the display unit with 10.4-inch color LCD.

This function is a basic function in 0i-LF Plus.

Benefits

- Simplification of the operation of the machine when repetitive parts are produced
- Reduction of the setup time
- Overall improvement of the machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0329-J886 | 30i-LB Cutting Condition Setting Function |
| A02B-0330-J886 | 31i-LB Cutting Condition Setting Function |

517

Laser Functions

Addition of Cutting Condition Data

Features

By specifying the addition of cutting condition data option, the specifications of the conventional cutting condition setting function are expanded.

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0329-S912 | 30i-LB Addition of Cutting Condition Data |
| A02B-0330-S912 | 31i-LB Addition of Cutting Condition Data |
| A02B-0351-S912 | 0i-LFP Addition of Cutting Condition Data |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

518

Laser Functions

Edge Cutting Function

Features

The edge cutting function detects edges, controls deceleration-to-stop, performs piercing, and controls the feed rate and power during a shift from piercing to cutting.

It is capable of producing sharper edges. Using this function requires the cutting condition setting function.

This function is a basic function in 0i-LF Plus.

Benefits

- Improvement of the cutting quality in edges
- Increase the quality of the cut and the performance of the machine
- Overall increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0329-J833 | 30i-LB Edge Cutting Function |
| A02B-0330-J833 | 31i-LB Edge Cutting Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

519

Laser Functions

Minimum Command 1% Duty Override

Features

This function allows to override the current laser pulse duty with an resolution of 1% compared to the standard resolution of 10%. The override value can be specified within a range of 0 to 200%. With this function, it is possible to adjust the laser pulse duty during cutting with a finer graduation.

Benefits

- Improves the quality of the cutting surface

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-S925 | 30i-B Minimum Command 1 % Duty Override |
| A02B-0326-S925 | 31i-B5 Minimum Command 1 % Duty Override |
| A02B-0327-S925 | 31i-B Minimum Command 1 % Duty Override |
| A02B-0328-S925 | 32i-B Minimum Command 1 % Duty Override |
| A02B-0329-S925 | 30i-LB Minimum Command 1 % Duty Override |
| A02B-0330-S925 | 31i-LB Minimum Command 1 % Duty Override |
| A02B-0351-S925 | 0i-LFP Minimum Command 1 % Duty Override |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

520

Laser Functions

Laser High-Speed Control Function 2

Features

This function allows to transfer 4 sets of laser output conditions every 8msec in AI-NANO contour control mode to the laser oscillator via FSSB I/O. The Laser output can be controlled every 125msec by commanding the laser output conditions to the laser oscillator via FSSB I/O.

4 sets of laser output conditions such as laser power or block overlap position are transferred to DSP software for laser control in AI-NANO contour control mode. The DSP software controls 1 laser output conditions every 125 u sec and commands to laser oscillator via FSSB I/O.

Benefits

- High-precision and high-speed laser processing can be realized
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0329-S922 | 30i-LB Laser High-Speed Control 2 |
| A02B-0330-S922 | 31i-LB Laser High-Speed Control 2 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

521

Laser Functions

Laser Oscillator Communication Control (HSSB Connection)

Features

Third-party laser oscillators can be connected to the CNC via HSSB. This option is necessary to control a third-party laser oscillator via HSSB.

The machine tool builder has to prepare a custom hardware to connect the laser source to the FANUC controller via HSSB board. Laser output commands are transmitted to the HSSB board and are output to the laser source by the custom hardware.

Benefits

- Controls third-party laser oscillators via HSSB optical communication

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------|
| A02B-0329-R833 | 30i-LB Laser Oscillator Communication Control (HSSB Connection) - to Control Laser via HSSB |
| A02B-0330-R833 | 31i-LB Laser Oscillator Communication Control (HSSB Connection) - to Control Laser via HSSB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

522

Laser Functions

Laser Oscillator Communication Control (FSSB Connection)

Features

Third-party laser oscillators can be connected to the CNC by the laser interface unit. The laser interface unit itself is connected to the CNC unit via FSSB. This option is needed to control a third-party laser oscillator via FSSB. Laser output commands are transmitted to the laser interface unit and are output as analog signals.

This function is a basic function in 0i-LF Plus.

Benefits

- Controls third-party laser oscillators via FSSB high speed communication

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------|
| A02B-0323-C210 | Laser Interface Unit |
| A02B-0323-S928 | 30i-B Laser Oscillator Communication Control (FSSB Connection) |
| A02B-0326-S928 | 31i-B5 Laser Oscillator Communication Control (FSSB Connection) |
| A02B-0327-S928 | 31i-B Laser Oscillator Communication Control (FSSB Connection) |
| A02B-0328-S928 | 32i-B Laser Oscillator Communication Control (FSSB Connection) |
| A02B-0329-S928 | 30i-LB Laser Oscillator Communication Control (FSSB Connection) - to Control Laser via FSSB |
| A02B-0330-S928 | 31i-LB Laser Oscillator Communication Control (FSSB Connection) - to Control Laser via FSSB |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

523

Laser Functions

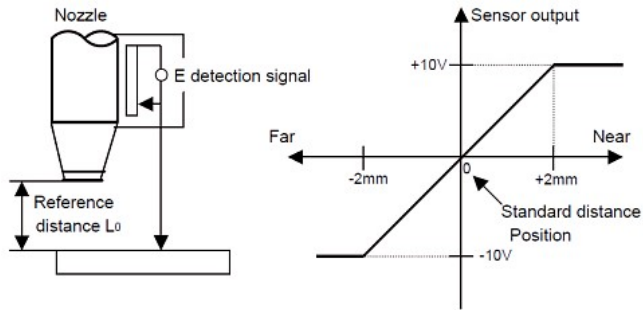

Gap Control for Laser

Features

When the laser cutting machine is equipped with a detector to measure the distance to the surface of the workpiece, it is possible with the Gap Control function to use an analog signal generated by this detector and send it to the CNC through a specified interface.

This signal is processed by the CNC and enables a precise gap control using the Z-axis of the CNC / machine.

This function is a basic function in 0i-LF Plus.

Benefits

- Control of the gap between nozzle and workpiece
- Improvement of the cutting quality

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-S930 | 30i-B Gap Control for Laser Cutting |
| A02B-0326-S930 | 31i-B5 Gap Control for Laser Cutting |
| A02B-0327-S930 | 31i-B Gap Control for Laser Cutting |
| A02B-0328-S930 | 32i-B Gap Control for Laser Cutting |
| A02B-0329-J817 | 30i-LB Gap Control |
| A02B-0330-J817 | 31i-LB Gap Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

524

Laser Functions

Automatic Gap Control Axis Retract & Approaching Function

Features

The Automatic Gap Control Axis Retraction and Approaching function enables an automatic retraction along the gap control axis under gap control during a positioning operation from the end point of the current cutting to the next cutting point along the X-/Y-axis.

It also enables to approach the workpiece along the gap control axis while approaching the next cutting point along the X-/Y-axis, without canceling the gap control mode, so the next cutting phase can be started.

This function is a basic function in 0i-LF Plus.

Benefits

- Increase the ease of use of the machine in nozzle approaching and retract cycles

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------|
| A02B-0329-S914 | 30i-LB Automatic Gap Control Axis Retraction and Approaching |
| A02B-0330-S914 | 31i-LB Automatic Gap Control Axis Retraction and Approaching |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

525

Laser Functions

Program Auto Restart

Features

When a laser cutting process is interrupted (by a reset operation or a power failure) the Program Auto Restart function provides the possibility to restart the cutting from the interruption point.

This function is a basic function in 0i-LF Plus.

Benefits

- Fast restart of the production after an interruption
- Simplification of the programming of the restart process
- Overall increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0329-S904 | 30i-LB Automatic Program Restart |
| A02B-0330-S904 | 31i-LB Automatic Program Restart |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

526

Laser Functions

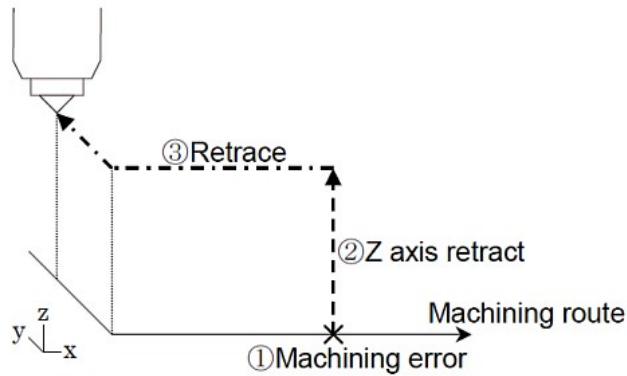

Cutting Restart

Features

The burning is generated in the laser cutting, and the cutting might not be able to be continued. In such a case, machining may be resumed by putting the machine back in the state in which it was before burning. This is done by a Processing Restart function.

If a machining error is detected, the cutting restart function moves the machine back to a specified position through the same path it had taken before the error occurred, while the laser beam is kept turned off.

When the machine gets back to the specified position, the cutting restart function again places the machine in an operable state and causes it to move forward to the position where it started going back.

This function is a basic function in 0i-LF Plus.

Benefits

- Simplification of the restart procedure of the machine in case of issue
- Simplification of the programming of the restart cycle
- Overall increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0329-J887 | 30i-LB Cutting Restart |
| A02B-0330-J887 | 31i-LB Cutting Restart |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

527

Laser Functions

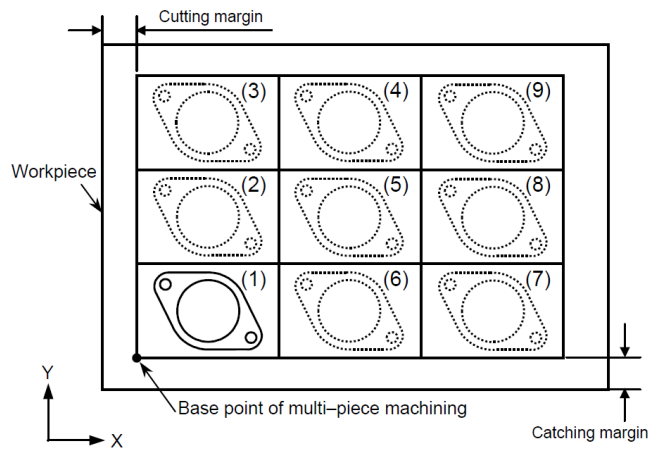

Multi-Piece Machining

Features

The Multi-piece Machining function enables several sheets of product with the same cut shape to be produced from a single sheet of material at a time by simple commands.

This function allows so called trial cutting that performs cutting only on a sheet of product from the cutting program for multi-piece machining by a simple setup method, therefore the cutting program can be easily checked before full machining.

Benefits

- Reduction of the time from try out to production

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0329-J603 | 30i-LB Multi-Piece Machining |
| A02B-0330-J603 | 31i-LB Multi-Piece Machining |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

528

Laser Functions

Multi-Piece Machining End Area Command

Features

With this function, the end area can be specified in Multi-piece machining comand blocks.

Benefits

- Efficiency improvement of Multi-piece machining

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0329-S927 | 30i-LB Multi-Piece Machining End Area Command |
| A02B-0330-S927 | 31i-LB Multi-Piece Machining End Area Command |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

529

Laser Functions

Buffer Expansion

Features

This function enhances the number of reading blocks at cutter compensation (parameter No.19625). To find correct actual path, the intersecting point at the movement blocks is calculated with cutter compensation.

When the block that has no movement is commanded, eight blocks or less are read until the block which has the movement is found in this intersection calculation.

In the laser cutting, the piercing command, the cutting condition command, the assist gas command and the command with no movement might be consecutive. Even if the block which has no movement is continued 30 blocks or less, this function enables to maintain the offset vector and the beam route in cutter compensation mode and start-up mode as usual.

Benefits

- Simplification of the programming
- Increase of the overall machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0329-J611 | 30i-LB Buffer Expansion |
| A02B-0330-J611 | 31i-LB Buffer Expansion |
| A02B-0351-J611 | 0i-LFP Buffer Expansion |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

530

Laser Functions

Punch Press Function for Compound Cutting

Features

When the function for Punch Press is activated and parameter ALA (No.16242#0) is 1, the punch press function becomes effective. As a result, the function of Series 30i/31i-PB CNC can be used also with Series 30i/31i-LB CNC.

When the punch press function is effective, the punch mode that does the punch press processing and the laser mode that does laser processing become possible. Each mode is switched by specified M code.

In the program, the punch press processing and the laser processing can be alternately done by one program when specified M code of each mode in the first block of the punch press processing and the laser processing.

Benefits

- Increase of the capabilities of the laser CNC to punch press

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0329-R815 | 30i-LB Punch Press Function |
| A02B-0330-R815 | 31i-LB Punch Press Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

531

Laser Functions

Attitude Control

Features

When at least five controlled axes are specified and attitude control is also specified, control can be applied to the attitude of the nozzle with the fourth and fifth axes used as rotational axes.

When using this function, the laser machine tool can be use as a three-dimensional machine tool.

Benefits

- Simplification of the programming
- Overall improvement of the machine productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0329-J827 | 30i-LB Attitude Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

532

Laser Functions

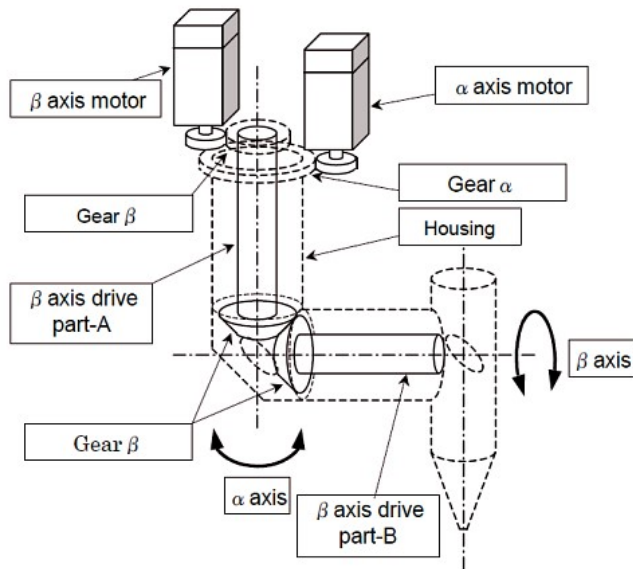

Interaction Control

Features

In nozzle attitude control, as shown in the diagram of the axis configuration of the nozzle head, the β axis motor is arranged around the Z axis. In the case of a structure which transmits by gear, if the α axis is commanded, the housing rotates and the nozzle rotates around the Z axis.

However, simultaneously at this time gear β must rotate around gear α . This movement results in the nozzle being rotated by the β axis.

Namely, if the α axis rotates by an α axis command, a rotational operation simultaneously occurs at the β axis.

Interaction control is the function to automatically generate commands in the β axis of the same amount as the α axis commands in order to cancel the rotational operation of the β axis for a nozzle head of axis configuration such that the β axis rotates by the α axis commands. The command polarity can be selected by parameter.

Benefits

- Simplification of the programming
- Overall increase of the machine productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------|
| A02B-0329-J864 | 30i-LB Interaction Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

533

Laser Functions

W-Axis Gap Control

Features

W axis gap control function is necessary for gap control using the second gap control axis.

Benefits

- When W axis gap control function is effective, the gap control axis can select either of the first gap control axis or the second gap control axis.

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0329-J825 | 30i-LB W-Axis Gap Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

534

Laser Functions

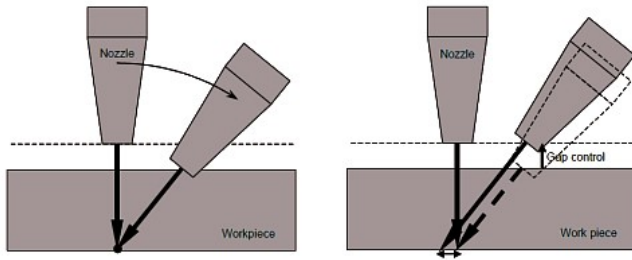

Bevel Cutting Compensation Function

Features

In the bevel cutting that uses the inclination to the work cutting side, the laser beam irradiation point specified by the program might become a work bottom.

Therefore, the laser beam irradiation point as a nozzle tip point in the nozzle length compensation function, operate the nozzle tip fixing mode, bevel angle changes, the nozzle might collide with the workpiece surface (left figure).

To avoid this collision, the gap control is used, the nozzle is done gap control in the vertical direction, the tracks error margin in the work bottom occurs (right figure).

By compensating the nozzle length automatically according to the bevel angle in the nozzle tip fixing mode, the bevel cutting compensation function loses the tracks error margin without the nozzle colliding with the workpiece surface.

Benefits

- Increase of the cutting capabilities of the machine
- Avoidance of the collision between the nozzle and the working table

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0329-S909 | 30i-LB Bevel Cutting Compensation Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

535

Laser Functions

Proximity Point Search

Features

If cycle start is executed with Proximity Point Search active, the control searches the the block that is next to the current nozzle position. The nozzle is then positioned at the start point of that block in feed hold state.

Benefits

- Facilitate 3-dimensional LASER processing

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0329-J839 | 30i-LB Proximity Point Search |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

536

Laser Functions

Spatial Corner Rounding

Features

Spatial Corner Rounding replaces corners in the motion path by arcs with a specified radius.

Benefits

- Facilitate 3-dimensional LASER processing

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0329-J866 | 30i-LB Spatial Corner Rounding |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

537

Laser Functions

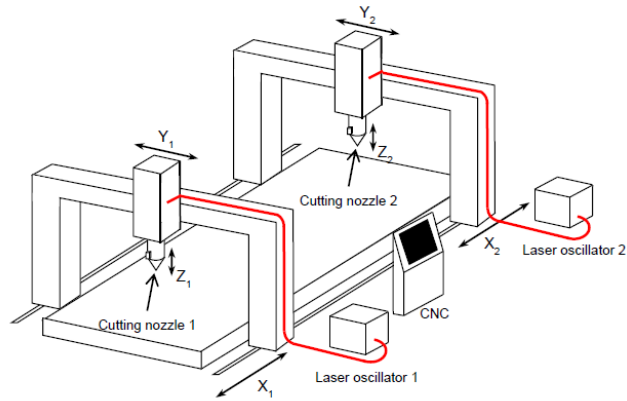

Two Laser Control Function

Features

This function allows to control 2 laser oscillators by one CNC. It is possible to control the 2 oscillators in different paths that execute different programs, or to synchronously control the laser oscillators.

Benefits

- More productive machines with 2 laser oscillators

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-S911 | 30i-B Two Laser Control Function |
| A02B-0326-S911 | 31i-B5 Two Laser Control Function |
| A02B-0327-S911 | 31i-B Two Laser Control Function |
| A02B-0328-S911 | 32i-B Two Laser Control Function |
| A02B-0329-S911 | 30i-LB Two Laser Control Function |
| A02B-0330-S911 | 31i-LB Two Laser Control Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

538

Laser Functions

Laser Data Log Output

Features

The Laser Data Output Log Function improves the "Output of Status Data at Alarm Occurrence" function. The function logs instantaneous status data for the laser oscillator if a laser alarm occurs. With this improvement, it is possible to log data for 10 seconds prior to the alarm occurrence. This facilitates the diagnosis of the alarm's root cause. The log data can be output to a file for inspection.

Benefits

- Find the cause of a laser alarm quickly

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-S933 | 30i-B Laser Data Log Output |
| A02B-0326-S933 | 31i-B5 Laser Data Log Output |
| A02B-0327-S933 | 31i-B Laser Data Log Output |
| A02B-0328-S933 | 32i-B Laser Data Log Output |
| A02B-0329-S933 | 30i-LB Laser Data Log Output |
| A02B-0330-S933 | 31i-LB Laser Data Log Output |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

539

Laser Functions

Laser Machining Package

Features

The Laser Machining Package for 0i-LF Plus combines options that are useful for laser machining. The following options are included in the package:

- Addition of Cutting Condition Data
- Multi-Piece Machining
- Multi-Piece Machining End Area Command
- Buffer Expansion
- Minimum Command 1% Duty Override

Benefits

- Easily select the options for laser machining applications on 0i-LF Plus

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0351-S932 | 0i-LFP Laser Machining Package |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

540

Laser Functions

Laser Trend Function

Features

Laser Trend Function periodically records the sensor data of the laser oscillator. This function is developed to improve FANUC FIBER LASER maintainability and streamline service work.

Benefits

- Improve FANUC FIBER LASER maintainability

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-S934 | 30i-B Laser Trend Function |
| A02B-0326-S934 | 31i-B5 Laser Trend Function |
| A02B-0327-S934 | 31i-B Laser Trend Function |
| A02B-0328-S934 | 32i-B Laser Trend Function |
| A02B-0329-S934 | 30i-LB Laser Trend Function |
| A02B-0330-S934 | 31i-LB Laser Trend Function |
| A02B-0351-S934 | 0i-LFP Laser Trend Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

541

Functions

Gas Cutting Machine Functions

This section of the catalogue contains the functions related to Gas Cutting machines.

Some of the functions detailed in the catalogue:

- Torch swing
- In- acceleration / deceleration
- Corner control
- Tool offset B
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

542

Gas Cutting Machine Functions

Functions for Gas Cutting Machine

Features

Options for the gas cutting machine functions by controller.

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-R535 | 30i-B Functions for Gas Cutting Machine |
| A02B-0326-R535 | 31i-B5 Functions for Gas Cutting Machine |
| A02B-0327-R535 | 31i-B Functions for Gas Cutting Machine |
| A02B-0353-R535 | 30i-BP Functions for Gas Cutting Machine |
| A02B-0356-R535 | 31i-B5P Functions for Gas Cutting Machine |
| A02B-0357-R535 | 31i-BP Functions for Gas Cutting Machine |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

543

Gas Cutting Machine Functions

Automatic Exact Stop Check

Features

The Automatic Exact Stop Check function checks the corner inner angle between successive blocks specifying linear interpolation (G01) or circular interpolation (G02, G03) and perform an exact stop automatically between the blocks if the angle is equal to or less than a set critical angle.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-R505 | 30i-B Automatic Exact Stop Check |
| A02B-0326-R505 | 31i-B5 Automatic Exact Stop Check |
| A02B-0327-R505 | 31i-B Automatic Exact Stop Check |
| A02B-0353-R505 | 30i-BP Automatic Exact Stop Check |
| A02B-0356-R505 | 31i-B5P Automatic Exact Stop Check |
| A02B-0357-R505 | 31i-BP Automatic Exact Stop Check |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

544

Gas Cutting Machine Functions

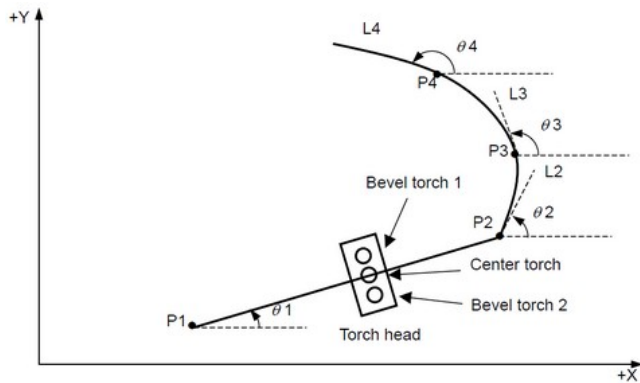

Torch Swing for Gas Cutting Machine

Features

For beveling using a torch head with a bevel torch (hereinafter simply referred to as a torch head), the torch head generally needs to be positioned in the normal direction to a specified straight line or arc at all times. This function automatically controls the torch head swing control axis (hereinafter referred to as the torch swing axis) to position the torch head in the normal direction to a specified straight line or arc.

For positioning in the normal direction to a straight line, the torch control axis is fed at a constant speed in the normal direction to the straight line according to linear interpolation execution. For positioning in the normal direction to an arc, the torch control axis is positioned in the momentarily changing normal direction to the arc according to circular interpolation execution.

Benefits

- Addition of Torch Swing control for gas cutting process
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R506 | 30i-B Torch Swing for Gas Cutting Machine |
| A02B-0326-R506 | 31i-B5 Torch Swing for Gas Cutting Machine |
| A02B-0327-R506 | 31i-B Torch Swing for Gas Cutting Machine |
| A02B-0353-R506 | 30i-BP Torch Swing for Gas Cutting Machine |
| A02B-0356-R506 | 31i-B5P Torch Swing for Gas Cutting Machine |
| A02B-0357-R506 | 31i-BP Torch Swing for Gas Cutting Machine |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

545

Gas Cutting Machine Functions

Gentle Curve Cutting

Features

With the Gentle Curve Cutting function, if the V-axis is added as an axis parallel to the Y-axis, the V-axis in the gentle curve cutting cancel mode (G13) and a command for the Y-axis alone is assumed to be specified for the V-axis as well and enables movement also on the V-axis.

In the gentle curve cutting mode (G12), a command for the Y-axis is valid for the Y-axis alone and a command for the V-axis is valid for the V-axis alone.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-R504 | 30i-B Gentle Curve Cutting |
| A02B-0326-R504 | 31i-B5 Gentle Curve Cutting |
| A02B-0327-R504 | 31i-B Gentle Curve Cutting |
| A02B-0353-R504 | 30i-BP Gentle Curve Cutting |
| A02B-0356-R504 | 31i-B5P Gentle Curve Cutting |
| A02B-0357-R504 | 31i-BP Gentle Curve Cutting |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

546

Gas Cutting Machine Functions

Corner Control by Feedrate

Features

If a block for cutting feed is followed by another block for cutting feed, the number of accumulated pulses in the automatic acceleration / deceleration circuit of each axis in the block being executed is assumed to be 0 and machining proceeds to the next block when the feedrate being decelerated on each axis with the automatic acceleration / deceleration circuit has decreased to or below the feedrate set in parameter.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-R508 | 30i-B Corner Control by Feedrate |
| A02B-0326-R508 | 31i-B5 Corner Control by Feedrate |
| A02B-0327-R508 | 31i-B Corner Control by Feedrate |
| A02B-0353-R508 | 30i-BP Corner Control by Feedrate |
| A02B-0356-R508 | 31i-B5P Corner Control by Feedrate |
| A02B-0357-R508 | 31i-BP Corner Control by Feedrate |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

547

Gas Cutting Machine Functions

Tool Offset B

Features

With the Tool Offset B function G43H_ or G44H_ command, the tool offset not affected by mirror image can be applied.

With the G49 command, the tool offset can be canceled without being affected by the mirror image. The offset axes are the first axis and second axis for the plane selection.

Benefits

- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-R507 | 30i-B Tool Position Offset B |
| A02B-0326-R507 | 31i-B5 Tool Position Offset B |
| A02B-0327-R507 | 31i-B Tool Position Offset B |
| A02B-0353-R507 | 30i-BP Tool Offset B |
| A02B-0356-R507 | 31i-B5P Tool Offset B |
| A02B-0357-R507 | 31i-BP Tool Offset B |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

548

Gas Cutting Machine Functions

Gap Control

Features

On machines which are equipped with a distance measurement sensor, the Gap Control function controls the motion of the Z-axis to keep the distance between sensor and workpiece constant.

An Analog Input Module of I/O Link is necessary to use this function.

Benefits

- Improve the quality of the cutting edge

Ordering Information

| Specification | Description |
|----------------|----------------------|
| A02B-0323-R636 | 30i-B Gap Control |
| A02B-0326-R636 | 31i-B5 Gap Control |
| A02B-0327-R636 | 31i-B Gap Control |
| A02B-0328-R636 | FS 32i-B Gap Control |
| A02B-0340-R636 | 0i-MF Gap Control |
| A02B-0350-R636 | 0i-MFP Gap Control |
| A02B-0353-R636 | 30i-BP Gap Control |
| A02B-0356-R636 | 31i-B5P Gap Control |
| A02B-0357-R636 | 31i-BP Gap Control |
| A02B-0358-R636 | 32i-BP Gap Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

549

Functions

Editing Operation

This section of the catalogue contains the functions related to the Editing Operations on the CNC.

Some of the functions detailed in the catalogue:

- Size of parts program
- Number of programs
- Encryption
- Background editing
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

550

Editing Operation

Part Program Storage Size

Features

The Part Program Storage is the amount of space available for the operator or user of the CNC to store CNC Part Programs.

The size of the program memory can be incremented to up to 8MB, depending on the CNC model.

Refer to the ordering information table for the sizes available.

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-J944 | 30i-B Part Program Memory, 128 kB |
| A02B-0323-J945 | 30i-B Part Program Memory, 256 kB |
| A02B-0323-J946 | 30i-B Part Program Memory, 512 kB |
| A02B-0323-J947 | 30i-B Part Program Memory, 1 MB |
| A02B-0323-J948 | 30i-B Part Program Memory, 2 MB |
| A02B-0323-J949 | 30i-B Part Program Memory, 4 MB |
| A02B-0323-J959 | 30i-B Part Program Memory, 8 MB |
| A02B-0323-R365 | 30i-B Part Program Memory, 32 MB (CPU Card D) |
| A02B-0326-J944 | 31i-B5 Part Program Memory, 128 kB |
| A02B-0326-J945 | 31i-B5 Part Program Memory, 256 kB |
| A02B-0326-J946 | 31i-B5 Part Program Memory, 512 kB |
| A02B-0326-J947 | 31i-B5 Part Program Memory, 1 MB |
| A02B-0326-J948 | 31i-B5 Part Program Memory, 2 MB |
| A02B-0326-J949 | 31i-B5 Part Program Memory, 4 MB |
| A02B-0326-J959 | 31i-B5 Part Program Memory, 8 MB |
| A02B-0326-R365 | 31i-B5 Part Program Memory, 32 MB (CPU Card D) |
| A02B-0327-J944 | 31i-B Part Program Memory, 128 kB |
| A02B-0327-J945 | 31i-B Part Program Memory, 256 kB |
| A02B-0327-J946 | 31i-B Part Program Memory, 512 kB |
| A02B-0327-J947 | 31i-B Part Program Memory, 1 MB |
| A02B-0327-J948 | 31i-B Part Program Memory, 2 MB |
| A02B-0327-J949 | 31i-B Part Program Memory, 4 MB |
| A02B-0327-J959 | 31i-B Part Program Memory, 8 MB |
| A02B-0327-R365 | 31i-B Part Program Memory, 32 MB (CPU Card D) |
| A02B-0328-J943 | 32i-B Part Program Memory, 64 kB |
| A02B-0328-J944 | 32i-B Part Program Memory, 128 kB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

551

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0328-J945 | 32i-B Part Program Memory, 256 kB |
| A02B-0328-J946 | 32i-B Part Program Memory, 512 kB |
| A02B-0328-J947 | 32i-B Part Program Memory, 1 MB |
| A02B-0328-J948 | 32i-B Part Program Memory, 2 MB |
| A02B-0328-J949 | 32i-B Part Program Memory, 4 MB |
| A02B-0328-J959 | 32i-B Part Program Memory, 8 MB |
| A02B-0333-J943 | 35i-B Part Program Memory, 64 kB |
| A02B-0333-J944 | 35i-B Part Program Memory, 128 kB |
| A02B-0333-J945 | 35i-B Part Program Memory, 256 kB |
| A02B-0333-J946 | 35i-B Part Program Memory, 512 kB |
| A02B-0333-J947 | 35i-B Part Program Memory, 1 MB |
| A02B-0334-J943 | PM i-A Part Program Memory, 64 kB |
| A02B-0334-J944 | PM i-A Part Program Memory, 128 kB |
| A02B-0334-J945 | PM i-A Part Program Memory, 256 kB |
| A02B-0334-J946 | PM i-A Part Program Memory, 512 kB |
| A02B-0334-J947 | PM i-A Part Program Memory, 1 MB |
| A02B-0339-J948 | 0i-TF Part Program Storage Size 2 MB |
| A02B-0340-J948 | 0i-MF Part Program Storage Size 2 MB |
| A02B-0353-J959 | 30i-BP Part Program storage Size 8 MB |
| A02B-0353-R365 | 30i-BP Part Program Memory, 32 MB (CPU CARD G) |
| A02B-0356-J959 | 31i-B5P Part Program storage Size 8 MB |
| A02B-0356-R365 | 31i-B5P Part Program Memory, 32 MB (CPU CARD G) |
| A02B-0357-J959 | 31i-BP Part Program Storage Size 8 MB |
| A02B-0357-R365 | 31i-BP Part Program Memory, 32 MB (CPU CARD G) |
| A02B-0358-J959 | 32i-BP Part Program Storage Size 8 MB |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

552

Editing Operation

Number of Registerable Programs Expansion

Features

The number of registered programs is the total number of programs, subject to the availability of memory space, which can be stored in the CNC. The number varies with the total size of part program storage. The Registered Program Expansion option increases the number of programs according to the table below:

| Part Program Storage Length | Expansion 1 | Expansion 2 |
|-----------------------------|-------------|-------------|
| 64 KByte | 120 | -- |
| 128 KByte | 250 | -- |
| 256 KByte | 500 | -- |
| 512 KByte | 1000 | -- |
| 1MByte | 1000 | 2000 |
| 2MByte | 1000 | 4000 |
| 4MByte | 1000 | 4000 |
| 8MByte | 1000 | 4000 |

Benefits

- Allows better organisation of complex part programs into subroutines
- Quick access to a large number of different programs for shop floor programming

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------|
| A02B-0323-J953 | 30i-B Registered Program Expansion 1, Max. 1000 Programs |
| A02B-0323-J954 | 30i-B Registered Program Expansion 2, Max. 4000 Programs |
| A02B-0326-J953 | 31i-B5 Registered Program Expansion 1, Max. 1000 Programs |
| A02B-0326-J954 | 31i-B5 Registered Program Expansion 2, Max. 4000 Programs |
| A02B-0327-J953 | 31i-B Registered Program Expansion 1, Max. 1000 Programs |
| A02B-0327-J954 | 31i-B Registered Program Expansion 2, Max. 4000 Programs |
| A02B-0328-J953 | 32i-B Registered Program Expansion 1, Max. 1000 Programs |
| A02B-0328-J954 | 32i-B Registered Program Expansion 2, Max. 4000 Programs |
| A02B-0333-J953 | 35i-B Registered Program Expansion 1, Max. 1000 Programs |
| A02B-0334-J953 | PM i-A Registered Program Expansion 1 |
| A02B-0339-J953 | 0i-TF Number of Registered Programs, Expansion 1 |
| A02B-0340-J953 | 0i-MF Number of Registered Programs, Expansion 1 |
| A02B-0353-J954 | 30i-BP Number of Registered Programs Expansion 2 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0356-J954 | 31i-B5P Number of Registered Programs Expansion 2 |
| A02B-0357-J954 | 31i-BP Number of Registered Programs Expansion 2 |
| A02B-0358-J954 | 32i-BP Number of Registered Programs Expansion 2 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

554

Editing Operation

Key and Program Encryption

Features

The Key and Program Encryption function protects part programs from unauthorized use. Program contents can be protected by setting parameters for encryption and for the program security range.

- When the password and security range parameters are specified, the display, editing, and input/output operations are disabled for the programs within the security range.
- The programs in the security range can be encrypted before being output. Once encrypted, the programs cannot be decrypted. In addition, encrypted programs can be input directly.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Increase of the safety and security of the machine operation

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-J778 | 30i-B Key and Program Encryption |
| A02B-0326-J778 | 31i-B5 Key and Program Encryption |
| A02B-0327-J778 | 31i-B Key and Program Encryption |
| A02B-0328-J778 | 32i-B Key and Program Encryption |
| A02B-0339-J778 | 0i-TF Key and Program Encryption |
| A02B-0340-J778 | 0i-MF Key and Program Encryption |
| A02B-0349-J778 | 0i-TFP Key and Program Encryption |
| A02B-0350-J778 | 0i-MFP Key and Program Encryption |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

555

Editing Operation

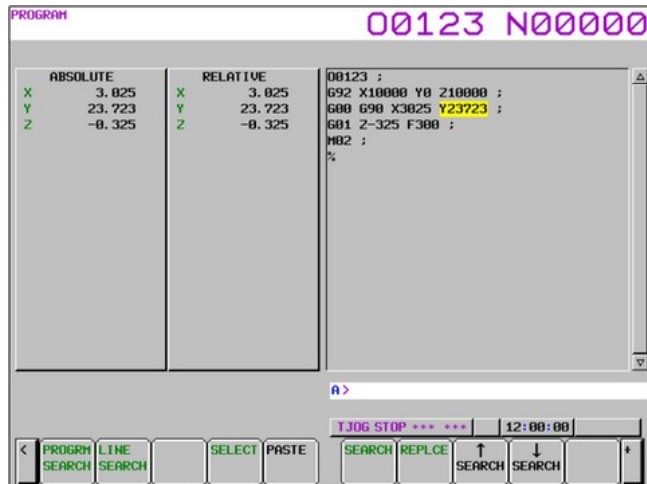

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Playback

Features

Playback is a function that allows the operator to teach the CNC a part program in JOG or HANDLE mode.

In these modes, a machine position along the X, Y and Z axes, obtained by manual operation, is stored in memory as a program position to create a program. The words other than X, Y and Z, which include O, N, G, R, F, C, M, S, T, P, Q, and EOB, can be stored in memory in the same way as in EDIT mode.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Reduce set up time
- Save repeated motions in memory by capturing machine position of manual motions,G,M,S,T can also be added
- Great tool for fixture preparation such as facing a fixture/jaws

Ordering Information

| Specification | Description |
|----------------|-----------------|
| A02B-0323-J879 | 30i-B Playback |
| A02B-0326-J879 | 31i-B5 Playback |
| A02B-0327-J879 | 31i-B Playback |
| A02B-0328-J879 | 32i-B Playback |

556

Editing Operation

Machining Time Stamp

Features

The execution times of the most recently executed ten programs can be displayed in hours, minutes, and seconds.

The calculated machining time can be inserted as a comment of the program to check the machining time on the program directory screen.

Run Hour and Parts Count Display Function is required.

Benefits

- Simplification of production efficiency tracking

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-J964 | 30i-B Machine Time Stamp |
| A02B-0326-J964 | 31i-B5 Machine Time Stamp |
| A02B-0327-J964 | 31i-B Machine Time Stamp |
| A02B-0328-J964 | 32i-B Machining Time Stamp |
| A02B-0339-J964 | 0i-TF Machining Time Stamp |
| A02B-0340-J964 | 0i-MF Machining Time Stamp |
| A02B-0349-J964 | 0i-TFP Machining Time Stamp |
| A02B-0350-J964 | 0i-MFP Machining Time Stamp |
| A02B-0353-J964 | 30i-BP Machining Time Stamp |
| A02B-0356-J964 | 31i-B5P Machining Time Stamp |
| A02B-0357-J964 | 31i-BP Machining Time Stamp |
| A02B-0358-J964 | 32i-BP Machining Time Stamp |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

557

Editing Operation

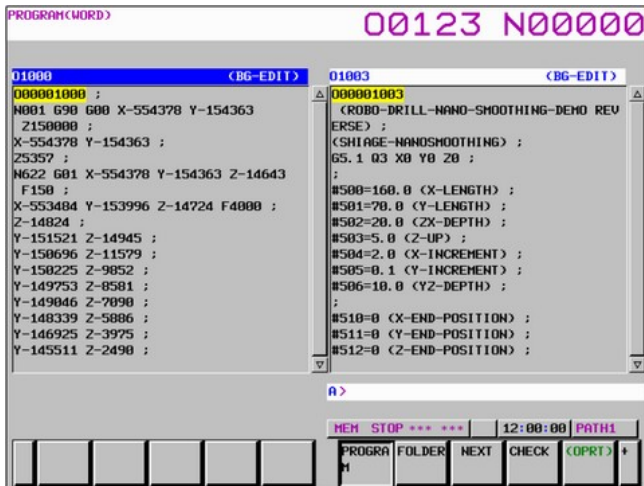

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Background Editing

Features

While a program is being executed, another program may be edited. Such an edit operation is called Background Editing (BG editing). Background Editing can be performed in exactly the same way as ordinary editing (foreground editing).

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Edit part programs, other than the currently active program, while the machine tool is operating
- Non-active part programs for future jobs may be safely edited in background on the CNC while the machine tool is running the production program in foreground

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------|
| A02B-0323-J956 | 30i-B Multi-Part Program Editing (Background Editing) |
| A02B-0326-J956 | 31i-B5 Multi-Part Program Editing (Background Editing) |
| A02B-0327-J956 | 31i-B Multi-Part Program Editing (Background Editing) |
| A02B-0328-J956 | 32i-B Multi-Part Program Editing (Background Editing) |

558

Editing Operation

Memory Card Program Entry Count Extension

Features

This function extends the number of part programs and folders that may be formatted onto a memory card for direct operation and/or editing. The standard allowance of 63 programs and folders may be extended up to a maximum of 1000.

This feature is only used when the PC Tool for Memory Card Program Operation/ Editing software is used to format part program text files to a memory card, for use via the PCMCIA card slot. This feature is not applicable when using the memory card for basic READ, PUNCH or DNC operations with part programs or input/output of maintenance files.

Benefits

- Allows up to 1000 folders and programs to be used.
- Use of folders can greatly assist organization of files on memory card

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------|
| A02B-0323-S995 | 30i-B Memory Card Program, Entry Count Extension, Max. 1000 Programs |
| A02B-0326-S995 | 31i-B5 Memory Card Program, Entry Count Extension, Max. 1000 Programs |
| A02B-0327-S995 | 31i-B Memory Card Program, Entry Count Extension, Max. 1000 Programs |
| A02B-0328-S995 | 32i-B Memory Card Program, Entry Count Extension, Max. 1000 Programs |
| A02B-0339-S995 | 0i-TF Memory Card Program Entry Count Extension |
| A02B-0340-S995 | 0i-MF Memory Card Program Entry Count Extension |
| A02B-0349-S995 | 0i-TFP Memory Card Program Entry Count Extension |
| A02B-0350-S995 | 0i-MFP Memory Card Program Entry Count Extension |
| A02B-0353-S995 | 30i-BP Memory Card Program Entry Count Extension |
| A02B-0356-S995 | 31i-B5P Memory Card Program Entry Count Extension |
| A02B-0357-S995 | 31i-BP Memory Card Program Entry Count Extension |
| A02B-0358-S995 | 32i-BP Memory Card Program Entry Count Extension |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

559

Editing Operation

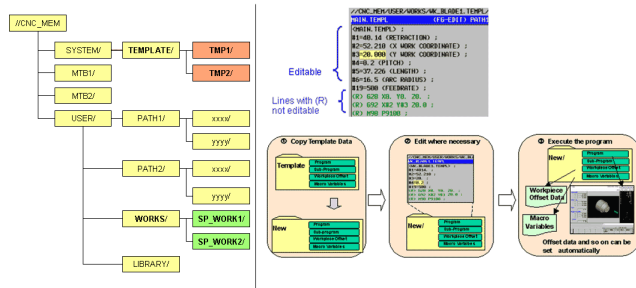

Template Program Function

Features

The Machining Data Management Function management function provides the following features:

- Easy and Fast Creation of Complex Part Programs
- Combination of Machining Data and Part Programs

Manages program data such as

- Offsets
- Parameter
- Macro Variables
- Program Template

Folder based program structure

- Template Folder
- Machining Folder

Adjustable Data

- Parameter (G10 L52; ...)
- Pitch Error Compensation data (G10 L50;...)
- Workpiece Origin Offsets (G10 L20 P...)
 - External workpiece offset (G10 L2 P...)
 - Additional workpiece coordinate system (G10 P0 ...)
- Tool Management Data
 - Modifying, Deleting (G10 L75 P...)
 - Register, Modify, Delete Cartridge Management Table (G10 L76 P...)
 - Offset data for Lathe and Machining
 - ...
- Custom Macro Variables (#xxx = yyy;)

Remarks

To use this function, the 8-level data protection function is also necessary.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

560

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------|
| A02B-0323-R561 | 30i-B Template Program Function (Machining Data Management Function) |
| A02B-0326-R561 | 31i-B5 Template Program Function (Machining Data Management Function) |
| A02B-0327-R561 | 31i-B Template Program Function (Machining Data Management Function) |
| A02B-0328-R561 | 32i-B Template Program Function (Machining Data Management Function) |
| A02B-0353-R561 | 30i-BP Template Program Function |
| A02B-0356-R561 | 31i-B5P Template Program Function |
| A02B-0357-R561 | 31i-BP Template Program Function |
| A02B-0358-R561 | 32i-BP Template Program Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

561

Editing Operation

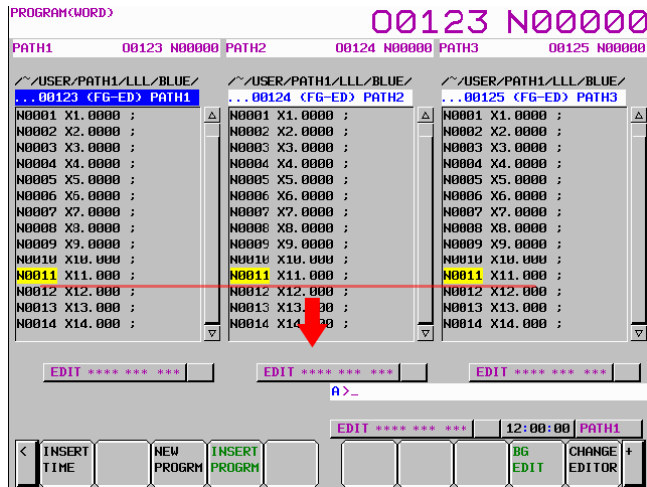

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Multi-Path Editing Function

Features

In the simultaneous multi-path editing function, when the program of selected path is scrolled, other path programs that are displayed on the same screen can be scrolled simultaneously.

In this function, there are the synchronous scroll mode which scrolls all programs simultaneously displayed on the one screen and the single scroll mode which scrolls one program of the selected path. It is possible to switch between the synchronous scroll mode and the single scroll mode by the soft key operation easily.

In a synchronous scroll mode, when the cursor moves to the waiting M-code, the scroll of its path stops automatically until the cursor of the other path move to the same waiting M-code. So it is possible to edit the program confirming the waiting of each path program.

Moreover, the cursor of all paths in simultaneous editing can be moved to specified waiting M-code at a time by synchronous search.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0323-R615 | 30i-B Multi-Path Editing Function |
| A02B-0326-R615 | 31i-B5 Multi-Path Editing Function |
| A02B-0327-R615 | 31i-B Multi-Path Editing Function |
| A02B-0328-R615 | 32i-B Multi-Path Editing Function |
| A02B-0339-R615 | 0i-TF Multi-Path Editing Function |
| A02B-0340-R615 | 0i-MF Multi-Path Editing Function |
| A02B-0349-R615 | 0i-TFP Multi-Path Editing Function |
| A02B-0350-R615 | 0i-MFP Multi-Path Editing Function |
| A02B-0353-R615 | 30i-BP Multi-Path Editing Function |
| A02B-0356-R615 | 31i-B5P Multi-Path Editing Function |
| A02B-0357-R615 | 31i-BP Multi-Path Editing Function |
| A02B-0358-R615 | 32i-BP Multi-Path Editing Function |

562

Editing Operation

High-Speed Program Management

Features

The High-Speed Program Management function can be used to ease the work when the operator is working on many machining programs at the same time.

The function allows to save all programs at once as it also allows to erase all the programs.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Addition of the "All" function to the save or erase function
- Simplification of the programming
- Improvement of the overall machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-R647 | 30i-B High-Speed Program Management |
| A02B-0326-R647 | 31i-B5 High-Speed Program Management |
| A02B-0327-R647 | 31i-B High-Speed Program Management |
| A02B-0328-R647 | 32i-B High-Speed Program Management |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

563

Editing Operation

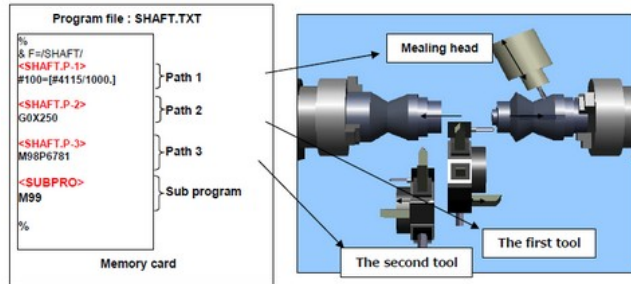

Example of complex machining center (One milling head and two tool posts)

Multi-Path Program Management Function

Features

The multi-path lathe and the complex machine that have several turrets or heads machine workpieces using two or more machining programs. With this function, multi-path programs, offset data, and parameters, etc. for one part machining are managed together by a folder.

In addition, batch creation, batch selection, simultaneous editing and batch Input / Output of the programs are enabled. As a result, this function makes it easy to handle such multi-path programs.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R684 | 30i-B Multi-Path Program Management Function |
| A02B-0326-R684 | 31i-B5 Multi-Path Program Management Function |
| A02B-0327-R684 | 31i-B Multi-Path Program Management Function |
| A02B-0328-R684 | 32i-B Multi-Path Program Management Function |
| A02B-0353-R684 | 30i-BP Multi-Path Program Management Function |
| A02B-0356-R684 | 31i-B5P Multi-Path Program Management Function |
| A02B-0357-R684 | 31i-BP Multi-Path Program Management Function |
| A02B-0358-R684 | 32i-BP Multi-Path Program Management Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

564

Editing Operation

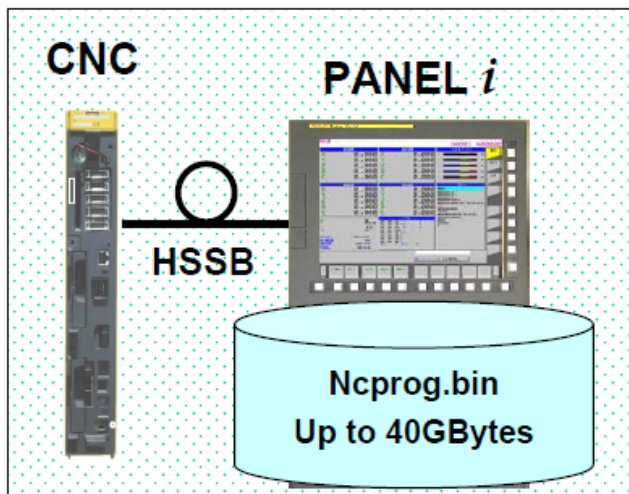

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Program Operation on Large Capacity Memory

Features

Program Operation on Large Capacity Memory enables you to execute programs stored on a hard disk (HDD) or solid state disk (SSD) of a PANEL i, PANEL iH Pro or PC connected to the CNC by HSSB. Programs are stored in a program storage file (Ncprog.bin) on the HDD/SSD. The max. size of a program storage file is 40 GB. You can store up to 1000 programs in one program storage file.

The function supports Memory operation, DNC operation and M198 operation.

Benefits

- Utilize mass storage devices on PANEL i, PANEL iH Pro and PC
- Handle multiple large programs easily

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0207-J817 | Program Operation on Large Capacity Memory |

565

Functions

Setting and Display

This section of the catalogue contains the functions related to Display Functions which the CNC to display more than just the basic machine information.

Some of the functions detailed in the catalogue:

- Languages
- Machine operation menus
- Protection of data
- Graphic functions
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

566

Setting and Display

Run Hour and Parts Count Display

Features

With the Run Hour and Parts Count Display function, various run times, the total number of machined parts, number of parts required, and number of machined parts can be displayed.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Easy shop floor data management

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-J971 | 30i-B Run Hour & Parts Count Display |
| A02B-0326-J971 | 31i-B5 Run Hour & Parts Count Display |
| A02B-0327-J971 | 31i-B Run Hour & Parts Count Display |
| A02B-0328-J971 | 32i-B Run Hour & Parts Count Display |




Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

567

Setting and Display

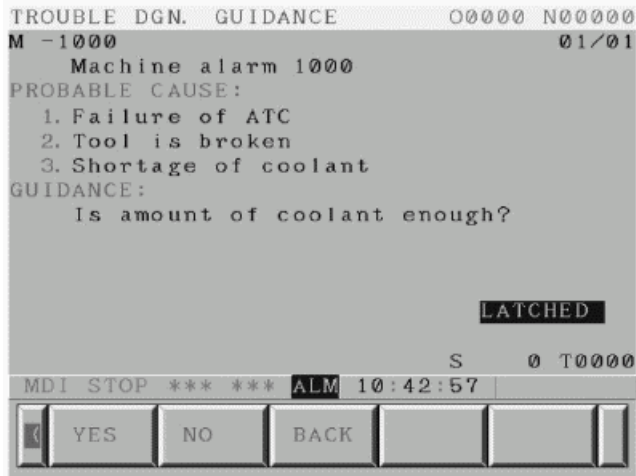

Machine Alarm Diagnosis

Features

Machine alarms (External alarm messages and Macro alarms) can be diagnosed on the a specific trouble diagnosis guidance screen in addition to the CNC alarms.

The following alarms can be diagnosed:

- External alarm message (Alarm No.1000-1999)
- Macro alarm (#3000) (Alarm No.3000-3200)

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F Plus (Type 0).

Guidance tables for diagnosis of machine alarms are made with Mircrosoft Excel sheet which is provided by FANUC.

Alarm No., Classified code, Alarm message, Probable cause and etc. are registered into a guidance table (1).

| [Guidance Table (1)] | | | | | | | | | |
|----------------------|-----------|-----------------|--------|---------------|----------------|--------|--------|------------|------------|
| No. | Alarm No. | Classified code | | Alarm message | Probable cause | | | Message ID | (Reserved) |
| | | Code 1 | Code 2 | | Line 1 | Line 2 | Line 3 | | |
| 1 | | | | | | | | | |
| 2 | | | | | | | | | |
| 3 | | | | | | | | | |

"Guidance message" is registered into a guidance table (2).

"Guidance message" is a question and an instruction to an operator.

| [Guidance Table (2)] | | | | | |
|----------------------|------------|------------------|-----------------|----|---------|
| No. | Message ID | Guidance message | Next message ID | | Comment |
| | | | YES | NO | |
| 1 | | | | | |
| 2 | | | | | |
| 3 | | | | | |

Benefits

- Possibility to create a performant and assisted alarm diagnostic system for the CNC
- Reduction of the time required to diagnose the problem
- Improves machining productivity

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

568

Ordering Information

| Specification | Description |
|----------------|--------------------------------|
| A02B-0323-S813 | 30i-B Machine Alarm Diagnosis |
| A02B-0326-S813 | 31i-B5 Machine Alarm Diagnosis |
| A02B-0327-S813 | 31i-B Machine Alarm Diagnosis |
| A02B-0328-S813 | 32i-B Machine Alarm Diagnosis |
| A02B-0333-S813 | 35i-B Machine Alarm Diagnosis |
| A02B-0334-S813 | PM i-A Machine Alarm Diagnosis |
| A02B-0339-S813 | 0i-TF Machine Alarm Diagnoses |
| A02B-0340-S813 | 0i-MF Machine Alarm Diagnoses |
| A02B-0349-S813 | 0i-TFP Machine Alarm Diagnosis |
| A02B-0350-S813 | 0i-MFP Machine Alarm Diagnosis |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

569

Setting and Display

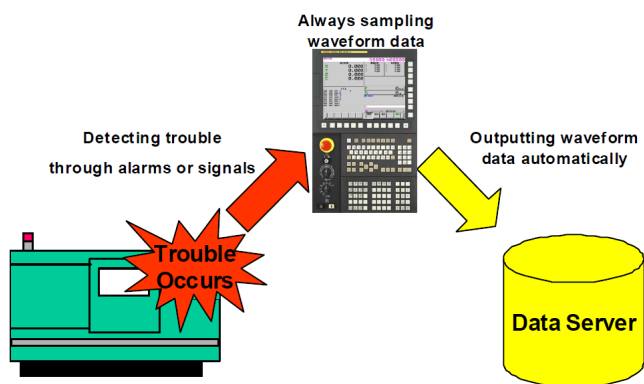

Servo/Spindle Waveform Data Output Function

Features

If a failure occurs on a machine, with this function servo and spindle waveform data is automatically output to the data server. Waveform data before and after the failure event is saved, making it easier to detect the cause of the failure. This function also facilitates the application of remote service software.

Note

The data server function is required to use this function.

Benefits

- Reduces downtime and service costs

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R588 | 30i-B Servo / Spindle Waveform Data Output Function |
| A02B-0326-R588 | 31i-B5 Servo / Spindle Waveform Data Output Function |
| A02B-0327-R588 | 31i-B Servo / Spindle Waveform Data Output Function |
| A02B-0328-R588 | 32i-B Servo / Spindle Waveform Data Output Function |
| A02B-0339-R588 | 0i-TF Servo / Spindle Waveform Data Output Function |
| A02B-0340-R588 | 0i-MF Servo / Spindle Waveform Data Output Function |
| A02B-0349-R588 | 0i-TFP Servo / Spindle Waveform Data Output Function |
| A02B-0350-R588 | 0i-MFP Servo / Spindle Waveform Data Output Function |
| A02B-0353-R588 | 30i-BP Servo / Spindle Waveform Data Output Function |
| A02B-0356-R588 | 31i-B5P Servo / Spindle Waveform Data Output Function |
| A02B-0357-R588 | 31i-BP Servo / Spindle Waveform Data Output Function |
| A02B-0358-R588 | 32i-BP Servo / Spindle Waveform Data Output Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

570

Setting and Display

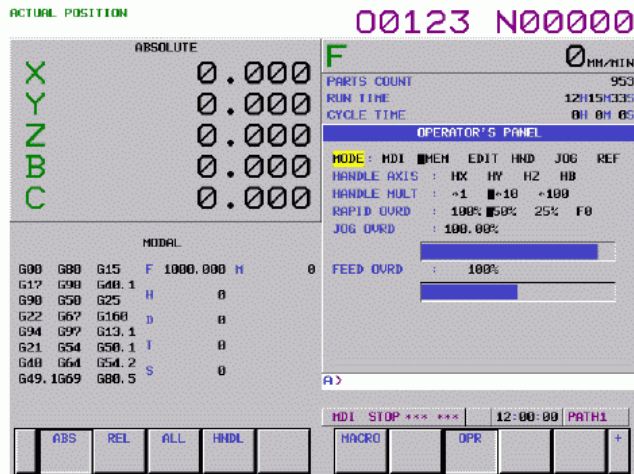

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Software Operator's Panel

Features

The functions of switches on the machine operator's panel are made available by using the MDI panel. This means that functions such as a mode selection and selection of jog feedrate override can be made by operating the MDI panel, so corresponding switches on the machine operator's panel need not be used.

This function is enabled only when the software operator's panel screen is displayed. The user can make selection operations by moving the cursor by using the cursor keys while checking the screen.

The following functions can be performed:

- A : Mode selection
- B : Selection of jog feed axis, manual rapid traverse
- C : Selection of manual pulse generator feed axis, selection of manual pulse magnification
- D : Jog federate, federate override, rapid traverse override
- E : Optional block skip, single block, machine lock, dry run
- F : Protect key
- G : Feed hold
- H : General purpose switch

A parameter that enables and disables MDI operations is provided for each of operation groups A to G indicated above.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------|
| A02B-0323-J960 | 30i-B Software Operator's Panel |
| A02B-0326-J960 | 31i-B5 Software Operator's Panel |
| A02B-0327-J960 | 31i-B Software Operator's Panel |
| A02B-0328-J960 | 32i-B Software Operator's Panel |

571

Setting and Display

OPERATOR'S PANEL

| | | |
|---------------|---------|----|
| OVR信号1 | : ■ OFF | ON |
| | : ■ OFF | ON |
| | : ■ OFF | ON |
| | : ■ OFF | ON |
| | : ■ OFF | ON |
| | : ■ OFF | ON |
| | : ■ OFF | ON |
| | : ■ OFF | ON |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Software Operator's Panel General Purpose Switch

Features

This function allows the user to assign arbitrary signals to general purpose switches 1 to 16 on the software operator's panel.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits


- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------|
| A02B-0323-J961 | 30i-B Software Operator's Panel General Purpose Switch |
| A02B-0326-J961 | 31i-B5 Software Operator's Panel General Purpose Switch |
| A02B-0327-J961 | 31i-B Software Operator's Panel General Purpose Switch |
| A02B-0328-J961 | 32i-B Software Operator's Panel General Purpose Switch |

572

Setting and Display

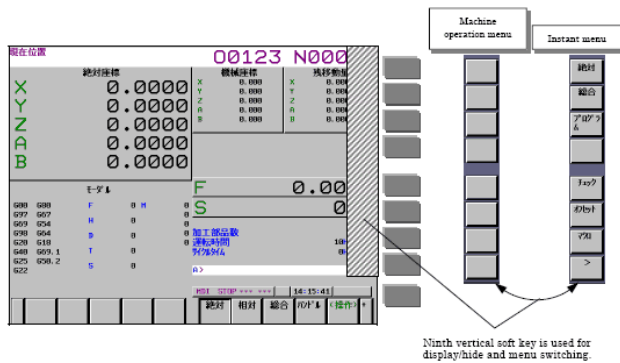

Machine Operation Menu

Features


Machine Operation Menu Function

The soft keys displayed on the standard CNC screen can be used as menu keys for the machine operation.

The soft keys can be customized easily by the machine tool builder. A menu can have a hierarchy, and the indication of each soft key can be specified.

Customization data is created as a machine operation menu definition file and is stored in the CNC.

Machine Operation Menu Tool

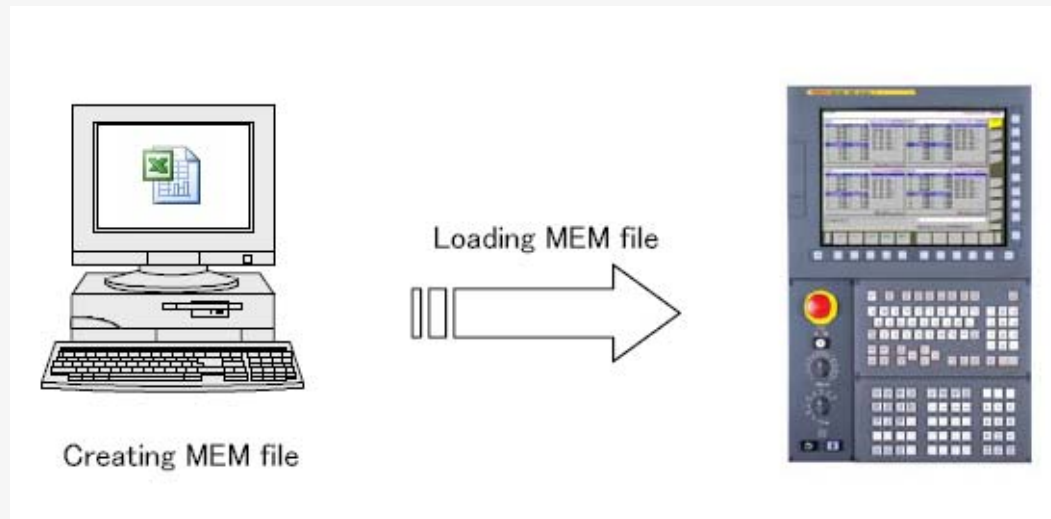

When using the "Machine Operation Menu" making tool it is possible to define the machine operation menu and output the defined contents as MEM file.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0323-S844 | 30i-B Machine Operation Menu |
| A02B-0326-S844 | 31i-B5 Machine Operation Menu |
| A02B-0327-S844 | 31i-B Machine Operation Menu |
| A02B-0328-S844 | 32i-B Machine Operation Menu |
| A02B-0339-S844 | 0i-TF Machine Operation Menu |
| A02B-0340-S844 | 0i-MF Machine Operation Menu |
| A02B-0349-S844 | 0i-TFP Machine Operation Menu |
| A02B-0350-S844 | 0i-MFP Machine Operation Menu |
| A02B-0353-S844 | 30i-BP Machine Operation Menu Function |
| A02B-0356-S844 | 31i-B5P Machine Operation Menu Function |
| A02B-0357-S844 | 31i-BP Machine Operation Menu Function |
| A02B-0358-S844 | 32i-BP Machine Operation Menu Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

574

Setting and Display

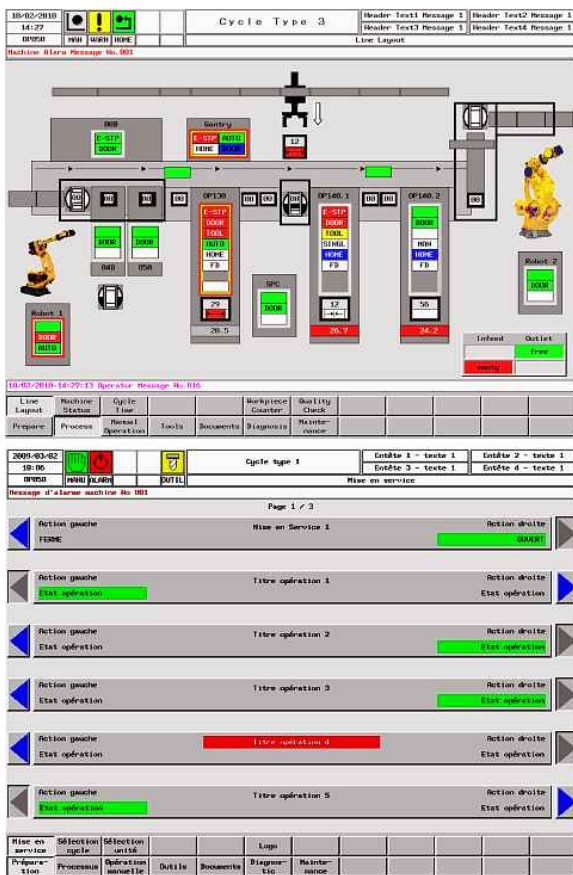

FANUC Auto HMI-NC

Features

FANUC Auto HMI-NC is an application composed of a set of HMI templates, objects, tables and scripts to create standardized user interfaces in automotive applications or machining applications producing large batches of products.

Typical screens are provided such as workpiece counters; tool life overview; manual operations etc. are available. The screens are multilingual and can be easily customized and supplemented by the machine manufacturer.

FANUC Auto HMI-NC is based on FANUC PICTURE. The main target of this application is to visualize the detailed status of a single machine, but also to provide on each machine a view and general information about the production line. It supports the 15 inch Display Station for Automotive as well as the 15" and 10" Touch Panel LCD displays.

The FANUC Auto HMI-NC application runs directly in the CNC, and is designed for 'passive' LCD displays (10.4 inch and 15 inch). The whole HMI system is cost effective and extremely reliable.

FANUC Auto HMI-NC has been developed to meet the requirements of standardization of operation of automotive machining plants and high volume production lines. This application contains a basic set of standardized HMI screens as well as libraries of objects based on "FANUC PICTURE".

Typical screens available:

- Power-On Conditions
- Line Layout
- Shift Counter
- Tool Lifetime
- Maintenance Menu
- Cycle Type Selection
- Machine Status
- Manual Operations
- Diagnosis Menu

'FANUC Auto HMI-NC' supports multi-language, with immediate switching between the languages. It can also be switched automatically with the language selected in the CNC. English is always available for maintenance reasons, one language for the end-user and one language for the machine builder / integrator. Language tables are easy to update and provide to external translation companies through the export-import functions.

The Machine Builder or Integrator can develop its own screens to match his application requirements, based on templates and library of objects provided. In this case, FANUC PICTURE package is required. Animated objects, alarms or any data used in the FANUC Auto HMI-NC are mapped in PMC data tables for easy integration with the CNC.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Benefits

- No PC hardware used, no Hard-Disk, No Windows® operating system, absolute virus immunity
- Screens and HMI located in the CNC - No operating system to maintain in the display
- Customizable through FANUC PICTURE
- Plug and Play display - easy to maintain
- No particular boot and shutdown procedure of the CNC, HMI and display

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0323-R572 | 30i-B FANUC Auto HMI-NC |
| A02B-0326-R572 | 31i-B5 FANUC Auto HMI-NC |
| A02B-0327-R572 | 31i-B FANUC Auto HMI-NC |
| A02B-0328-R572 | 32i-B FANUC Auto HMI-NC |
| A02B-0333-R572 | 35i-B FANUC Auto HMI-NC |
| A02B-0334-R572 | PM i-A FANUC Auto HMI-NC |
| A02B-0339-R572 | 0i-TF FANUC Auto HMI-NC |
| A02B-0340-R572 | 0i-MF FANUC Auto HMI-NC |
| A02B-0349-R572 | 0i-TFP FANUC Auto HMI-NC |
| A02B-0350-R572 | 0i-MFP FANUC Auto HMI-NC |
| A02B-0353-R572 | 30i-BP FANUC Auto HMI-NC |
| A02B-0356-R572 | 31i-B5P FANUC Auto HMI-NC |
| A02B-0357-R572 | 31i-BP FANUC Auto HMI-NC |
| A02B-0358-R572 | 32i-BP FANUC Auto HMI-NC |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

576

Setting and Display

FANUC Auto HMI-NC Screen Enhancement 1

Features

With FANUC Auto HMI-NC Screen Enhancement 1, the following screens are additionally available in FANUC Auto HMI-NC:

- Type pre-selection
- Campaign validation
- Part program check
- Work piece
- Campaign control
- Tool offset
- Machine alarm (with detail message)
- Faults history (with output history)
- FL-net diagnosis
- PROFINET IO diagnosis
- EtherNet/IP diagnosis
- Power consumption monitor

Benefits

- Customizable through FANUC PICTURE
- Plug and Play display - easy to maintain

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R653 | 30i-B FANUC Auto HMI-NC, Screen Enhancement 1 |
| A02B-0326-R653 | 31i-B5 FANUC Auto HMI-NC, Screen Enhancement 1 |
| A02B-0327-R653 | 31i-B FANUC Auto HMI-NC, Screen Enhancement 1 |
| A02B-0328-R653 | 32i-B FANUC Auto HMI-NC, Screen Enhancement 1 |
| A02B-0333-R653 | 35i-B FANUC Auto HMI-NC, Screen Enhancement 1 |
| A02B-0334-R653 | PM i-A FANUC Auto HMI-NC, Screen Enhancement 1 |
| A02B-0339-R653 | 0i-TF FANUC Auto HMI-NC Screen Enhancement 1 |
| A02B-0340-R653 | 0i-MF FANUC Auto HMI-NC Screen Enhancement 1 |
| A02B-0349-R653 | 0i-TFP FANUC Auto HMI-NC Screen Enhancement 1 |
| A02B-0350-R653 | 0i-MFP FANUC Auto HMI-NC Screen Enhancement 1 |
| A02B-0353-R653 | 30i-BP FANUC Auto HMI-NC Screen Enhancement 1 |
| A02B-0356-R653 | 31i-B5P FANUC Auto HMI-NC Screen Enhancement 1 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

577

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0357-R653 | 31i-BP FANUC Auto HMI-NC Screen Enhancement 1 |
| A02B-0358-R653 | 32i-BP FANUC Auto HMI-NC Screen Enhancement 1 |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

578

Setting and Display

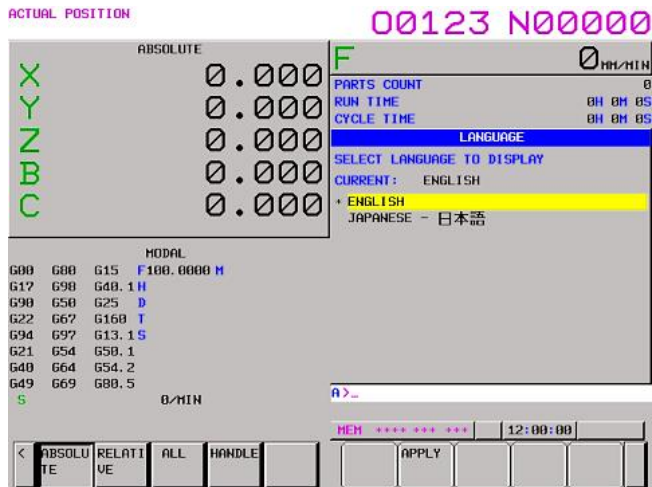

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Multi-Language Display

Features

The Multi-Language Display is the language that is used for user guidance on the CNC.

The user can switch the operator language without restart of the control.

Selection of Five Optional Languages

CNC system provides many optional languages for the display screens. This function allows the selection of up to five languages according to the parameter among the optional language stored in CNC system. These selected languages and English can be displayed.

Refer to the ordering information table for the available languages.

Benefits

- Simplifies the operation of the machine in languages other than English
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------|
| A02B-0323-J650 | 30i-B Danish Language Display |
| A02B-0323-J678 | 30i-B Portuguese Language Display |
| A02B-0323-J962 | 30i-B Dutch Language Display |
| A02B-0323-J965 | 30i-B Japanese Language Display |
| A02B-0323-J967 | 30i-B Chinese Language Display, Traditional Characters |
| A02B-0323-J968 | 30i-B Italian Language Display |
| A02B-0323-J969 | 30i-B Korean Language Display |
| A02B-0323-J970 | 30i-B Spanish Language Display |
| A02B-0323-R320 | 30i-B Multi-Language Display Slovenian |
| A02B-0323-R587 | 30i-B Turkish Language Display |
| A02B-0323-R686 | 30i-B Bulgarian Language Display |
| A02B-0323-R693 | 30i-B Slovakian Language Display |
| A02B-0323-R694 | 30i-B Romanian Language Display |
| A02B-0323-R726 | 30i-B Multi-Language Display - Finnish |
| A02B-0323-S689 | 30i-B Czech Language Display |

| Specification | Description |
|----------------|----------------------------------------------------------------|
| A02B-0323-S690 | 30i-B Hungarian Language Display |
| A02B-0323-S691 | 30i-B Swedish Language Display |
| A02B-0323-S739 | 30i-B Polish Language Display |
| A02B-0323-S829 | 30i-B Chinese Language Display, Simplified Chinese Characters |
| A02B-0323-S839 | 30i-B German Language Display |
| A02B-0323-S841 | 30i-B French Language Display |
| A02B-0323-S849 | 30i-B Russian Language Display |
| A02B-0326-J650 | 31i-B5 Danish Language Display |
| A02B-0326-J678 | 31i-B5 Portuguese Language Display |
| A02B-0326-J962 | 31i-B5 Dutch Language Display |
| A02B-0326-J965 | 31i-B5 Japanese Language Display |
| A02B-0326-J967 | 31i-B5 Chinese Language Display, Traditional Characters |
| A02B-0326-J968 | 31i-B5 Italian Language Display |
| A02B-0326-J969 | 31i-B5 Korean Language Display |
| A02B-0326-J970 | 31i-B5 Spanish Language Display |
| A02B-0326-R320 | 31i-B5 Multi-Language Display Slovenian |
| A02B-0326-R587 | 31i-B5 Turkish Language Display |
| A02B-0326-R686 | 31i-B5 Bulgarian Language Display |
| A02B-0326-R693 | 31i-B5 Slovakian Language Display |
| A02B-0326-R694 | 31i-B5 Romanian Language Display |
| A02B-0326-R726 | 31i-B5 Multi-Language Display - Finnish |
| A02B-0326-S689 | 31i-B5 Czech Language Display |
| A02B-0326-S690 | 31i-B5 Hungarian Language Display |
| A02B-0326-S691 | 31i-B5 Swedish Language Display |
| A02B-0326-S739 | 31i-B5 Polish Language Display |
| A02B-0326-S829 | 31i-B5 Chinese Language Display, Simplified Chinese Characters |
| A02B-0326-S839 | 31i-B5 German Language Display |
| A02B-0326-S841 | 31i-B5 French Language Display |
| A02B-0326-S849 | 31i-B5 Russian Language Display |
| A02B-0327-J650 | 31i-B Danish Language Display |
| A02B-0327-J678 | 31i-B Portuguese Language Display |
| A02B-0327-J962 | 31i-B Dutch Language Display |
| A02B-0327-J965 | 31i-B Japanese Language Display |
| A02B-0327-J967 | 31i-B Chinese Language Display, Traditional Characters |
| A02B-0327-J968 | 31i-B Italian Language Display |
| A02B-0327-J969 | 31i-B Korean Language Display |
| A02B-0327-J970 | 31i-B Spanish Language Display |
| A02B-0327-R320 | 31i-B Multi-Language Display Slovenian |
| A02B-0327-R587 | 31i-B Turkish Language Display |
| A02B-0327-R686 | 31i-B Bulgarian Language Display |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0327-R693 | 31i-B Slovakian Language Display |
| A02B-0327-R694 | 31i-B Romanian Language Display |
| A02B-0327-R726 | 31i-B Multi-Language Display - Finnish |
| A02B-0327-S689 | 31i-B Czech Language Display |
| A02B-0327-S690 | 31i-B Hungarian Language Display |
| A02B-0327-S691 | 31i-B Swedish Language Display |
| A02B-0327-S739 | 31i-B Polish Language Display |
| A02B-0327-S829 | 31i-B Chinese Language Display, Simplified Chinese Characters |
| A02B-0327-S839 | 31i-B German Language Display |
| A02B-0327-S841 | 31i-B French Language Display |
| A02B-0327-S849 | 31i-B Russian Language Display |
| A02B-0328-J650 | 32i-B Danish Language Display |
| A02B-0328-J678 | 32i-B Portuguese Language Display |
| A02B-0328-J962 | 32i-B Dutch Language Display |
| A02B-0328-J965 | 32i-B Japanese Language Display |
| A02B-0328-J967 | 32i-B Chinese Language Display, Traditional Characters |
| A02B-0328-J968 | 32i-B Italian Language Display |
| A02B-0328-J969 | 32i-B Korean Language Display |
| A02B-0328-J970 | 32i-B Spanish Language Display |
| A02B-0328-R320 | 32i-B Multi-Language Display Slovenian |
| A02B-0328-R587 | 32i-B Turkish Language Display |
| A02B-0328-R686 | 32i-B Bulgarian Language Display |
| A02B-0328-R693 | 32i-B Slovakian Language Display |
| A02B-0328-R694 | 32i-B Romanian Language Display |
| A02B-0328-R726 | 32i-B Multi-Language Display - Finnish |
| A02B-0328-S689 | 32i-B Czech Language Display |
| A02B-0328-S690 | 32i-B Hungarian Language Display |
| A02B-0328-S691 | 32i-B Swedish Language Display |
| A02B-0328-S739 | 32i-B Polish Language Display |
| A02B-0328-S829 | 32i-B Chinese Language Display, Simplified Chinese Characters |
| A02B-0328-S839 | 32i-B German Language Display |
| A02B-0328-S841 | 32i-B French Language Display |
| A02B-0328-S849 | 32i-B Russian Language Display |
| A02B-0333-J650 | 35i-B Multi-Language Display - Danish |
| A02B-0333-J678 | 35i-B Multi-Language Display - Portuguese |
| A02B-0333-J962 | 35i-B Multi-Language Display - Dutch |
| A02B-0333-J967 | 35i-B Multi-Language Display - Chinese (Traditional Chinese Characters) |
| A02B-0333-J968 | 35i-B Multi-Language Display - Italian |
| A02B-0333-J969 | 35i-B Multi-Language Display - Korean |
| A02B-0333-J970 | 35i-B Multi-Language Display - Spanish |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|------------------------------------------------------------------------|
| A02B-0333-R320 | 35i-B Multi-Language Display - Slovenian |
| A02B-0333-R587 | 35i-B Multi-Language Display - Turkish |
| A02B-0333-R686 | 35i-B Multi-Language Display - Bulgarian |
| A02B-0333-R693 | 35i-B Multi-Language Display - Slovak |
| A02B-0333-R694 | 35i-B Multi-Language Display - Rumanian |
| A02B-0333-R726 | 35i-B Multi-Language Display - Finnish |
| A02B-0333-S689 | 35i-B Multi-Language Display - Czech |
| A02B-0333-S690 | 35i-B Multi-Language Display - Hungarian |
| A02B-0333-S691 | 35i-B Multi-Language Display - Swedish |
| A02B-0333-S739 | 35i-B Multi-Language Display - Polish |
| A02B-0333-S829 | 35i-B Multi-Language Display - Chinese (Simplified Chinese Characters) |
| A02B-0333-S839 | 35i-B Multi-Language Display - German |
| A02B-0333-S841 | 35i-B Multi-Language Display - French |
| A02B-0333-S849 | 35i-B Multi-Language Display - Russian |
| A02B-0334-J650 | PM i-A Danish Language Display |
| A02B-0334-J678 | PM i-A Portuguese Language Display |
| A02B-0334-J962 | PM i-A Dutch Language Display |
| A02B-0334-J967 | PM i-A Chinese Language Display |
| A02B-0334-J968 | PM i-A Italian Language Display |
| A02B-0334-J969 | PM i-A Korean Language Display |
| A02B-0334-J970 | PM i-A Spanish Language Display |
| A02B-0334-R320 | PM i-A Multi-Language Display Slovenian |
| A02B-0334-R410 | PMi-A Multi-Language Display - Vietnamese |
| A02B-0334-R411 | PMi-A Multi-Language Display - Indonesian |
| A02B-0334-R587 | PM i-A Turkish Language Display |
| A02B-0334-R686 | Multi-Language Display - BULGARIAN |
| A02B-0334-R693 | Multi-Language Display - SLOVAK |
| A02B-0334-R694 | Multi-Language Display - RUMANIAN |
| A02B-0334-R726 | PM i-A Multi-Language Display - Finnish |
| A02B-0334-S689 | PM i-A Czech Language Display |
| A02B-0334-S690 | PM i-A Hungarian Language Display |
| A02B-0334-S691 | PM i-A Swedish Language Display |
| A02B-0334-S739 | PM i-A Polish Language Display |
| A02B-0334-S829 | PM i-A Chinese Language Display, Simplified Chinese Characters |
| A02B-0334-S839 | PM i-A German Language Display |
| A02B-0334-S841 | PM i-A French Language Display |
| A02B-0334-S849 | PM i-A Russian Language Display |
| A02B-0339-J650 | 0i-TF Multi-Language Display Danish |
| A02B-0339-J962 | 0i-TF Multi-Language Display Dutch |
| A02B-0339-J965 | 0i-TF Multi-Language Display Japanese |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0339-J968 | 0i-TF Multi-Language Display Italian |
| A02B-0339-J969 | 0i-TF Multi-Language Display Korean |
| A02B-0339-R320 | 0i-TF Multi-Language Display Slovenian |
| A02B-0339-R686 | 0i-TF Multi-Language Display Bulgarian |
| A02B-0339-R693 | 0i-TF Multi-Language Display Slovak |
| A02B-0339-R694 | 0i-TF Multi-Language Display Romanian |
| A02B-0339-R726 | 0i-TF Multi-Language Display - Finnish |
| A02B-0339-S689 | 0i-TF Multi-Language Display Czech |
| A02B-0339-S690 | 0i-TF Multi-Language Display Hungarian |
| A02B-0339-S691 | 0i-TF Multi-Language Display Swedish |
| A02B-0339-S739 | 0i-TF Multi-Language Display Polish |
| A02B-0339-S839 | 0i-TF Multi-Language Display German |
| A02B-0339-S841 | 0i-TF Multi-Language Display French |
| A02B-0340-J650 | 0i-MF Multi-Language Display Danish |
| A02B-0340-J962 | 0i-MF Multi-Language Display Dutch |
| A02B-0340-J965 | 0i-MF Multi-Language Display Japanese |
| A02B-0340-J968 | 0i-MF Multi-Language Display Italian |
| A02B-0340-J969 | 0i-MF Multi-Language Display Korean |
| A02B-0340-R320 | 0i-MF Multi-Language Display Slovenian |
| A02B-0340-R686 | 0i-MF Multi-Language Display Bulgarian |
| A02B-0340-R693 | 0i-MF Multi-Language Display Slovak |
| A02B-0340-R694 | 0i-MF Multi-Language Display Romanian |
| A02B-0340-R726 | 0i-MF Multi-Language Display - Finnish |
| A02B-0340-S689 | 0i-MF Multi-Language Display Czech |
| A02B-0340-S690 | 0i-MF Multi-Language Display Hungarian |
| A02B-0340-S691 | 0i-MF Multi-Language Display Swedish |
| A02B-0340-S739 | 0i-MF Multi-Language Display Polish |
| A02B-0340-S839 | 0i-MF Multi-Language Display German |
| A02B-0340-S841 | 0i-MF Multi-Language Display French |
| A02B-0349-J650 | 0i-TFP Multi-Language Display: Danish |
| A02B-0349-J962 | 0i-TFP Multi-Language Display: Dutch |
| A02B-0349-J965 | 0i-TFP Multi-Language Display: Japanese |
| A02B-0349-J968 | 0i-TFP Multi-Language Display: Italian |
| A02B-0349-J969 | 0i-TFP Multi-Language Display: Korean |
| A02B-0349-R320 | 0i-TFP Multi-Language Display: Slovenian |
| A02B-0349-R686 | 0i-TFP Multi-Language Display: Bulgarian |
| A02B-0349-R693 | 0i-TFP Multi-Language Display: Slovak |
| A02B-0349-R694 | 0i-TFP Multi-Language Display: Romanian |
| A02B-0349-R726 | 0i-TFP Multi-Language Display - Finnish |
| A02B-0349-S689 | 0i-TFP Multi-Language Display: Czech |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0349-S690 | 0i-TFP Multi-Language Display: Hungarian |
| A02B-0349-S691 | 0i-TFP Multi-Language Display: Swedish |
| A02B-0349-S739 | 0i-TFP Multi-Language Display: Polish |
| A02B-0349-S839 | 0i-TFP Multi-Language Display: German |
| A02B-0349-S841 | 0i-TFP Multi-Language Display: French |
| A02B-0350-J650 | 0i-MFP Multi-Language Display: Danish |
| A02B-0350-J962 | 0i-MFP Multi-Language Display: Dutch |
| A02B-0350-J965 | 0i-MFP Multi-Language Display: Japanese |
| A02B-0350-J968 | 0i-MFP Multi-Language Display: Italian |
| A02B-0350-J969 | 0i-MFP Multi-Language Display: Korean |
| A02B-0350-R320 | 0i-MFP Multi-Language Display: Slovenian |
| A02B-0350-R686 | 0i-MFP Multi-Language Display: Bulgarian |
| A02B-0350-R693 | 0i-MFP Multi-Language Display: Slovak |
| A02B-0350-R694 | 0i-MFP Multi-Language Display: Romanian |
| A02B-0350-R726 | 0i-MFP Multi-Language Display - Finnish |
| A02B-0350-S689 | 0i-MFP Multi-Language Display: Czech |
| A02B-0350-S690 | 0i-MFP Multi-Language Display: Hungarian |
| A02B-0350-S691 | 0i-MFP Multi-Language Display: Swedish |
| A02B-0350-S739 | 0i-MFP Multi-Language Display: Polish |
| A02B-0350-S839 | 0i-MFP Multi-Language Display: German |
| A02B-0350-S841 | 0i-MFP Multi-Language Display: French |
| A02B-0353-J650 | 30i-BP Multi-Language Display - DANISH |
| A02B-0353-J678 | 30i-BP Multi-Language Display - PORTUGUESE |
| A02B-0353-J962 | 30i-BP Multi-Language Display - DUTCH |
| A02B-0353-J965 | 30i-BP Multi-Language Display - JAPANESE |
| A02B-0353-J967 | 30i-BP Multi-Language Display - CHINESE |
| A02B-0353-J968 | 30i-BP Multi-Language Display - ITALIAN |
| A02B-0353-J969 | 30i-BP Multi-Language Display - KOREAN |
| A02B-0353-J970 | 30i-BP Multi-Language Display - SPANISH |
| A02B-0353-R410 | 30i-BP Multi-Language Display - VIETNAMESE |
| A02B-0353-R411 | 30i-BP Multi-Language Display - INDONESIAN |
| A02B-0353-R587 | 30i-BP Multi-Language Display - TURKISH |
| A02B-0353-R686 | 30i-BP Multi-Language Display - BULGARIAN |
| A02B-0353-R693 | 30i-BP Multi-Language Display - SLOVAK |
| A02B-0353-R694 | 30i-BP Multi-Language Display - ROMANIAN |
| A02B-0353-R726 | 30i-BP Multi-Language Display - FINNISH |
| A02B-0353-S689 | 30i-BP Multi-Language Display - CZECH |
| A02B-0353-S690 | 30i-BP Multi-Language Display - HUNGARIAN |
| A02B-0353-S691 | 30i-BP Multi-Language Display - SWEDISH |
| A02B-0353-S739 | 30i-BP Multi-Language Display - POLISH |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0353-S829 | 30i-BP Multi-Language Display - CHINESE (Simplified Characters) |
| A02B-0353-S839 | 30i-BP Multi-Language Display - GERMAN |
| A02B-0353-S841 | 30i-BP Multi-Language Display - FRENCH |
| A02B-0353-S849 | 30i-BP Multi-Language Display - RUSSIAN |
| A02B-0356-J650 | 31i-B5P Multi-Language Display - DANISH |
| A02B-0356-J678 | 31i-B5P Multi-Language Display - PORTUGUESE |
| A02B-0356-J962 | 31i-B5P Multi-Language Display - DUTCH |
| A02B-0356-J965 | 31i-B5P Multi-Language Display - JAPANESE |
| A02B-0356-J967 | 31i-B5P Multi-Language Display - CHINESE |
| A02B-0356-J968 | 31i-B5P Multi-Language Display - ITALIAN |
| A02B-0356-J969 | 31i-B5P Multi-Language Display - KOREAN |
| A02B-0356-J970 | 31i-B5P Multi-Language Display - SPANISH |
| A02B-0356-R410 | 31i-B5P Multi-Language Display - VIETNAMESE |
| A02B-0356-R411 | 31i-B5P Multi-Language Display - INDONESIAN |
| A02B-0356-R587 | 31i-B5P Multi-Language Display - TURKISH |
| A02B-0356-R686 | 31i-B5P Multi-Language Display - BULGARIAN |
| A02B-0356-R693 | 31i-B5P Multi-Language Display - SLOVAK |
| A02B-0356-R694 | 31i-B5P Multi-Language Display - ROMANIAN |
| A02B-0356-R726 | 31i-B5P Multi-Language Display - FINNISH |
| A02B-0356-S689 | 31i-B5P Multi-Language Display - CZECH |
| A02B-0356-S690 | 31i-B5P Multi-Language Display - HUNGARIAN |
| A02B-0356-S691 | 31i-B5P Multi-Language Display - SWEDISH |
| A02B-0356-S739 | 31i-B5P Multi-Language Display - POLISH |
| A02B-0356-S829 | 31i-B5P Multi-Language Display - CHINESE (Simplified Characters) |
| A02B-0356-S839 | 31i-B5P Multi-Language Display - GERMAN |
| A02B-0356-S841 | 31i-B5P Multi-Language Display - FRENCH |
| A02B-0356-S849 | 31i-B5P Multi-Language Display - RUSSIAN |
| A02B-0357-J650 | 31i-BP Multi-Language Display - DANISH |
| A02B-0357-J678 | 31i-BP Multi-Language Display - PORTUGUESE |
| A02B-0357-J962 | 31i-BP Multi-Language Display - DUTCH |
| A02B-0357-J965 | 31i-BP Multi-Language Display - JAPANESE |
| A02B-0357-J967 | 31i-BP Multi-Language Display - CHINESE |
| A02B-0357-J968 | 31i-BP Multi-Language Display - ITALIAN |
| A02B-0357-J969 | 31i-BP Multi-Language Display - KOREAN |
| A02B-0357-J970 | 31i-BP Multi-Language Display - SPANISH |
| A02B-0357-R410 | 31i-BP Multi-Language Display - VIETNAMESE |
| A02B-0357-R411 | 31i-BP Multi-Language Display - INDONESIAN |
| A02B-0357-R587 | 31i-BP Multi-Language Display - TURKISH |
| A02B-0357-R686 | 31i-BP Multi-Language Display - BULGARIAN |
| A02B-0357-R693 | 31i-BP Multi-Language Display - SLOVAK |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|-----------------------------------------------------------------|
| A02B-0357-R694 | 31i-BP Multi-Language Display - ROMANIAN |
| A02B-0357-R726 | 31i-BP Multi-Language Display - FINNISH |
| A02B-0357-S689 | 31i-BP Multi-Language Display - CZECH |
| A02B-0357-S690 | 31i-BP Multi-Language Display - HUNGARIAN |
| A02B-0357-S691 | 31i-BP Multi-Language Display - SWEDISH |
| A02B-0357-S739 | 31i-BP Multi-Language Display - POLISH |
| A02B-0357-S829 | 31i-BP Multi-Language Display - CHINESE (Simplified Characters) |
| A02B-0357-S839 | 31i-BP Multi-Language Display - GERMAN |
| A02B-0357-S841 | 31i-BP Multi-Language Display - FRENCH |
| A02B-0357-S849 | 31i-BP Multi-Language Display - RUSSIAN |
| A02B-0358-J650 | 32i-BP Multi-Language Display - DANISH |
| A02B-0358-J678 | 32i-BP Multi-Language Display - PORTUGUESE |
| A02B-0358-J962 | 32i-BP Multi-Language Display - DUTCH |
| A02B-0358-J965 | 32i-BP Multi-Language Display - JAPANESE |
| A02B-0358-J967 | 32i-BP Multi-Language Display - CHINESE |
| A02B-0358-J968 | 32i-BP Multi-Language Display - ITALIAN |
| A02B-0358-J969 | 32i-BP Multi-Language Display - KOREAN |
| A02B-0358-J970 | 32i-BP Multi-Language Display - SPANISH |
| A02B-0358-R410 | 32i-BP Multi-Language Display - VIETNAMESE |
| A02B-0358-R411 | 32i-BP Multi-Language Display - INDONESIAN |
| A02B-0358-R587 | 32i-BP Multi-Language Display - TURKISH |
| A02B-0358-R686 | 32i-BP Multi-Language Display - BULGARIAN |
| A02B-0358-R693 | 32i-BP Multi-Language Display - SLOVAK |
| A02B-0358-R694 | 32i-BP Multi-Language Display - ROMANIAN |
| A02B-0358-R726 | 32i-BP Multi-Language Display - FINNISH |
| A02B-0358-S689 | 32i-BP Multi-Language Display - CZECH |
| A02B-0358-S690 | 32i-BP Multi-Language Display - HUNGARIAN |
| A02B-0358-S691 | 32i-BP Multi-Language Display - SWEDISH |
| A02B-0358-S739 | 32i-BP Multi-Language Display - POLISH |
| A02B-0358-S829 | 32i-BP Multi-Language Display - CHINESE (Simplified Characters) |
| A02B-0358-S839 | 32i-BP Multi-Language Display - GERMAN |
| A02B-0358-S841 | 32i-BP Multi-Language Display - FRENCH |
| A02B-0358-S849 | 32i-BP Multi-Language Display - RUSSIAN |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

586

Setting and Display

Selection of Five Optional Languages

Features

This function allows to activate 5 different languages at once in the CNC. The 5 languages then are activated and the user can switch between the languages on the fly.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Increase the flexibility of the CNC usage in multi-language environment

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0323-R521 | 30i-B Selection of Five Optional Languages - Select Option Assemblies According Desired 5 Languages - Do Not Specify Any Single Language Option |
| A02B-0326-R521 | 31i-B5 Selection of Five Optional Languages - Select Option Assemblies According Desired 5 Languages - Do Not Specify Any Single Language Option |
| A02B-0327-R521 | 31i-B Selection of Five Optional Languages - Select Option Assemblies According Desired 5 Languages - Do Not Specify Any Single Language Option |
| A02B-0328-R521 | 32i-B Selection of Five Optional Languages - Select Option Assemblies According Desired 5 Languages - Do Not Specify Any Single Language Option |
| A02B-0333-R521 | 35i-B Selection of Five Optional Languages - Do Not Specify any Single Language Option |
| A02B-0334-R521 | PM i-A Selection of Five Optional Languages |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

587

Setting and Display

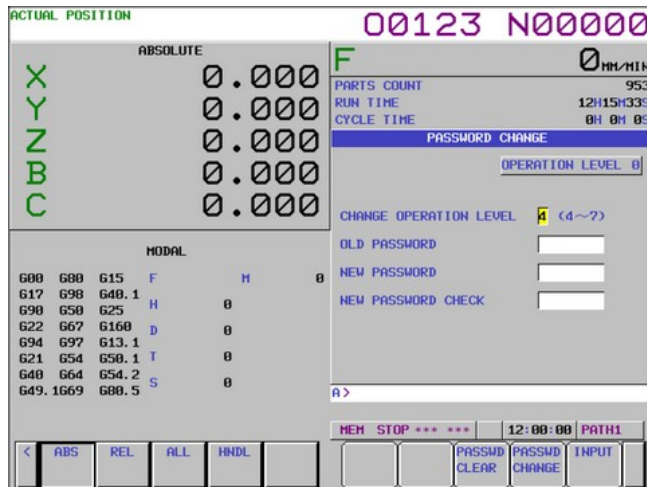

Protection of Data at Eight Levels

Features

The Protection of Data at Eight Levels function provides the ability to define multiple levels of access for the operators of the machine. Eight operation levels can be set for the CNC and PMC operations, and eight protection levels can be set for various types of CNC and PMC data.

When the CNC and PMC data is modified or output externally, the operation level and protect level are compared to determine whether to allow the modification or external output.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Improvement of the safety of operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-S828 | 30i-B Protection of Data at Eight Levels |
| A02B-0326-S828 | 31i-B5 Protection of Data at Eight Levels |
| A02B-0327-S828 | 31i-B Protection of Data at Eight Levels |
| A02B-0328-S828 | 32i-B Protection of Data at Eight Levels |
| A02B-0333-S828 | 35i-B Protection of Data at Eight Levels |
| A02B-0334-S828 | PM i-A Protection of Data at Eight Levels |
| A02B-0339-S828 | 0i-TF Protection of Data at Eight Levels |
| A02B-0340-S828 | 0i-MF Protection of Data at Eight Levels |
| A02B-0349-S828 | 0i-TFP Protection of Data at Eight Levels |
| A02B-0350-S828 | 0i-MFP Protection of Data at Eight Levels |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

588

Setting and Display

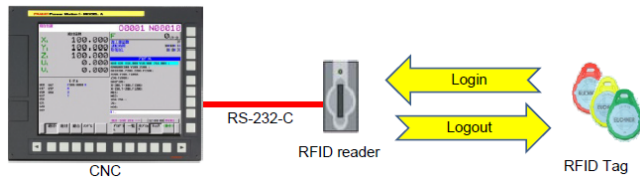

Personal Authentication Function

Features

The Personal Authentication function controls the access of operators to the CNC and restricts possible operations. The authentication can be done in two ways: Login on a authentication screen with user ID and password, or using an RFID tag in combination with an RFID reader connected to the CNC. Logins and logouts are recorded in the operation history. Every user has an operation level which determines the permitted operations, e.g. if the operator is allowed to modify programs.

The option "Protection of Data at Eight Levels" is required to use this function.

Benefits

- Protect your machines against undesired changes that compromise productivity
- Prevent recurring maloperations by tracking who did what and when on a machine

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-R332 | 30i-B Personal Authentication Function |
| A02B-0326-R332 | 31i-B5 Personal Authentication Function |
| A02B-0327-R332 | 31i-B Personal Authentication Function |
| A02B-0328-R332 | 32i-B Personal Authentication Function |
| A02B-0329-R332 | 30i-LB Personal Authentication Function |
| A02B-0330-R332 | 31i-LB Personal Authentication Function |
| A02B-0331-R332 | 30i-PB Personal Authentication Function |
| A02B-0332-R332 | 31i-PB Personal Authentication Function |
| A02B-0333-R332 | 35i-B Personal Authentication Function |
| A02B-0338-R332 | 0i-PF Personal Authentication Function |
| A02B-0339-R332 | 0i-TF Personal Authentication Function |
| A02B-0340-R332 | 0i-MF Personal Authentication Function |
| A02B-0349-R332 | 0i-TFP Personal Authentication Function |
| A02B-0350-R332 | 0i-MFP Personal Authentication Function |
| A02B-0353-R332 | 30i-BP Personal Authentication Function |
| A02B-0356-R332 | 31i-B5P Personal Authentication Function |
| A02B-0357-R332 | 31i-BP Personal Authentication Function |
| A02B-0358-R332 | 32i-BP Personal Authentication Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

589

Setting and Display

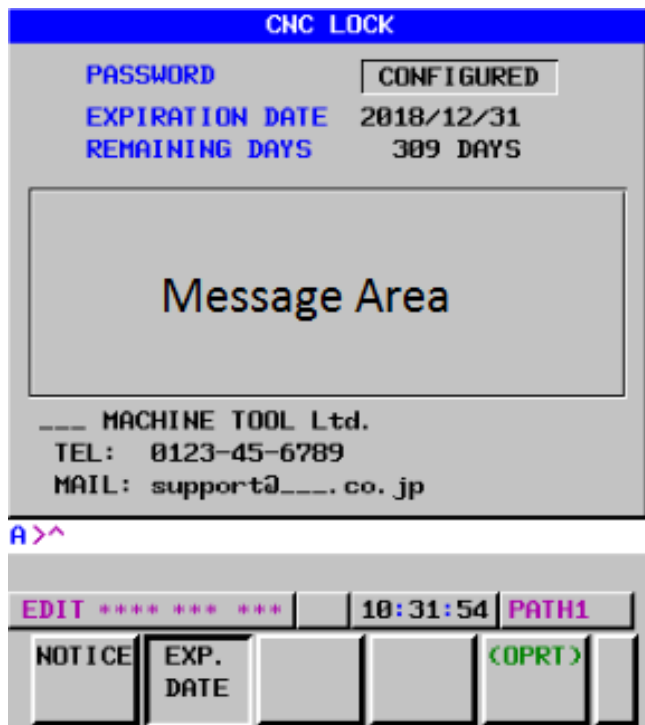

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

CNC Lock Function

Features

The CNC Lock function enables you to set password-protected expiration dates on CNCs. The CNC will not execute automatic operation anymore after the expiration date has passed. You can prepare a message for the end user to inform him about the blocking of the CNC and give further instructions. The function can be set on the CNC or by the software "CNC Lock Setting Data Preparation Tool".

The CNC Lock function is intended for leased machines or machines sold on installment plan. It allows to restrict operation of machines if payments are held off by the end user.

Benefits

- Facilitates machine sales on installment plan
- Facilitates machine leasing

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0327-R326 | 31i-B CNC Lock Function |
| A02B-0328-R326 | 32i-B CNC Lock Function |
| A02B-0333-R326 | 35i-B CNC Lock Function |
| A02B-0339-R326 | 0i-TF CNC Lock Function |
| A02B-0340-R326 | 0i-MF CNC Lock Function |
| A02B-0349-R326 | 0i-TFP CNC Lock Function |
| A02B-0350-R326 | 0i-MFP CNC Lock Function |
| A02B-0357-R326 | 31i-BP CNC Lock Function |
| A02B-0358-R326 | 32i-BP CNC Lock Function |

590

Setting and Display



Machining Condition Selecting Function

Features

Machining Condition Selecting Function (MCSF) is a programmable way for the operator to set a level of machine accuracy whilst also optimising productivity.

With 10 defined steps, speed can be prioritised during roughing and then precision for the final finishing cuts.

This function is a basic function in FANUC Series 0i-MF Plus (Type 0, 1 and 3).

Benefits

- Optimize the machining cycles
- Better quality
- Reduced machining time

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-S637 | 30i-B Machining Condition Selection Function |
| A02B-0326-S637 | 31i-B5 Machining Condition Selection Function |
| A02B-0327-S637 | 31i-B Machining Condition Selection Function |
| A02B-0328-S637 | 32i-B Machining Condition Selection Function |
| A02B-0339-S637 | 0i-TF Machining Condition Selecting Function |
| A02B-0340-S637 | 0i-MF Machining Condition Selection Function |
| A02B-0349-S637 | 0i-TFP Machining Condition Selection Function |
| A02B-0350-S637 | 0i-MFP Machining Condition Selection Function |
| A02B-0353-S637 | 30i-BP Machining Condition Selecting Function |
| A02B-0356-S637 | 31i-B5P Machining Condition Selecting Function |
| A02B-0357-S637 | 31i-BP Machining Condition Selecting Function |
| A02B-0358-S637 | 32i-BP Machining Condition Selecting Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

591

Setting and Display

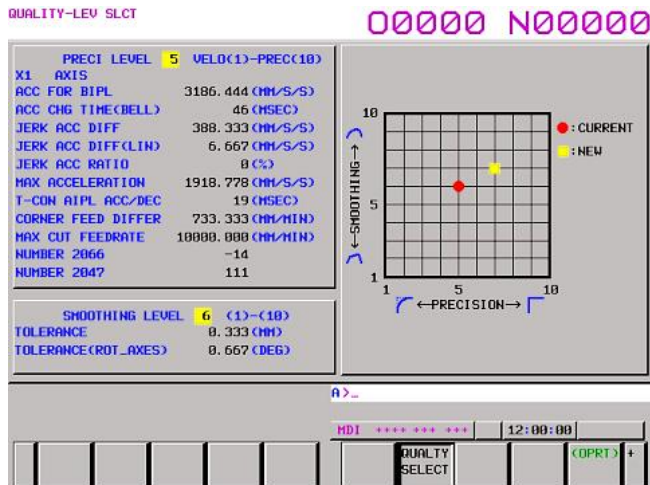

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Machining Quality Level Adjustment

Features

Smoothing and precision level of the Nano Smoothing function can be adjusted from an adjustment screen to set machining quality level.

The following options are necessary:

- AI Contour Control I or AI Contour Control II
- Nano Smoothing
- Machining Condition Selecting function

This function is a basic function in FANUC Series 0i-MF Plus (Type 0, 1 and 3).

Benefits


- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R593 | 30i-B Machining Quality Level Adjustment |
| A02B-0326-R593 | 31i-B5 Machining Quality Level Adjustment |
| A02B-0327-R593 | 31i-B Machining Quality Level Adjustment |
| A02B-0328-R593 | 32i-B Machining Quality Level Adjustment |
| A02B-0340-R593 | 0i-MF Machining Quality Adjustment Function |
| A02B-0353-R593 | 30i-BP Machining Quality Level Adjustment |
| A02B-0356-R593 | 31i-B5P Machining Quality Level Adjustment |
| A02B-0357-R593 | 31i-BP Machining Quality Level Adjustment |
| A02B-0358-R593 | 32i-BP Machining Quality Level Adjustment |

592

Setting and Display

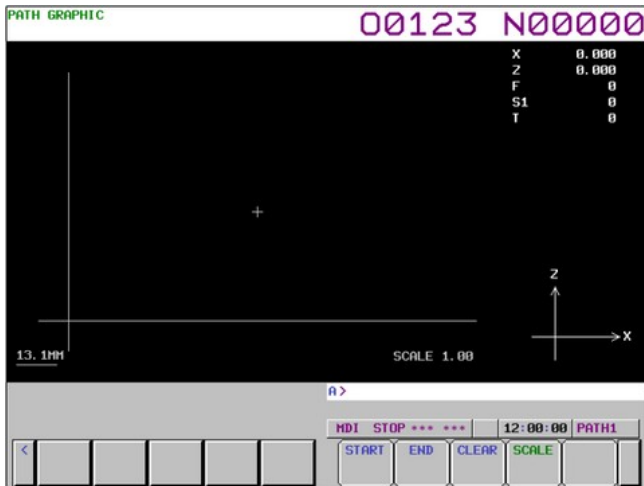

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Graphic Function

Features

Graphic Display option allows the tool path of a program to be drawn during machining.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits


- Easy to prove out tool paths
- Minimized crashes and scrap parts
- Reduced Set up/prove out time
- Increased operator confidence for running part program
- Easy to verify all 3 planes XY, YZ, ZX including isometric views
- Zooming for easy verification of dense cuts

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0323-J972 | 30i-B Graphic Display |
| A02B-0326-J972 | 31i-B5 Graphic Display |
| A02B-0327-J972 | 31i-B Graphic Display |
| A02B-0328-J972 | 32i-B Graphic Display |
| A02B-0331-J972 | 30i-PB Graphic Display |
| A02B-0332-J972 | 31i-PB Graphic Display |

593

Setting and Display

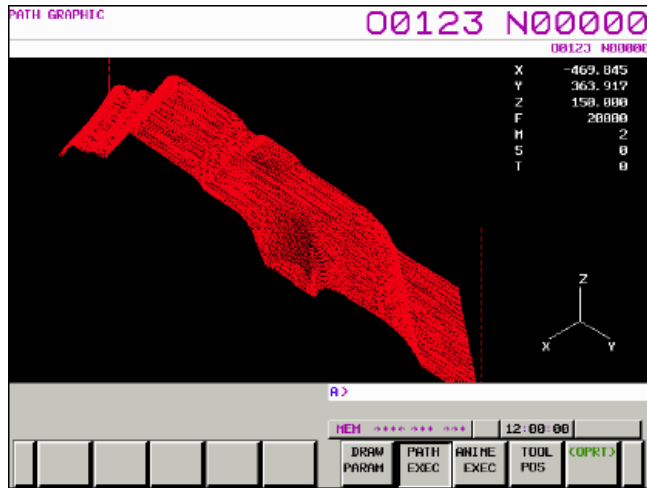

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Dynamic Graphic Display Function

Features

Created programs can be checked visually by displaying them using graphic data. Graphic data can be displayed in the following two drawing modes:

- Tool path drawing mode: Tool paths are drawn with lines.
- Animation drawing mode: The profile of a workpiece that changes as the tool moves can be simulated and drawn three-dimensionally.

This function is a basic function in FANUC Series 0i-MF Plus (Type 1, 3 and 5). Please use iHMI Machining Simulation on 0i-F Plus (Type 0).

Benefits


- Much faster drawing capabilities compared to Graphic Display function
- Easy to prove out tool paths
- Minimized crashes and scrap parts
- Reduced Set up/prove out time
- Increased operator confidence for running part program
- Easy to verify all 3 planes XY, YZ, ZX including isometric views
- Zooming for easy verification of dense cuts

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-J760 | 30i-B Dynamic Graphic Display Function |
| A02B-0326-J760 | 31i-B5 Dynamic Graphic Display Function |
| A02B-0327-J760 | 31i-B Dynamic Graphic Display Function |
| A02B-0328-J760 | 32i-B Dynamic Graphic Display Function |
| A02B-0339-J760 | 0i-TF Dynamic Graphic Display |
| A02B-0340-J760 | 0i-MF Dynamic Graphic Display |
| A02B-0349-J760 | 0i-TFP Dynamic Graphic Display |
| A02B-0353-J760 | 30i-BP Dynamic Graphic Display Function |
| A02B-0356-J760 | 31i-B5P Dynamic Graphic Display Function |
| A02B-0357-J760 | 31i-BP Dynamic Graphic Display Function |
| A02B-0358-J760 | 32i-BP Dynamic Graphic Display Function |

594

Setting and Display

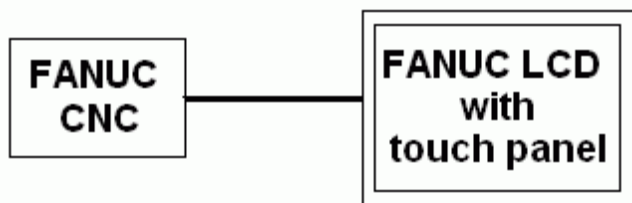

Touch Panel Control

Features

The Touch Panel Control function is required to support the Touch Panel display of the CNC. The physical Touch Panel display is also required.

A display unit with a touch panel enables the operator to perform control of the menus touching the screen.

Benefits

- Simplifies the operation of the machine
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-J682 | 30i-B Touch Panel Control |
| A02B-0326-J682 | 31i-B5 Touch Panel Control |
| A02B-0327-J682 | 31i-B Touch Panel Control |
| A02B-0328-J682 | 32i-B Touch Panel Control |
| A02B-0339-J682 | 0i-TF Touch Panel Control |
| A02B-0340-J682 | 0i-MF Touch Panel Control |
| A02B-0349-J682 | 0i-TFP Touch Panel Control |
| A02B-0350-J682 | 0i-MFP Touch Panel Control |
| A02B-0353-J682 | 30i-BP Touch Panel Control |
| A02B-0356-J682 | 31i-B5P Touch Panel Control |
| A02B-0357-J682 | 31i-BP Touch Panel Control |
| A02B-0358-J682 | 32i-BP Touch Panel Control |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

595

Setting and Display

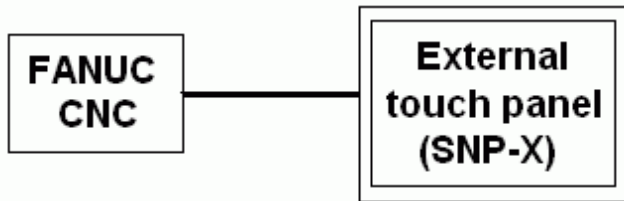

External Touch Panel Interface

Features

The External Touch Panel Interface allows an External Touch Panel using the SNP-X protocol to be connected with the CNC.

The External Touch Panel Interface has functions that can read / write in from / to the PMC such control signals as input signal(X), output signal(Y), internal relay(R), keep relay(K), data table(D), timer(T), counter(C) and the function is almost the same as operating panel of machine.

Benefits

- Simplifies the connection of 3rd party screens using the SNP-X protocol of GE
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-J685 | 30i-B External Touch Panel Interface |
| A02B-0326-J685 | 31i-B5 External Touch Panel Interface |
| A02B-0327-J685 | 31i-B External Touch Panel Interface |
| A02B-0328-J685 | 32i-B External Touch Panel Interface |
| A02B-0333-J685 | 35i-B External Touch Panel Interface |
| A02B-0334-J685 | PM i-A External Touch Panel Interface |
| A02B-0339-J685 | 0i-TF External Touch Panel interface |
| A02B-0340-J685 | 0i-MF External Touch Panel interface |
| A02B-0349-J685 | 0i-TFP External Touch Panel Interface |
| A02B-0350-J685 | 0i-MFP External Touch Panel Interface |
| A02B-0353-J685 | 30i-BP External Touch Panel Interface |
| A02B-0356-J685 | 31i-B5P External Touch Panel Interface |
| A02B-0357-J685 | 31i-BP External Touch Panel Interface |
| A02B-0358-J685 | 32i-BP External Touch Panel Interface |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

596

Setting and Display

Two Touch Panels Control for Stand-Alone Type CNC

Features

An external touch panel can be used together with the Stand-Alone Type CNC display's touch panel.

Benefits

- Operation improvement of large machines

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------|
| A02B-0323-R658 | 30i-B Two Touch Panel Control for Stand-Alone Type CNC |
| A02B-0326-R658 | 31i-B5 Two Touch Panel Control for Stand-Alone Type CNC |
| A02B-0327-R658 | 31i-B Two Touch Panel Control for Stand-Alone Type CNC |
| A02B-0328-R658 | 32i-B Two Touch Panel Control for Stand-Alone Type CNC |
| A02B-0333-R658 | 35i-B Two Touch Panel Control for Stand-Alone Type CNC |
| A02B-0334-R658 | PM i-A Two Touch Panel Control for Stand-Alone Type CNC |
| A02B-0353-R658 | 30i-BP Two Touch Panel for Stand-Alone Type CNC |
| A02B-0356-R658 | 31i-B5P Two Touch Panel for Stand-Alone Type CNC |
| A02B-0357-R658 | 31i-BP Two Touch Panel for Stand-Alone Type CNC |
| A02B-0358-R658 | 32i-BP Two Touch Panel for Stand-Alone Type CNC |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

597

Setting and Display

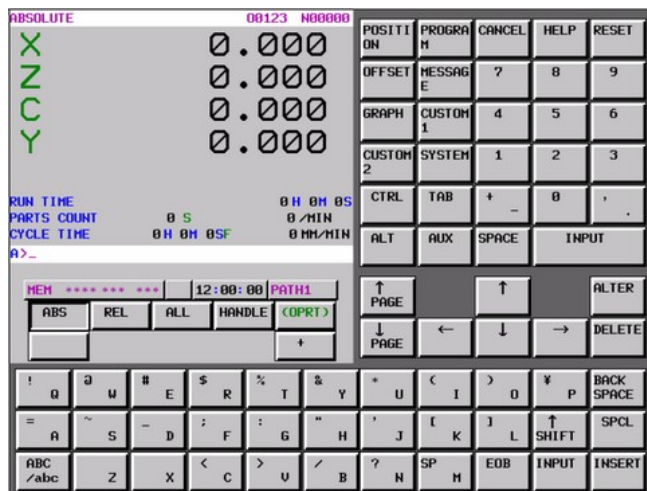

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Virtual MDI Key

Features

The Virtual MDI Key function provides a replacement for the physical MDI unit; in this case, the MDI keys are displayed on the Touch Screen.

Since the MDI key hardware is not required any more, a more compact operator panel can be designed.

Benefits


- Simplifies the design of compact operator panels

Ordering Information

| Specification | Description |
|----------------|---------------------------------|
| A02B-0323-S883 | 30i-B Virtual MDI Key Function |
| A02B-0326-S883 | 31i-B5 Virtual MDI Key Function |
| A02B-0327-S883 | 31i-B Virtual MDI Key Function |
| A02B-0328-S883 | 32i-B Virtual MDI Key Function |
| A02B-0339-S883 | 0i-TF Virtual MDI Key |
| A02B-0340-S883 | 0i-MF Virtual MDI Key |
| A02B-0349-S883 | 0i-TFP Virtual MDI Key |
| A02B-0350-S883 | 0i-MFP Virtual MDI Key |
| A02B-0353-S883 | 30i-BP Virtual MDI Key |
| A02B-0356-S883 | 31i-B5P Virtual MDI Key |
| A02B-0357-S883 | 31i-BP Virtual MDI Key |
| A02B-0358-S883 | 32i-BP Virtual MDI Key |

598

Setting and Display

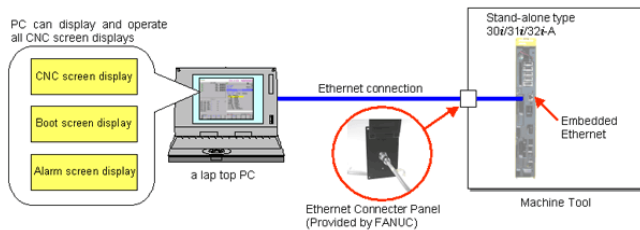

Ethernet Display Function

Features

The Ethernet Display Function provides CNC screen display on PC screen via Embedded Ethernet.

Its capability to show maintenance screen display, boot and alarm, in addition to CNC screen display for usual operation, enables linking to PC for maintenance, instead of the CNC display unit.

Benefits

- Provide Ethernet connectivity and remote control function for the CNC
- Improves machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-R950 | 30i-B Ethernet Display Function |
| A02B-0326-R950 | 31i-B5 Ethernet Display Function |
| A02B-0327-R950 | 31i-B Ethernet Display Function |
| A02B-0328-R950 | 32i-B Ethernet Display Function |
| A02B-0333-R950 | 35i-B Ethernet Display Function |
| A02B-0334-R950 | PM i-A Ethernet Display Function |
| A02B-0339-R950 | 0i-TF Ethernet Display Function |
| A02B-0340-R950 | 0i-MF Ethernet Display Function |
| A02B-0349-R950 | 0i-TFP Ethernet Display Function |
| A02B-0350-R950 | 0i-MFP Ethernet Display Function |
| A02B-0353-R950 | 30i-BP ETHERNET Display Function |
| A02B-0356-R950 | 31i-B5P ETHERNET Display Function |
| A02B-0357-R950 | 31i-BP Ethernet Display function |
| A02B-0358-R950 | 32i-BP Ethernet Display function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

599

Setting and Display

Ethernet Display Sharing Function

Features

The Ethernet Display Sharing function provides the possibility to allocate one display unit to several standalone CNC. Up to 8 CNC can be connected to one display (One Master CNC and 7 Slave CNC).

It can display CNC maintenance screens (including the BOOT, IPL, and alarm screens) as well as the standard CNC operation screens.

Benefits

- Cost reduction on large machines featuring several CNC

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------------------|
| A02B-0323-R722 | 30i-B Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0326-R722 | 31i-B5 Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0327-R722 | 31i-B Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0328-R722 | 32i-B Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0333-R722 | 35i-B Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0334-R722 | PM i-A Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0339-R722 | 0i-TF Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0340-R722 | 0i-MF Ethernet Display Sharing Function - Specify in each CNC linked with Shared LCD Unit via Ethernet |
| A02B-0349-R722 | 0i-TFP Ethernet Display Sharing Function |
| A02B-0350-R722 | 0i-MFP Ethernet Display Sharing Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

600

Setting and Display

Twin Display Function with Ethernet

Features

The twin display function with Ethernet provides the same display and operation as the standard CNC on a secondary display unit through Ethernet connection.

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R711 | 30i-B Twin Display Function with Ethernet |
| A02B-0326-R711 | 31i-B5 Twin Display Function with Ethernet |
| A02B-0327-R711 | 31i-B Twin Display Function with Ethernet |
| A02B-0328-R711 | 32i-B Twin Display Function with Ethernet |
| A02B-0333-R711 | 35i-B Twin Display Function with Ethernet |
| A02B-0334-R711 | PM i-A Twin Display Function with Ethernet |
| A02B-0349-R711 | 0i-TFP Twin Display Function with Ethernet |
| A02B-0350-R711 | 0i-MFP Twin Display Function with Ethernet |
| A02B-0353-R711 | 30i-BP Twin Display Function with ETHERNET |
| A02B-0356-R711 | 31i-B5P Twin Display Function with ETHERNET |
| A02B-0357-R711 | 31i-BP Twin Display Function with ETHERNET |
| A02B-0358-R711 | 32i-BP Twin Display Function with ETHERNET |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

601

Setting and Display

CNC Screen Dual Display Function

Features

With the Dual CNC Screen Display Function, it is possible to display the content of the CNC screen on both the original CNC screen as well as on a PC or PANEL i connected to the CNC via Ethernet or HSSB.

Benefits

- Machine operation on large machining centers requiring 2 operator stations

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0323-S884 | 30i-B Dual Screen Display Function (Dual SDF) |
| A02B-0326-S884 | 31i-B5 Dual Screen Display Function (Dual SDF) |
| A02B-0327-S884 | 31i-B Dual Screen Display Function (Dual SDF) |
| A02B-0328-S884 | 32i-B Dual Screen Display Function (Dual SDF) |
| A02B-0333-R709 | 35i-B CNC Screen Display Function - Incl. CNC Screen Dual Display Function (Specify "Extended Drivers and Libraries" for HSSB Connection, or "Ethernet Function") |
| A02B-0334-R709 | PM i-A CNC Screen Display Function - Includes CNC Screen Dual Display Function |
| A02B-0339-S884 | 0i-TF Dual Screen Display Function (Dual SDF) |
| A02B-0340-S884 | 0i-MF Dual Screen Display Function (Dual SDF) |
| A02B-0349-S884 | 0i-TFP Dual Screen Display Function (Dual SDF) |
| A02B-0350-S884 | 0i-MFP Dual Screen Display Function (Dual SDF) |
| A02B-0353-S884 | 30i-BP Dual Screen Display Function (Dual SDF) |
| A02B-0356-S884 | 31i-B5P Dual Screen Display Function (Dual SDF) |
| A02B-0357-S884 | 31i-BP Dual Screen Display Function (Dual SDF) |
| A02B-0358-S884 | 32i-BP Dual Screen Display Function (Dual SDF) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

602

Setting and Display



CNC Screen Display for 19" LCD

Features

This function provides the capability to control the 19" PANEL i display on the CNC.

Benefits

- Improvement of the operation using larger screen

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R624 | 30i-B CNC Screen Display Function for 19.0" LCD Unit |
| A02B-0326-R624 | 31i-B5 CNC Screen Display Function for 19.0" LCD Unit |
| A02B-0327-R624 | 31i-B CNC Screen Display Function for 19.0" LCD Unit |
| A02B-0328-R624 | 32i-B CNC Screen Display Function for 19.0" LCD Unit |
| A02B-0349-R624 | 0i-TFP CNC Screen Display for 19.0" LCD Unit |
| A02B-0350-R624 | 0i-MFP CNC Screen Display for 19.0" LCD Unit |
| A02B-0353-R624 | 30i-BP 19.0" CNC Screen Display |
| A02B-0356-R624 | 31i-B5P 19.0" CNC Screen Display |
| A02B-0357-R624 | 31i-BP 19.0" CNC Screen Display |
| A02B-0358-R624 | 32i-BP 19.0" CNC Screen Display |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

603

Setting and Display



Enlarged CNC Screen Display for 19" LCD

Features

This function enlarges and displays the design for 15" LCD on 19" PANEL i. It is possible with this feature to magnify the size of the screen so that it is possible to better read the screen and use the full surface of the 19" screen.

Benefits

- Improvement of the operation using large fonts sizes

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------|
| A02B-0323-R673 | 30i-B Enlarged CNC Screen Display for 19.0" LCD Unit |
| A02B-0326-R673 | 31i-B5 Enlarged CNC Screen Display for 19.0" LCD Unit |
| A02B-0327-R673 | 31i-B Enlarged CNC Screen Display for 19.0" LCD Unit |
| A02B-0328-R673 | 32i-B Enlarged CNC Screen Display for 19.0" LCD Unit |
| A02B-0349-R673 | 0i-TFP Enlarged CNC Screen Display for 19.0" LCD Unit |
| A02B-0350-R673 | 0i-MFP Enlarged CNC Screen Display for 19.0" LCD Unit |
| A02B-0353-R673 | 30i-BP Enlarged CNC Screen Display for 19.0" LCD |
| A02B-0356-R673 | 31i-B5P Enlarged CNC Screen Display for 19.0" LCD |
| A02B-0357-R673 | 31i-BP Enlarged CNC Screen Display for 19.0" LCD |
| A02B-0358-R673 | 32i-BP Enlarged CNC Screen Display for 19.0" LCD |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

604

Setting and Display



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

CNC Screen Web Server Function

Features

This function enables screen display and screen switch of CNC on a Web browser of a Tablet-type device that connects with CNC through Ethernet.

The screen which is displayed on a Web browser is the same as the screen displayed on a standard CNC Display unit.

The screen switch operation at a Web browser is reflected in a standard CNC Display unit.

Benefits


- Provide a full screen duplication of the CNC on Web-Browser or Tablet devices

Ordering Information

| Specification | Description |
|----------------|----------------------------------------|
| A02B-0323-R728 | 30i-B CNC Screen Web Server Function |
| A02B-0326-R728 | 31i-B5 CNC Screen Web Server Function |
| A02B-0327-R728 | 31i-B CNC Screen Web Server Function |
| A02B-0328-R728 | 32i-B CNC Screen Web Server Function |
| A02B-0333-R728 | 35i-B CNC Screen Web Server Function |
| A02B-0334-R728 | PM i-A CNC Screen Web Server Function |
| A02B-0339-R728 | 0i-TF CNC Screen WEB Server Function |
| A02B-0340-R728 | 0i-MF CNC Screen WEB Server Function |
| A02B-0349-R728 | 0i-TFP CNC Screen Web Server Function |
| A02B-0350-R728 | 0i-MFP CNC Screen Web Server Function |
| A02B-0353-R728 | 30i-BP CNC Screen Web Server Function |
| A02B-0356-R728 | 31i-B5P CNC Screen Web Server Function |
| A02B-0357-R728 | 31i-BP CNC Screen Web Server Function |
| A02B-0358-R728 | 32i-BP CNC Screen Web Server Function |

605

Setting and Display

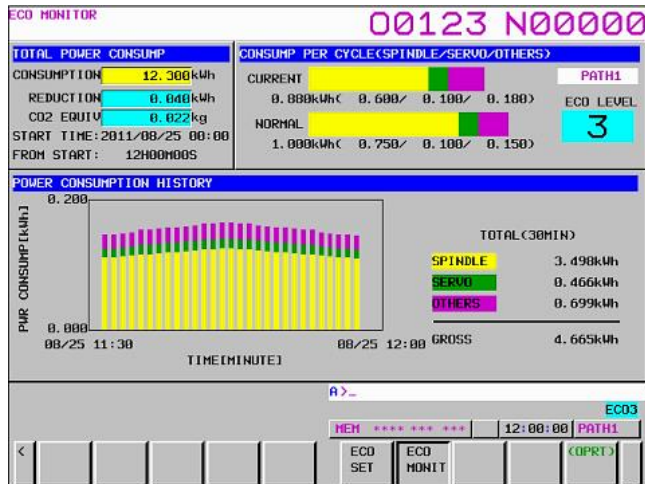

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Energy Saving Level Selection Function

Features

The total power consumption of a machine is the sum of:

- Power consumption of the spindle motors
- Power consumption of the servo motors
- Power consumption in peripheral devices (coolant pump, etc.)

Suppressing torque at acceleration / deceleration in spindles, where a large power consumption is generated, can reduce whole power consumption of a machine. The drawback is that it has an influence on the machining time.

When using the Energy Level Selection Function, it is possible to switch between machining with shorter time and that with less power consumption.

In addition, the function provides screens to monitor the energy consumption of the spindles, servo motors and peripherals in real time.

Benefits

- Monitoring of the consumption of the machine and identification of the source
- Adjustment of the ratio between productivity and energy consumption to optimize costs

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0323-R719 | 30i-B Energy Saving Level Selection Function - Usable with 30i/31i/32i/35i-B Spindle Amplifiers A06B-6220-Hxxx#H600 or A06B-6230-Hxxx#H600 or A06B-6270-Hxxx#H600 |
| A02B-0326-R719 | 31i-B5 Energy Saving Level Selection Function - Usable with 30i/31i/32i/35i-B Spindle Amplifiers A06B-6220-Hxxx#H600 or A06B-6230-Hxxx#H600 or A06B-6270-Hxxx#H600 |
| A02B-0327-R719 | 31i-B Energy Saving Level Selection Function - Usable with 30i/31i/32i/35i-B Spindle Amplifiers A06B-6220-Hxxx#H600 or A06B-6230-Hxxx#H600 or A06B-6270-Hxxx#H600 |
| A02B-0328-R719 | 32i-B Energy Saving Level Selection Function - Usable with 30i/31i/32i/35i-B Spindle Amplifiers A06B-6220-Hxxx#H600 or A06B-6230-Hxxx#H600 or A06B-6270-Hxxx#H600 |
| A02B-0339-R719 | 0i-TF Energy Saving Level Selecting Function |
| A02B-0340-R719 | 0i-MF Energy Saving Level Select Function |
| A02B-0349-R719 | 0i-TFP Energy Saving Level Selecting Function |
| A02B-0350-R719 | 0i-MFP Energy Saving Level Selecting Function |
| A02B-0353-R719 | 30i-BP Energy Saving Level Selecting Function |
| A02B-0356-R719 | 31i-B5P Energy Saving Level Selecting Function |

606

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0357-R719 | 31i-BP Energy Saving Level Selecting Function |
| A02B-0358-R719 | 32i-BP Energy Saving Level Selecting Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

607

Setting and Display

| MACHINE STATUS HISTORY | | | 00123 N00000 | | |
|----------------------------------------------------|----------------------|----------------------|---------------------|----|--|
| DETECT TIME 2012/06/16 14:19:32 NON-SAVE NO. 00045 | | | [HEAD1] NO. 094/096 | | |
| HISTORY LIST | | SIGNAL INFORMATION | | | |
| NO. | DETECT TIME | MULTI SENSOR UNIT | PMC SIG. | | |
| 001 | 2012/06/14 14:17:39 | SHCK1(X)X00000 0.0 G | X00010 | 00 | |
| 002 | 2012/06/14 14:17:41 | LY(X)X00002 0.0 G | Y00020 | 00 | |
| 003 | 2012/06/14 14:17:42 | CZ(X)X00004 0.0 G | G00030 | 00 | |
| 004 | 2012/06/15 09:18:29* | SHCK2(X)X00006 0.0 G | F00040 | 00 | |
| 005 | 2012/06/15 09:18:30 | LY(X)X00008 1.9 G | | | |
| 006 | 2012/06/15 09:18:30 | CZ(X)X00010 0.0 G | | | |
| 007 | 2012/06/15 09:18:31 | CHN1 X00012 0 | | | |
| 008 | 2012/06/15 09:18:31 | CHN2 X00014 0 | | | |
| 009 | 2012/06/15 09:18:32 | TEMP1 X00016 0.0℃ | | | |
| 010 | 2012/06/15 09:18:33 | TEMP2 X00018 0.0℃ | | | |
| 011 | 2012/06/15 09:18:33 | TEMP3 X00020 0.0℃ | | | |
| 012 | 2012/06/15 09:18:33 | TEMP4 X00022 0.0℃ | | | |
| 013 | 2012/06/15 09:18:34 | TEMP5 X00024 0.0℃ | | | |
| 014 | 2012/06/15 09:18:34 | TEMP6 X00026 0.0℃ | | | |
| 015 | 2012/06/15 09:18:34 | TEMP7 X00028 0.0℃ | | | |
| 016 | 2012/06/15 09:18:34 | TEMP8 X00030 0.0℃ | | | |
| 017 | 2012/06/16 14:19:32* | | | | |
| 018 | 2012/06/16 14:20:19 | | | | |
| 019 | 2012/06/16 14:20:20 | | | | |

Machine State Monitoring Function

Features

This function monitors the state of the machine and when problems occur on the machine, it is possible to retrieve information such as the operation history, the position and the feedrate at the time of the problem and other useful information from the CNC memory.

The retrieved information can be used to investigate the cause of machine breakdown.

It is also possible to customize the function to monitor additional information such as shock value, abnormal load torque, the Multi-Sensor Unit (MSU) and unexpected disturbance torque detection.

When a problem occurs on the machine, such as a spindle collision, the ladder program notifies the CNC; when the CNC is notified it saves the information related to the event in the CNC memory for later retrieval.

The CNC can save a maximum of 100 events in its memory.

Benefits

- Collection of key data to help the investigation of problems on machine
- Reduction of the breakdown time and better support of the maintenance teams
- Overall increase of the productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0323-R717 | 30i-B Machine State Monitoring Function |
| A02B-0326-R717 | 31i-B5 Machine State Monitoring Function |
| A02B-0327-R717 | 31i-B Machine State Monitoring Function |
| A02B-0328-R717 | 32i-B Machine State Monitoring Function |
| A02B-0333-R717 | 35i-B Machine State Monitoring Function |
| A02B-0334-R717 | PM i-A Machine State Monitoring Function |
| A02B-0339-R717 | 0i-TF Machine State Monitoring Function |
| A02B-0340-R717 | 0i-MF Machine State Monitoring Function |
| A02B-0349-R717 | 0i-TFP Machine State Monitoring Function |
| A02B-0350-R717 | 0i-MFP Machine State Monitoring Function |
| A02B-0353-R717 | 30i-BP Machine State Monitoring Function |
| A02B-0356-R717 | 31i-B5P Machine State Monitoring Function |
| A02B-0357-R717 | 31i-BP Machine State Monitoring Function |
| A02B-0358-R717 | 32i-BP Machine State Monitoring Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

608

Setting and Display

MACHINE CONFIGURATION SELECTING 00123 N00000

PARAMETER SELECT MACHINE CONF: No. 1 MILLING_CON1

| | No. 3 | No. 4 | No. 5 | No. 6 |
|-------|--------------|--------------|--------------|--------------|
| | MILLING_CON3 | TURNING_CON1 | TURNING_CON2 | TURNING_CON3 |
| 01022 | | | | |
| X | 0 | 0 | 0 | 0 |
| Y | 0 | 0 | 0 | 0 |
| Z | 0 | 0 | 0 | 0 |
| C | 0 | 0 | 0 | 0 |
| B | 0 | 0 | 0 | 0 |
| A | 0 | 0 | 0 | 0 |
| 19665 | 00000000 | 00000000 | 00000000 | 00000000 |
| 19666 | 0.000 | 0.000 | 0.000 | 0.000 |

EDIT ***** 12:00:00

< NO. SRH ON: 1 OFF: 0 +INPUT INPUT READ PUNCH

Machine Configuration Selecting Function

Features

The Machine Configuration Selecting function allows an easy switching of machine configuration when the machine needs to adapt to different production environments or batch.

Ten sets of parameters for these machine configurations can be set on machine configuration selecting screen.

Benefits

- Decreases the time required to switch between different production batches and setups
- Increases the efficiency and the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-R700 | 30i-B Machine Configuration Selection Function |
| A02B-0326-R700 | 31i-B5 Machine Configuration Selection Function |
| A02B-0327-R700 | 31i-B Machine Configuration Selection Function |
| A02B-0328-R700 | 32i-B Machine Configuration Selection Function |
| A02B-0353-R700 | 30i-BP Machine Configuration Selecting Function |
| A02B-0356-R700 | 31i-B5P Machine Configuration Selecting Function |
| A02B-0357-R700 | 31i-BP Machine Configuration Selecting Function |
| A02B-0358-R700 | 32i-BP Machine Configuration Selecting Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

609

Setting and Display

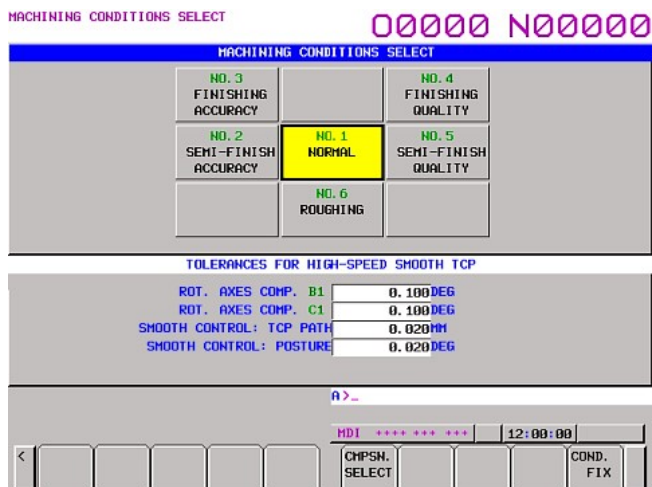

5-Axis Machining Condition Setting Function

Features

The 5-axis Machining Condition Setting provides the capability to change the parameters of machining conditions according to the machining situation when an operator selects one among six machining conditions.

This function provides a selection screen and a setting screen. The selecting screen is a screen for the operator, and the setting screen is a screen for the machine builder.

Note

This function cannot be used together with the following functions:

- Machining condition selecting function
- Machining quality level adjustment

Benefits

- Decreases the time required to switch between different production batches and setups of 5-axis machines
- Increases the efficiency and the productivity of the machine

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-R721 | 30i-B 5-Axis Machinng Condition Setting Function |
| A02B-0326-R721 | 31i-B5 5-Axis Machinng Condition Setting Function |
| A02B-0353-R721 | 30i-BP 5-Axis Machining Condition Setting Function |
| A02B-0356-R721 | 31i-B5P 5-Axis Machining Condition Setting Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

610

Setting and Display

Main Menu Screen Customizing Function

Features

The design and title string of the icon and the string of category in the main menu screen can be customized by using the PC application

The main menu screen can register the often used screens and the registered screen is displayed by icon. The objective screen can be displayed by selecting the icon. For the feature of each MTB, there is a demand to customize the design and title of icon.

Benefits

The following items of the main menu can be customized by using the PC-application.

1. The design of the icon
2. The title string of the icon
3. The string of the category
4. The default order of the icons

Main menu screen customization tool (A08B-9010-J525#ZZ11 is necessary

This function cannot be used with machine operation menu function (S844)

This function cannot be used with 8.4inch LCD

This function cannot be used with 19inch LCD

For 10.4inch LCD: A02B-0323-J541#60VN edition 07.00 or later

For 10.4inch tybe B, 15inch LCD:

- A02B-0323-J587#60VP edition 11.00 or later
- A02B-0323-J588#60VQ edition 07.00 or later

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-R848 | 30i-B Main Menu Screen - Customising Function |
| A02B-0326-R848 | 31i-B5 Main Menu Screen - Customising Function |
| A02B-0327-R848 | 31i-B Main Menu Screen - Customising Function |
| A02B-0328-R848 | 32i-B Main Menu Screen - Customising Function |
| A02B-0339-R848 | 0i-TF Main Menu Screen Customisation Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

611

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0340-R848 | 0i-MF Main Menu Screen Customization Function |
| A02B-0349-R848 | 0i-TFP Main Menu Screen Customising Function |
| A02B-0350-R848 | 0i-MFP Main Menu Screen Customising Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

613

Setting and Display

MDI Reset Key Invalidation

Features

There are some applications where the untimely interruption of a running NC program could lead to potentially dangerous situations. The MDI Reset Key Invalidation function prevents this. If the reset key on the MDI is pushed while executing a NC program, the reset is ignored and the execution of the NC program is not stopped.

Benefits

- Avoid potentially dangerous situations

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------|
| A02B-0323-R549 | 30i-B MDI Reset Key Invalidation Function |
| A02B-0326-R549 | 31i-B5 MDI Reset Key Invalidation Function |
| A02B-0327-R549 | 31i-B MDI Reset Key Invalidation Function |
| A02B-0328-R549 | 32i-B MDI Reset Key Invalidation Function |
| A02B-0333-R549 | 35i-B MDI Reset Key Invalidation Function |
| A02B-0334-R549 | PM i-A MDI Reset Key Invalidation Function |
| A02B-0353-R549 | 30i-BP MDI Reset Key Invalidation Function |
| A02B-0356-R549 | 31i-B5P MDI Reset Key Invalidation Function |
| A02B-0357-R549 | 31i-BP MDI Reset Key Invalidation Function |
| A02B-0358-R549 | 32i-BP MDI Reset Key Invalidation Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

614

Setting and Display

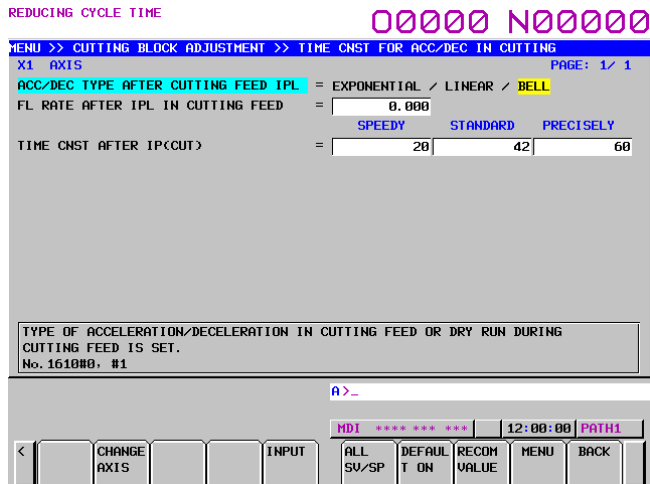

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Machine Setting Switching Function

Features

Up to three setting patterns related to reducing cycle time can be selected by an operator. Switching to the setting pattern that corresponds to the machining conditions can be done easily. The effective setting pattern can be switched by screen operation, G08.1 command or signal input.

Benefits

- Set parameters for different machining conditions easily

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------|
| A02B-0323-R412 | 30i-B Machine Setting Switching Function |
| A02B-0326-R412 | 31i-B5 Machine Setting Switching Function |
| A02B-0327-R412 | 31i-B Machine Setting Switching Function |
| A02B-0328-R412 | 32i-B Machine Setting Switching Function |
| A02B-0353-R412 | 30i-BP Machine Setting Switching Function |
| A02B-0356-R412 | 31i-B5P Machine Setting Switching Function |
| A02B-0357-R412 | 31i-BP Machine Setting Switching Function |
| A02B-0358-R412 | 32i-BP Machine Setting Switching Function |

615

Setting and Display

Error Compensation Data Protection Function

Features

Error Compensation Data Protection Function prohibits changes of various error compensation data. This prevents unintentional modification of the data. The following compensation data is protected:

- Stored Pitch Error Compensation
- Bi-Directional Pitch Error Compensation
- Extended Bi-Directional Pitch Error Compensation
- Interpolation Type Pitch Error Compensation

The compensation data is protected against changes from the following inputs:

- Screen input
- File input
- Programmable data input (G10)
- PMC window
- Macro Executor
- C-Language Executor
- FOCAS2

Benefits

- Prevent unintentional modification of compensation data

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-R329 | 30i-B Error Compensation Data Protection Function |
| A02B-0326-R329 | 31i-B5 Error Compensation Data Protection Function |
| A02B-0327-R329 | 31i-B Error Compensation Data Protection Function |
| A02B-0328-R329 | 32i-B Error Compensation Data Protection Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

616

Functions

Data Input/Output

This section of the catalogue contains the functions related to Data Input / Output.

Some of the functions detailed in the catalogue:

- RS232 interface
- Data Server
- Messaging
- Automatic Backup
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

617

Data Input/Output

RS232C Interface

Features

The Reader / Puncher Interface option enables the on board RS-232 port to be able to input / output files to / from the CNC.

This function is a basic function in FANUC Series 30i-B Plus (2 channels) and in FANUC Series 0i-F and 0i-F Plus (1 channel).

Benefits

- Download / Upload programs in background edit mode
- Output data to external PC for SPC charts
- Drip feed large programs
- Output data to serial printer
- No need to un-hook peripheral devices
- User selectable ports

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0323-J900 | 30i-B Reader/Puncher Interface for 1 Channel |
| A02B-0323-J901 | 30i-B Reader/Puncher Interface for 2 Channels |
| A02B-0326-J900 | 31i-B5 Reader/Puncher Interface for 1 Channel |
| A02B-0326-J901 | 31i-B5 Reader/Puncher Interface for 2 Channels |
| A02B-0327-J900 | 31i-B Reader/Puncher Interface for 1 Channel |
| A02B-0327-J901 | 31i-B Reader/Puncher Interface for 2 Channels |
| A02B-0328-J900 | 32i-B Reader/Puncher Interface for 1 Channel |
| A02B-0328-J901 | 32i-B Reader/Puncher Interface for 2 Channels |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

618

Data Input/Output

RS232C Interface Expansion of Receiving Buffer

Features

Expands the receiving buffer of the RS-232 Reader/Puncher interface from the default size of 0.5K bytes, to 2K bytes. Expanded buffer size enables more stable automatic operation by drip feed, in moderately demanding machining applications.

Benefits

- Expanded buffer capacity prevents intermittent delays or loss of RS-232 serial data during operation or storage

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------|
| A02B-0323-R511 | 30i-B Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0326-R511 | 31i-B5 Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0327-R511 | 31i-B Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0328-R511 | 32i-B Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0353-R511 | 30i-BP Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0356-R511 | 31i-B5P Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0357-R511 | 31i-BP Reader / Puncher Interface Expansion of Receiving Buffer |
| A02B-0358-R511 | 32i-BP Reader / Puncher Interface Expansion of Receiving Buffer |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

619

Data Input/Output

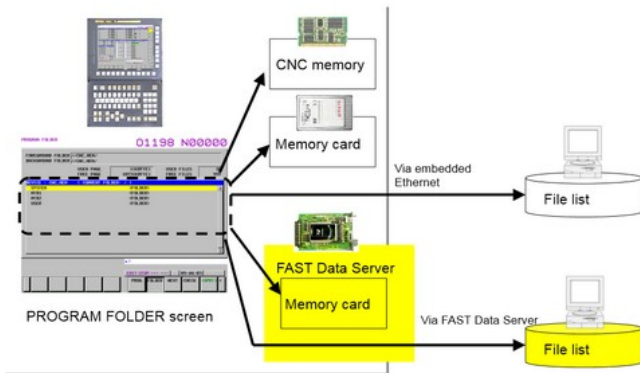

Fast Data Server

Features

The Data Server / Fast Data Server consists of an embedded memory card and an Ethernet connection on the CNC. The Data Server allows files to be transferred from a host computer to the CNC memory, or to the memory card on the Data server. Part programs may also be executed directly either from the network or the Compact Flash card on the Data Server.

Benefits

- Manage part programs for multiple machines at a central location.
- Store and reliably execute large part programs without taking up part program storage on the CNC.

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------|
| A02B-0323-S737 | 30i-B Data Server Function - Incl. Data Server Buffer Mode |
| A02B-0326-S737 | 31i-B5 Data Server Function - Incl. Data Server Buffer Mode |
| A02B-0327-S737 | 31i-B Data Server Function - Incl. Data Server Buffer Mode |
| A02B-0328-S737 | 32i-B Data Server Function - Incl. Data Server Buffer Mode |
| A02B-0339-S737 | 0i-TF Data Server Function |
| A02B-0340-S737 | 0i-MF Data Server Function |
| A02B-0349-S737 | 0i-TFP Data Server Function |
| A02B-0350-S737 | 0i-MFP Data Server Function |
| A02B-0353-S737 | 30i-BP Data Server Function |
| A02B-0356-S737 | 31i-B5P Data Server Function |
| A02B-0357-S737 | 31i-BP Data Server Function |
| A02B-0358-S737 | 32i-BP Data Server Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

620

Data Input/Output

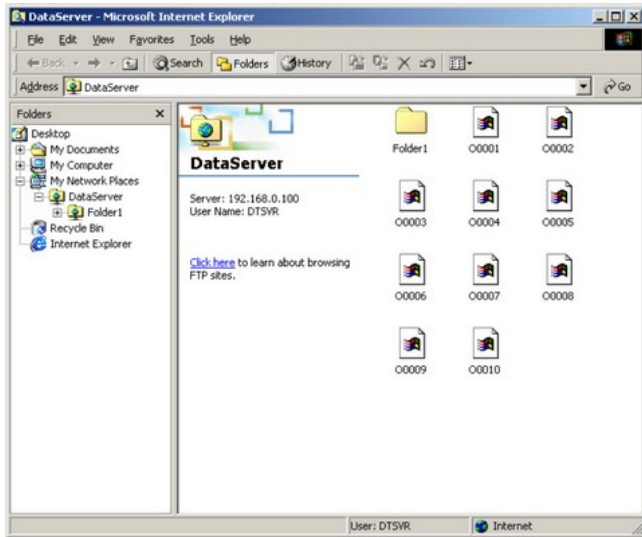

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Data Server Explorer Connection

Features

The following functions are added to FTP Server function of Data Server.

- Increase of FTP Server connections.
- Connection with Windows Explorer
- Addition of maintenance screen for FTP server

Benefits

- Simplification of the handling of large program over FTP
- Improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------|
| A02B-0323-R953 | 30i-B Data Server Explorer Connection Function |
| A02B-0326-R953 | 31i-B5 Data Server Explorer Connection Function |
| A02B-0327-R953 | 31i-B Data Server Explorer Connection Function |
| A02B-0328-R953 | 32i-B Data Server Explorer Connection Function |
| A02B-0339-R953 | 0i-TF Data Server Explorer Connection Function |
| A02B-0340-R953 | 0i-MF Data Server Explorer Connection Function |
| A02B-0349-R953 | 0i-TFP Data Server Explorer Connection Function |
| A02B-0350-R953 | 0i-MFP Data Server Explorer Connection Function |
| A02B-0353-R953 | 30i-BP Data Server Explorer Connection Function |
| A02B-0356-R953 | 31i-B5P Data Server Explorer Connection Function |
| A02B-0357-R953 | 31i-BP Data Server Explorer Connection Function |
| A02B-0358-R953 | 32i-BP Data Server Explorer Connection Function |

621

Data Input/Output

External Tool Offset

Features

The External Tool Offset function provides signals for changing the tool compensation value via the PMC. When the offset number is specified by a part program, data input from the PMC is added to the offset value. The offset value can also be used as input data itself by specifying the input signal.

If the tool compensation value is externally input when offset number 0 specified in a part program (an offset cancel) in the lathe turning machine, the workpiece coordinate system shifts by the entered quantity.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplification of the machine operation
- Improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------|
| A02B-0323-J910 | 30i-B External Tool Offset |
| A02B-0326-J910 | 31i-B5 External Tool Offset |
| A02B-0327-J910 | 31i-B External Tool Offset |
| A02B-0328-J910 | 32i-B External Tool Offset |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

622

Data Input/Output

External Machine Zero Point Shift

Features

The machine coordinate system can be externally shifted by inputting a shift value.

When the shift value is input, compensation is immediately applied to the corresponding axis and the axis moves. The position accuracy can be improved by combining this function with sensors.

The specification to shift the axis is the same as the external workpiece coordinate system shift. The compensation value is specified in signals ED0 to ED15 using a binary code ranging from 0 to ± 9999 . This compensation value must be specified in absolute value. The value that the machine actually moves at input is the difference from the previously stored value.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplification of the machine operation
- Improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|------------------------------------------|
| A02B-0323-J912 | 30i-B External Machine Zero Point Shift |
| A02B-0326-J912 | 31i-B5 External Machine Zero Point Shift |
| A02B-0327-J912 | 31i-B External Machine Zero Point Shift |
| A02B-0328-J912 | 32i-B External Machine Zero Point Shift |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

623

Data Input/Output

External Message

Features

The external operator message function allows the transfer of messages for the operator from the PMC to the CNC display screen. The operator messages can be cleared by the PMC. Up to 256 characters can be sent in a single operator message, or up to 4 messages of 63 characters can be displayed at the same time. A parameter setting controls the range of the message numbers and their display form.

- When the parameter is set to 0
The message numbers 0 to 999 can be sent. The message numbers 0 to 99 are displayed along with the message. To distinguish these alarms from other alarms, the CNC displays them by adding 2000 to an alarm number. When a message from 100 to 999 is displayed, the message number is not displayed; only its text is displayed.
- When the parameter is set to 1
The message numbers 0 to 4095 can be sent. The message numbers 0 to 99 are displayed along with the message. The CNC displays them with prefix characters 'EX' to an alarm for display. When a message number from 100 to 4095 is displayed, the message number is not displayed; only its text is displayed.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplification of the machine operation
- Improvement of the communication with the operator
- Improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0323-J911 | 30i-B External Message |
| A02B-0326-J911 | 31i-B5 External Message |
| A02B-0327-J911 | 31i-B External Message |
| A02B-0328-J911 | 32i-B External Message |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

624

Data Input/Output

External Data Input

Features

The External Data Input function is a collection of options that enables the PMC to send data to the CNC to perform a desired operation. The external data input function includes the following capabilities:

- External tool offset - Changing the tool offset value from the PMC.
- External program number search - Selecting the part program number to activate by the PMC.
- External workpiece coordinate system shift - Modifying the shift value by the PMC.
- External machine zero point shift - Shifting the machine zero point on an axis by the PMC.
- Extended external machine zero point shift - Shifting the machine zero point on all axes by PMC.
- External alarm message -The PMC can send an ALARM message to the CNC.
- External operator message -The PMC can send an Operator message to the CNC
- Assignment of machined parts count and required parts count data -The PMC can preset the required parts count and machined parts count to a value in the range 0 to 9999.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Simplification of the machine operation
- Improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0323-J913 | 30i-B External Data Input - Incl. External Message, External Tool Offset, External Machine Zero Point Shift, External Program Number Search |
| A02B-0326-J913 | 31i-B5 External Data Input - Incl. External Message, External Tool Offset, External Machine Zero Point Shift, External Program Number Search |
| A02B-0327-J913 | 31i-B External Data Input - Incl. External Message, External Tool Offset, External Machine Zero Point Shift, External Program Number Search |
| A02B-0328-J913 | 32i-B External Data Input - Incl. External Message, External Tool Offset, External Machine Zero Point Shift, External Program Number Search |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

625

Data Input/Output

Power Mate CNC Manager

Features

When the servo amplifier unit is used as an additional (slave) axis of the CNC, the power mate CNC manager enables the display and setting of data from the CNC. Up to eight slave units can be connected.

The Power Mate CNC manager supports the following functions:

- Current position display (absolute/machine coordinate)
- Parameter display and setting
- Diagnosis
- System configuration screen
- Alarm

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Cost effective way to configure/drive auxilliary axis

Ordering Information

| Specification | Description |
|----------------|-------------------------------|
| A02B-0323-J674 | 30i-B Power Mate CNC Manager |
| A02B-0326-J674 | 31i-B5 Power Mate CNC Manager |
| A02B-0327-J674 | 31i-B Power Mate CNC Manager |
| A02B-0328-J674 | 32i-B Power Mate CNC Manager |
| A02B-0333-J674 | 35i-B Power Mate CNC Manager |
| A02B-0334-J674 | PM i-A Power Mate CNC Manager |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

626

Data Input/Output

External I/O Device Control

Features

Part program registration and punch can be commanded externally.

This function is a basic function in FANUC Series 30i-B Plus and in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Operator can conveniently upload/download part programs from host device
- No need to push read/punch button on CNC
- Read/Punch can be activated by external device such as from enter button on laptop
- Permits better part program control from CAM room
- Easy to maintain one master part program

Ordering Information

| Specification | Description |
|----------------|------------------------------------|
| A02B-0323-J902 | 30i-B External I/O Device Control |
| A02B-0326-J902 | 31i-B5 External I/O Device Control |
| A02B-0327-J902 | 31i-B External I/O Device Control |
| A02B-0328-J902 | 32i-B External I/O Device Control |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

627

Data Input/Output

One Touch Macro Call

Features

This function enables the CNC to perform a complex macro operation at the push of a button.

By pressing a switch on the machine, the following three operations can be performed with minimum ladder modifications:

- Switching to the MEM mode.
- Execution of macro programs stored in memory.
- Return to the mode before execution. The program selected before execution is automatically selected.

This function is enabled only in the reset state. This means that this function cannot be used during automatic operation (during automatic operation halt and automatic operation stop periods as well).

This function is a basic function in FANUC Series 0i-MF Plus and 0i-LF Plus.

Benefits

- Simplification of the machine operation
- Improvement of the machining productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0323-S655 | 30i-B One Touch Macro Call Function |
| A02B-0326-S655 | 31i-B5 One Touch Macro Call Function |
| A02B-0327-S655 | 31i-B One Touch Macro Call Function |
| A02B-0328-S655 | 32i-B One Touch Macro Call Function |
| A02B-0339-S655 | 0i-TF One Touch Macro Call Function |
| A02B-0340-S655 | 0i-MF One Touch Macro Call Function |
| A02B-0349-S655 | 0i-TFP One-Touch Macro Call Function |
| A02B-0350-S655 | 0i-MFP One-Touch Macro Call Function |
| A02B-0353-S655 | 30i-BP One Touch Macro Call Function |
| A02B-0356-S655 | 31i-B5P One Touch Macro Call Function |
| A02B-0357-S655 | 31i-BP One Touch Macro Call Function |
| A02B-0358-S655 | 32i-BP One Touch Macro Call Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

628

Data Input/Output

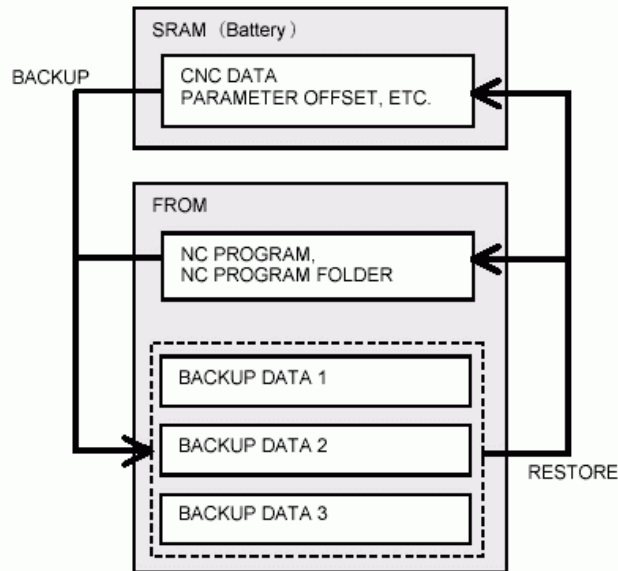

Automatic Data Backup

Features

Enables automatic backup of battery-backed SRAM memory contents to the control's Flash ROM memory. In the event of SRAM memory loss, maintenance personnel can immediately recover data from a saved backup.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Up to three backup copies can be made/maintained.
- Backup may be performed at set interval and/or when E-Stop occurs.
- One backup copy may be protected for saving of original data/settings.
- Backup of CNC part programs in FROM memory may be included.

Ordering Information

| Specification | Description |
|--------------------|-----------------------------------------------------------------------------|
| A02B-0323-H510#B10 | 30i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM |
| A02B-0323-H510#B11 | 30i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM + Part Programs |
| A02B-0323-H510#B20 | 30i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM |
| A02B-0323-H510#B21 | 30i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0323-H510#B30 | 30i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM |
| A02B-0323-H510#B31 | 30i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0326-H510#B10 | 31i-B5 Automatic Data Back-up, 1 Set of Back-up Data, SRAM |
| A02B-0326-H510#B11 | 31i-B5 Automatic Data Back-up, 1 Set of Back-up Data, SRAM + Part Programs |
| A02B-0326-H510#B20 | 31i-B5 Automatic Data Back-up, 2 Sets of Back-up Data, SRAM |
| A02B-0326-H510#B21 | 31i-B5 Automatic Data Back-up, 2 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0326-H510#B30 | 31i-B5 Automatic Data Back-up, 3 Sets of Back-up Data, SRAM |
| A02B-0326-H510#B31 | 31i-B5 Automatic Data Back-up, 3 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0327-H510#B10 | 31i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM |
| A02B-0327-H510#B11 | 31i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM + Part Programs |
| A02B-0327-H510#B20 | 31i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM |
| A02B-0327-H510#B21 | 31i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0327-H510#B30 | 31i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM |
| A02B-0327-H510#B31 | 31i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0328-H510#B10 | 32i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM |
| A02B-0328-H510#B11 | 32i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM + Part Programs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|--------------------|-----------------------------------------------------------------------------|
| A02B-0328-H510#B20 | 32i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM |
| A02B-0328-H510#B21 | 32i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0328-H510#B30 | 32i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM |
| A02B-0328-H510#B31 | 32i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0333-H510#B10 | 35i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM |
| A02B-0333-H510#B11 | 35i-B Automatic Data Back-up, 1 Set of Back-up Data, SRAM + Part Programs |
| A02B-0333-H510#B20 | 35i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM |
| A02B-0333-H510#B21 | 35i-B Automatic Data Back-up, 2 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0333-H510#B30 | 35i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM |
| A02B-0333-H510#B31 | 35i-B Automatic Data Back-up, 3 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0334-H510#B10 | PM i-A Automatic Data Back-up, 1 Set of Back-up Data, SRAM |
| A02B-0334-H510#B11 | PM i-A Automatic Data Back-up, 1 Set of Back-up Data, SRAM + Part Programs |
| A02B-0334-H510#B20 | PM i-A Automatic Data Back-up, 2 Sets of Back-up Data, SRAM |
| A02B-0334-H510#B21 | PM i-A Automatic Data Back-up, 2 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0334-H510#B30 | PM i-A Automatic Data Back-up, 3 Sets of Back-up Data, SRAM |
| A02B-0334-H510#B31 | PM i-A Automatic Data Back-up, 3 Sets of Back-up Data, SRAM + Part Programs |
| A02B-0353-H510#B10 | 30i-BP Automatic Data Back-up - 1 Set SRAM Data |
| A02B-0353-H510#B11 | 30i-BP Automatic Data Back-up - 1 Set SRAM Data + CNC Programs |
| A02B-0353-H510#B20 | 30i-BP Automatic Data Back-up - 2 Sets SRAM Data |
| A02B-0353-H510#B21 | 30i-BP Automatic Data Back-up - 2 Sets SRAM Data + CNC Programs |
| A02B-0353-H510#B30 | 30i-BP Automatic Data Back-up - 3 Sets SRAM Data |
| A02B-0353-H510#B31 | 30i-BP Automatic Data Back-up - 3 Sets SRAM Data + CNC Programs |
| A02B-0356-H510#B10 | 31i-B5P Automatic Data Back-up - 1 Set SRAM Data |
| A02B-0356-H510#B11 | 31i-B5P Automatic Data Back-up - 1 Set SRAM Data + CNC Programs |
| A02B-0356-H510#B20 | 31i-B5P Automatic Data Back-up - 2 Sets SRAM Data |
| A02B-0356-H510#B21 | 31i-B5P Automatic Data Back-up - 2 Sets SRAM Data + CNC Programs |
| A02B-0356-H510#B30 | 31i-B5P Automatic Data Back-up - 3 Sets SRAM Data |
| A02B-0356-H510#B31 | 31i-B5P Automatic Data Back-up - 3 Sets SRAM Data + CNC Programs |
| A02B-0357-H510#B10 | 31i-BP Automatic Data Back-up - 1 Set SRAM Data |
| A02B-0357-H510#B11 | 31i-BP Automatic Data Back-up - 1 Set SRAM Data + CNC Programs |
| A02B-0357-H510#B20 | 31i-BP Automatic Data Back-up - 2 Sets SRAM Data |
| A02B-0357-H510#B21 | 31i-BP Automatic Data Back-up - 2 Sets SRAM Data + CNC Programs |
| A02B-0357-H510#B30 | 31i-BP Automatic Data Back-up - 3 Sets SRAM Data |
| A02B-0357-H510#B31 | 31i-BP Automatic Data Back-up - 3 Sets SRAM Data + CNC Programs |
| A02B-0358-H510#B10 | 32i-BP Automatic Data Back-up - 1 Set SRAM Data |
| A02B-0358-H510#B11 | 32i-BP Automatic Data Back-up - 1 Set SRAM Data + CNC Programs |
| A02B-0358-H510#B20 | 32i-BP Automatic Data Back-up - 2 Sets SRAM Data |
| A02B-0358-H510#B21 | 32i-BP Automatic Data Back-up - 2 Sets SRAM Data + CNC Programs |
| A02B-0358-H510#B30 | 32i-BP Automatic Data Back-up - 3 Sets SRAM Data |
| A02B-0358-H510#B31 | 32i-BP Automatic Data Back-up - 3 Sets SRAM Data + CNC Programs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

630

Data Input/Output

Continuous Positional Data Output Function

Features

The Continuous Positional Data Output Function provides FOCAS2 functions which sample machine position data of CNC axes and pass them on to a PC connected by HSSB. The machine position can be continuously sampled with 1msec sampling frequency. When the high-speed skip signal is input during sampling, the delay time between the sampling of the machine position and the high-speed skip is recorded together with the respective sampling point.

Scanning systems can utilize the measured machine position data to provide 3-dimensional point data for measured parts. The 1msec sampling frequency allows a high surface data density.

Benefits

- Integrate scanning systems into your machine tool

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-J989 | 30i-B Continuous Positional Data Output Function |
| A02B-0326-J989 | 31i-B5 Continuous Positional Data Output Function |
| A02B-0327-J989 | 31i-B Continuous Positional Data Output Function |
| A02B-0328-J989 | 32i-B Continuous Positional Data Output Function |
| A02B-0353-J989 | 30i-BP Continuous Positional Data Output Function |
| A02B-0356-J989 | 31i-B5P Continuous Positional Data Output Function |
| A02B-0357-J989 | 31i-BP Continuous Positional Data Output Function |
| A02B-0358-J989 | 32i-BP Continuous Positional Data Output Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

631

Functions

PMC System

This section of the catalogue contains the functions related to the Programmable Machine Controller (PMC) which is a Programmable Logic Controller integrated in the CNC.

Some of the functions detailed in the catalogue:

- General overview
- Multi-path PMC
- Symbols and messaging
- Step sequence
- Function Blocks
- Etc.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

632

PMC System

PMC Ladder Function

Features

The Programmable Machine Controller (PMC) which is integrated in the CNC is sizable to match the requirement of the machine.

PMC program sizes of up to 300,000 steps (depending on the CNC model) can be defined. Please refer to the ordering information to identify the sizes available per CNC model.

Benefits

- Customization of the PMC program size
- Adaptation to the machine and process requirements

Ordering Information

| Specification | Description |
|---------------------|--------------------------------------------------------------------------------------------|
| A02B-0323-H990#100K | 30i-B 1st-Path PMC Ladder Function, 100000 Steps |
| A02B-0323-H990#300K | 30i-B 1st Path PMC Ladder Function 300000 Steps |
| A02B-0323-H990#32K | 30i-B 1st-Path PMC Ladder Function, 32000 Steps, up to 384 kB of Total PMC Program Memory |
| A02B-0323-H990#64K | 30i-B 1st-Path PMC Ladder Function, 64000 Steps, up to 768 kB of Total PMC Program Memory |
| A02B-0326-H990#100K | 31i-B5 1st-Path PMC Ladder Function, 100000 Steps |
| A02B-0326-H990#300K | 31i-B5 1st Path PMC Ladder Function 300000 Steps |
| A02B-0326-H990#32K | 31i-B5 1st Path PMC Ladder Function, 32000 Steps, up to 384 kB of total PMC Program Memory |
| A02B-0326-H990#64K | 31i-B5 1st Path PMC Ladder Function, 64000 Steps, up to 768 kB of total PMC Program Memory |
| A02B-0327-H990#100K | 31i-B 1st-Path PMC Ladder Function, 100000 Steps |
| A02B-0327-H990#300K | 31i-B 1st Path PMC Ladder Function, 300000 Steps |
| A02B-0327-H990#32K | 31i-B 1st-Path PMC Ladder Function, 32000 Steps, up to 384 kB of total PMC Program Memory |
| A02B-0327-H990#64K | 31i-B 1st Path PMC Ladder Function, 64000 Steps, up to 768 kB of total PMC Program Memory |
| A02B-0328-H990#100K | 32i-B 1st-Path PMC Ladder Function, 100000 Steps |
| A02B-0328-H990#300K | 32i-B 1st Path PMC Ladder Function, 300000 steps |
| A02B-0328-H990#32K | 32i-B 1st-Path PMC Ladder Function, 32000 Steps, up to 384 kB of total PMC Program Memory |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|---------------------|-------------------------------------------------------------------------------------------|
| A02B-0328-H990#64K | 32i-B 1st-Path PMC Ladder Function, 64000 Steps, up to 768 kB of total PMC Program Memory |
| A02B-0333-H990#100K | 35i-B 1st-Path PMC Ladder Function, 100000 Steps |
| A02B-0333-H990#300K | 35i-B 1st Path PMC Ladder Function, 300000 steps |
| A02B-0333-H990#32K | 35i-B 1st-Path PMC Ladder Function, 32000 Steps, up to 384 kB of Total PMC Program Memory |
| A02B-0333-H990#64K | 35i-B 1st-Path PMC Ladder Function, 64000 Steps, up to 768 kB of Total PMC Program Memory |
| A02B-0334-H990#100K | PM i-A PMC Ladder Function, 100000 Steps, 1 MB Program Memory |
| A02B-0334-H990#300K | PM i-A PMC Ladder Function, 300000 Steps, 3 MB PMC Program Memory |
| A02B-0334-H990#32K | PM i-A PMC Ladder Function, 32000 Steps, 384 kB PMC Program Memory |
| A02B-0334-H990#64K | PM i-A PMC Ladder Function, 64000 Steps, 768 kB PMC Program Memory |
| A02B-0339-H990#100K | 0i-TF PMC Ladder Function 100000 Steps |
| A02B-0339-H990#24K | 0i-TF PMC Ladder Function 24000 Steps |
| A02B-0339-H990#32K | 0i-TF PMC Ladder Function 32000 Steps |
| A02B-0339-H990#64K | 0i-TF PMC Ladder Function 64000 Steps |
| A02B-0339-H990#8K | 0i-TF PMC Ladder Function 8000 Steps |
| A02B-0340-H990#100K | 0i-MF PMC Ladder Function: 100000 Steps |
| A02B-0340-H990#24K | 0i-MF Type 3 PMC Ladder Function, 24000 Steps |
| A02B-0340-H990#32K | 0i-MF PMC Ladder Function: 32000 Steps |
| A02B-0340-H990#64K | 0i-MF PMC Ladder Function: 64000 Steps |
| A02B-0340-H990#8K | 0i-MF Type 3 PMC Ladder Function, 8000 Steps |
| A02B-0349-H990#100K | 0i-TFP PMC Ladder Function 100000 Steps |
| A02B-0349-H990#32K | 0i-TFP PMC Ladder Function 32000 Steps |
| A02B-0349-H990#64K | 0i-TFP PMC Ladder Function 64000 Steps |
| A02B-0350-H990#100K | 0i-MFP PMC Ladder Function 100000 Steps |
| A02B-0350-H990#32K | 0i-MFP PMC Ladder Function 32000 Steps |
| A02B-0350-H990#64K | 0i-MFP PMC Ladder Function 64000 Steps |
| A02B-0353-H990#100K | 30i-BP PMC LADDER Function 100,000 Steps |
| A02B-0353-H990#300K | 30i-BP PMC LADDER Function 300,000 Steps |
| A02B-0353-H990#32K | 30i-BP PMC LADDER Function 32,000 Steps |
| A02B-0353-H990#64K | 30i-BP PMC LADDER Function 64,000 Steps |
| A02B-0356-H990#100K | 31i-B5P PMC LADDER Function 100,000 Steps |
| A02B-0356-H990#300K | 31i-B5P PMC LADDER Function 300,000 Steps |
| A02B-0356-H990#32K | 31i-B5P PMC LADDER Function 32,000 Steps |
| A02B-0356-H990#64K | 31i-B5P PMC LADDER Function 64,000 Steps |
| A02B-0357-H990#100K | 31i-BP PMC LADDER Function 100,000 Steps |
| A02B-0357-H990#300K | 31i-BP PMC LADDER Function 300,000 Steps |
| A02B-0357-H990#32K | 31i-BP PMC LADDER Function 32,000 Steps |
| A02B-0357-H990#64K | 31i-BP PMC LADDER Function 64,000 Steps |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

634

| Specification | Description |
|---------------------|------------------------------------------|
| A02B-0358-H990#100K | 32i-BP PMC LADDER Function 100,000 Steps |
| A02B-0358-H990#300K | 32i-BP PMC LADDER Function 300,000 Steps |
| A02B-0358-H990#32K | 32i-BP PMC LADDER Function 32,000 Steps |
| A02B-0358-H990#64K | 32i-BP PMC LADDER Function 64,000 Steps |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

635

PMC System

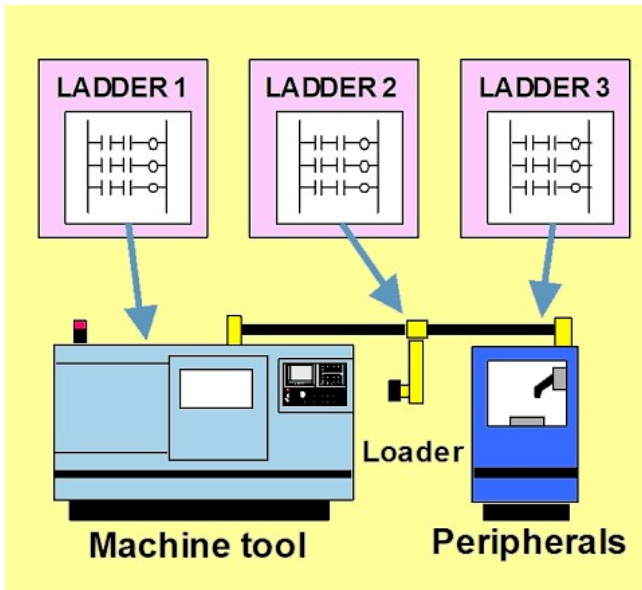

Multi-Path PMC Function

Features

The Programmable Machine Controller (PMC) usually runs one single program. In order to extend the processing capabilities of the PMC, it is possible to increase the number of concurrent PMC programs running at the same time to 3 or 5.

Each of the program or path can exchange data with the other paths using shared data and can control specific parts of the process. For instance, one path can be allocated to the machine itself, one to the auxiliary functions and the 3rd one to the loading / unloading system.

Benefits

- Increase of the processing and structuring capacity of the PMC
- Possibility to associate separate PMC paths with process sub-systems
- Simplification of the maintenance of the machine
- Possibility to design the PMC programs with different developers teams

Ordering Information

| Specification | Description |
|------------------|------------------------------------------|
| A02B-0323-R855#3 | 30i-B Multi-Path PMC Function (3 Paths) |
| A02B-0323-R855#5 | 30i-B Multi-Path PMC Function (5 Paths) |
| A02B-0326-R855#3 | 31i-B5 Multi-Path PMC Function (3 Paths) |
| A02B-0326-R855#5 | 31i-B5 Multi-Path PMC Function (5 Paths) |
| A02B-0327-R855#3 | 31i-B Multi-Path PMC Function (3 Paths) |
| A02B-0327-R855#5 | 31i-B Multi-Path PMC Function (5 Paths) |
| A02B-0328-R855#3 | 32i-B Multi-Path PMC Function (3 Paths) |
| A02B-0328-R855#5 | 32i-B Multi-Path PMC Function (5 Paths) |
| A02B-0333-R855#3 | 35i-B Multi-Path PMC Function (3 Paths) |
| A02B-0333-R855#5 | 35i-B Multi-Path PMC Function (5 Paths) |
| A02B-0334-R855#3 | PM i-A Multi-Path PMC Function (3 Paths) |
| A02B-0334-R855#5 | PM i-A Multi-Path PMC Function (5 Paths) |
| A02B-0339-R855#3 | 0i-TF Multi-Path PMC Function (3 Paths) |
| A02B-0340-R855#3 | 0i-MF Multi-Path PMC Function (3 Paths) |
| A02B-0349-R855#3 | 0i-TFP Multi-Path PMC Function: 3 Paths |
| A02B-0350-R855#3 | 0i-MFP Multi-Path PMC Function: 3 Paths |
| A02B-0353-R855#3 | 30i-BP Multi-Path PMC Function - 3 Paths |
| A02B-0353-R855#5 | 30i-BP Multi-Path PMC Function - 5 Paths |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

636

| Specification | Description |
|------------------|-------------------------------------------|
| A02B-0356-R855#3 | 31i-B5P Multi-Path PMC Function - 3 Paths |
| A02B-0356-R855#5 | 31i-B5P Multi-Path PMC Function - 5 Paths |
| A02B-0357-R855#3 | 31i-BP Multi-Path PMC Function - 3 Paths |
| A02B-0357-R855#5 | 31i-BP Multi-Path PMC Function - 5 Paths |
| A02B-0358-R855#3 | 32i-BP Multi-Path PMC Function - 3 Paths |
| A02B-0358-R855#5 | 32i-BP Multi-Path PMC Function - 5 Paths |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

637 PMC System



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

PMC Symbol, Comment and Message Capacity Expansion

Features

When the Extension of Symbols, Comments and Messages area is used, it is possible to:

- Use local symbols in sub programs: local symbols are then only effective in a sub program. In this case the same string does not conflict with other same strings in other sub-programs
- Extend the maximum character length of symbols (40 instead of 16) and comments (4 sets of 255 characters instead of 1 set of 30)
- Support multi-language: one symbol entry can have up to four comment sets in maximum and the switch of the comment language is synchronized to the general switch of language of the CNC.
- Multi-definition of symbol and comment to one signal
- Data type definition (BOOL, BYTE, WORD, LABEL, PROG, etc.) can be associated to the symbol and comment
- Extension of the character set used in the symbols and comment

This function is a basic function in FANUC Series 30i-B Plus (512kB) and in FANUC Series 0i-F and 0i-F Plus (512kB).

Benefits

- Increase of the capacity to handle messages and symbols
- Simplification of the maintenance tasks with the multi-language comments

Ordering Information

| Specification | Description |
|---------------------|-------------------------------------------------------------------|
| A02B-0323-R856#1M | 30i-B PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0323-R856#2M | 30i-B PMC Symbol, Comment and Message Capacity Expansion: 2 MB |
| A02B-0323-R856#512K | 30i-B PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0326-R856#1M | 31i-B5 PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0326-R856#2M | 31i-B5 PMC Symbol, Comment and Message Capacity Expansion: 2 MB |
| A02B-0326-R856#512K | 31i-B5 PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0327-R856#1M | 31i-B PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0327-R856#2M | 31i-B PMC Symbol, Comment and Message Capacity Expansion: 2 MB |
| A02B-0327-R856#512K | 31i-B PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0328-R856#1M | 32i-B PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0328-R856#2M | 32i-B PMC Symbol, Comment and Message Capacity Expansion: 2 MB |
| A02B-0328-R856#512K | 32i-B PMC Symbol, Comment and Message Capacity Expansion: 512 kB |

| Specification | Description |
|---------------------|-------------------------------------------------------------------|
| A02B-0333-R856#1M | 35i-B PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0333-R856#2M | 35i-B PMC Symbol, Comment and Message Capacity Expansion: 2 MB |
| A02B-0333-R856#512K | 35i-B PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0334-R856#1M | PM i-A PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0334-R856#2M | PM i-A PMC Symbol, Comment and Message Capacity Expansion: 2 MB |
| A02B-0334-R856#512K | PM i-A PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0339-R856#1M | 0i-TF PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0339-R856#512K | 0i-TF PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0340-R856#1M | 0i-MF PMC Symbol, Comment and Message Capacity Expansion: 1 MB |
| A02B-0340-R856#512K | 0i-MF PMC Symbol, Comment and Message Capacity Expansion: 512 kB |
| A02B-0349-R856#1M | 0i-TFP PMC Symbol, Comment & Message Capacity (1 MB) |
| A02B-0350-R856#1M | 0i-MFP PMC Symbol, Comment & Message Capacity (1 MB) |
| A02B-0353-R856#1M | 30i-BP PMC Symbol, Comment and Message Capacity Expansion - 1 MB |
| A02B-0353-R856#2M | 30i-BP PMC Symbol, Comment and Message Capacity Expansion - 2 MB |
| A02B-0356-R856#1M | 31i-B5P PMC Symbol, Comment and Message Capacity Expansion - 1 MB |
| A02B-0356-R856#2M | 31i-B5P PMC Symbol, Comment and Message Capacity Expansion - 2 MB |
| A02B-0357-R856#1M | 31i-BP PMC Symbol, Comment and Message Capacity Expansion - 1 MB |
| A02B-0357-R856#2M | 31i-BP PMC Symbol, Comment and Message Capacity Expansion - 2 MB |
| A02B-0358-R856#1M | 32i-BP PMC Symbol, Comment and Message Capacity Expansion - 1 MB |
| A02B-0358-R856#2M | 32i-BP PMC Symbol, Comment and Message Capacity Expansion - 2 MB |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

639

PMC System

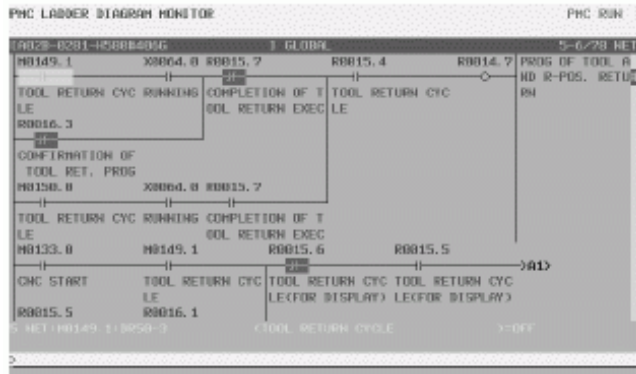

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Step Sequence Function

Features

The standard PMC programming style on FANUC CNC is the Ladder Programming. This ladder language has been available since many years, and always improved to match the growing demand in complexity.

The ladder method is most often used for programming the sequence control governed by a programmable controller. This method was derived from relay-panel control circuits. Since it has been in use for years, many sequence control engineers are already familiar with it. This method is also used in PMC sequence programming.

A large-scale system requires a large program and a greater number of processes, to control the overall process. In addition optional step sequence method is available for some PMC models, to describe the order/flow of the overall process (see image).


Step sequence

Step sequence method has been created to describe programs structurally. It is well-suited to the control of entire processes and provides an easy-to-understand visualized flow of the process. The step sequence programming features the direct representation of the control flow on a flow chart. Each block of processing is described as a subprogram, using the ladder method. The entire program is then created by combining these subprograms.

In step sequence programming, a sequence control program is divided into two types of subprograms, steps and transitions. Steps describe processes. Transitions connect steps and determine whether the transition conditions from one step to another evaluate true.

Step Sequence is also called Structure Function Charts (SFC) or Gracet.

640

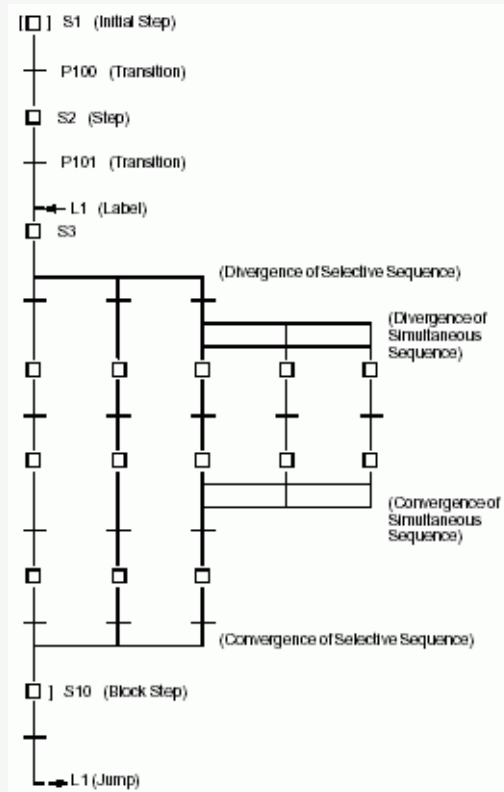

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0323-S982 | 30i-B Step Sequence Function |
| A02B-0326-S982 | 31i-B5 Step Sequence Function |
| A02B-0327-S982 | 31i-B Step Sequence Function |
| A02B-0328-S982 | 32i-B PMC Step Sequence Function |
| A02B-0333-S982 | 35i-B PMC Step Sequence Function |
| A02B-0334-S982 | PM i-A Step Sequence Function |
| A02B-0339-S982 | 0i-TF PMC Step Sequence Function |
| A02B-0340-S982 | 0i-MF PMC Step Sequence Function |
| A02B-0349-S982 | 0i-TFP PMC Step Sequence Function |
| A02B-0350-S982 | 0i-MFP PMC Step Sequence Function |
| A02B-0353-S982 | 30i-BP Step Sequence Function |
| A02B-0356-S982 | 31i-B5P Step Sequence Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

641

| Specification | Description |
|----------------|-------------------------------|
| A02B-0357-S982 | 31i-BP Step Sequence Function |
| A02B-0358-S982 | 32i-BP Step Sequence Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

642

PMC System

Nonvolatile PMC Extra Relay Function

Features

This function increases the number of nonvolatile relays available in the PMC to 10 kB

Benefits

- Increase of the capabilities to handle data to accommodate larger machines

Ordering Information

| Specification | Description |
|--------------------|----------------------------------------------------|
| A02B-0323-S984#10K | 30i-B PMC Nonvolatile Extra Relay Function, 10 kB |
| A02B-0326-S984#10K | 31i-B5 PMC Nonvolatile Extra Relay Function, 10 kB |
| A02B-0327-S984#10K | 31i-B PMC Nonvolatile Extra Relay Function, 10 kB |
| A02B-0328-S984#10K | 32i-B PMC Nonvolatile Extra Relay Function, 10 kB |
| A02B-0333-S984#10K | 35i-B PMC Nonvolatile Extra Relay Function, 10 kB |
| A02B-0334-S984#10K | PM i-A PMC Nonvolatile Extra Relay Function, 10 kB |
| A02B-0339-S984#10K | 0i-TF Nonvolatile PMC Extra Relay Function |
| A02B-0340-S984#10K | 0i-MF Nonvolatile PMC Extra Relay Function |
| A02B-0349-S984#10K | 0i-TFP Nonvolatile PMC Extra Relay Function |
| A02B-0350-S984#10K | 0i-MFP Nonvolatile PMC Extra Relay Function |
| A02B-0353-S984#10K | 30i-BP Nonvolatile PMC Extra Relay Function |
| A02B-0356-S984#10K | 31i-B5P Nonvolatile PMC Extra Relay Function |
| A02B-0357-S984#10K | 31i-BP Nonvolatile PMC Extra Relay Function |
| A02B-0358-S984#10K | 32i-BP Nonvolatile PMC Extra Relay Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

643

PMC System

Nonvolatile PMC Data Table Area Expansion (40kB)

Features

This function increases the number of nonvolatile data table available in the PMC to 40 kB

Benefits

- Increase of the capabilities to handle data to accommodate larger machines

Ordering Information

| Specification | Description |
|--------------------|-----------------------------------------------------------|
| A02B-0323-S967#40K | 30i-B PMC Nonvolatile Data Table Expansion, 40 kB |
| A02B-0326-S967#40K | 31i-B5 PMC Nonvolatile Data Table Expansion, 40 kB |
| A02B-0327-S967#40K | 31i-B PMC Nonvolatile Data Table Area Expansion, 40 kB |
| A02B-0328-S967#40K | 32i-B PMC Nonvolatile Data Table Expansion, 40 kB |
| A02B-0333-S967#40K | 35i-B PMC Nonvolatile Data Table Expansion, 40 kB |
| A02B-0334-S967#40K | PM i-A PMC Nonvolatile Data Table Area Expansion, 40 kB |
| A02B-0339-S967#40K | 0i-TF Nonvolatile PMC Data Table Area Expansion 40 kB |
| A02B-0340-S967#40K | 0i-MF Nonvolatile PMC Data Table Area Expansion 40 kB |
| A02B-0349-S967#40K | 0i-TFP Nonvolatile PMC Data Table Area Expansion (40 kB) |
| A02B-0350-S967#40K | 0i-MFP Nonvolatile PMC Data Table Area Expansion (40 kB) |
| A02B-0353-S967#40K | 30i-BP Nonvolatile PMC Data Table Area Expansion - 40 kB |
| A02B-0356-S967#40K | 31i-B5P Nonvolatile PMC Data Table Area Expansion - 40 kB |
| A02B-0357-S967#40K | 31i-BP Nonvolatile PMC Data Table Area Expansion - 40 kB |
| A02B-0358-S967#40K | 32i-BP Nonvolatile PMC Data Table Area Expansion - 40 kB |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

644

PMC System

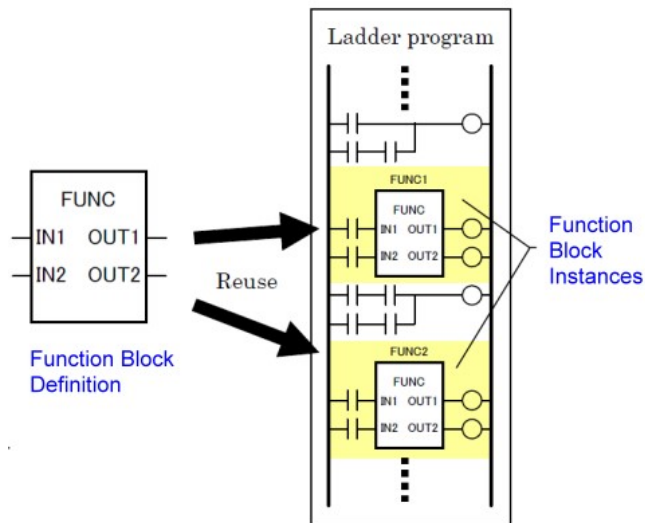

PMC Function Block Function

Features

A Function Block (also called FB) is a block of a Ladder Program defined in advance in a library that contains a particular process (or function).

It is possible to place a defined Function Block in other ladder program and set the required input / output parameters to execute the function.

By defining a frequently used function as a Function Block, it is possible to reuse the function easily thus reducing the time required for programming and increasing the development efficiency.

In addition to the above, program diagnosis can be performed without displaying the detailed program in the function block, which is very efficient to decrease the amount time required to maintain the machine.

This function is a basic function in FANUC Series 0i-F and 0i-F Plus.

Benefits

- Reduction of the PMC program development time
- Reduction of the time required to maintain the machine
- Overall improvement of the efficiency and productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------|
| A02B-0323-R852 | 30i-B Extended PMC Ladder Instruction Function - PMC Function Blocks |
| A02B-0326-R852 | 31i-B5 Extended PMC Ladder Instruction Function - PMC Function Blocks |
| A02B-0327-R852 | 31i-B Extended PMC Ladder Instruction Function - PMC Function Blocks |
| A02B-0328-R852 | 32i-B Extended PMC Ladder Instruction Function - PMC Function Blocks |
| A02B-0333-R852 | 35i-B Extended PMC Ladder Instruction Function - PMC Function Blocks |
| A02B-0334-R852 | PM i-A Extended PMC Ladder Instruction Function - PMC Function Blocks |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

645

Functions

Machine Safety Functions

Machine Safety Functions are features that allow the machine tool builder to construct a machine that is inherently safe for the operator to run. Features such as Dual Check Safety allow the operator to safely setup for machining with the protection door open.

- Chuck and tail stock barrier prevents axis collisions with these machine parts.
- Stored stroke check acts like software over travel limit switches to insure that the machine is not run past the limits of travel.
- Interference check makes sure that multiple paths do not collide with each other.
- Key and Program Encryption prevent programs from being altered by unauthorized personnel.
- Protection of Data at Eight Levels allows different operators to have different authorizations for levels of operations that they are allowed to perform on the machine.

See the Description Manual for a complete list of functions relating to machine safety.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

646

Machine Safety Functions



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Dual Check Safety (DCS)

Features

The Dual Check Safety (DCS) function provides the necessary set of tools and function to design safe machine tools. A high level of safety to for the machine operator can be reached using this function, especially when the machine tool is open, power is still applied, and the physical security provided by the protective doors is no longer available.

Hardware redundancy and self tests allow the CNC to detect abnormal function and the Dual Check Safety function will quickly shut off power to protect the operator.

Dual Check Safety is certified by TÜV Süd Product Service GmbH in accordance to the following standards:

- 2006/42/EC Machinery Directive
- 2006/95/EC Low-Voltage Directive
- ISO 13849-1 Category 3, PL=d Machine Safety
- EN 60204-1:2006
- EN 61000-6-2:2005
- IEC 61508-1:1998 SIL 1-2
- IEC 61508-2:2000 SIL 1-2
- IEC 61508-3:1998 SIL 1-2
- IEC 61508-4:1998 SIL 1-2
- EN 501 78:1997

Following Dual Check Safety functions have been certified by TÜV SÜD Product Service GmbH:

- Safety Reduced Speed Check (Servo)
- Safety Reduced Speed Check (Spindle)
- Safe End Position Check
- Serial Data Transmission Check
- Emergency Stop
- Safe I/O Signal Check
- Safe Parameter Check
- Safe Servo Position Error Check
- Safe Position Switch Function
- Programmable Safe I/O Function
- Safe Brake Function
- Safe Servo Stop (STO) Function
- Safe Spindle Stop Function
- Safety Speed Zero Monitoring
- Safety Spindle Speed Limit Override (*)

The functions marked (*) are not available on the Series Oi-D CNC.

Special function are also available to simplify the creation of the machine documentation; refer to the "Test Mode Function for Dual Check Safety" in the catalogue for more information.

Benefits

- Provides a high level of safety for the operator during operations with protection opened while power is still applied
- Quick restart of the machine tool operation following operator intervention
- Fewer external safety circuits required
- Overall cost reduction of the safety solution
- Certified to comply to the actual safety standards

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------------------------|
| A02B-0323-S661 | 30i-B Dual Check Safety - ATTENTION: NOT Supporting Analog Spindle, Servos in I/O-Link |
| A02B-0326-S661 | 31i-B5 Dual Check Safety - ATTENTION: NOT Supporting Analog Spindle, Servos in I/O-Link |
| A02B-0327-S661 | 31i-B Dual Check Safety - ATTENTION: NOT Supporting Analog Spindle, Servos in I/O-Link |
| A02B-0328-S661 | 32i-B Dual Check Safety - ATTENTION: NOT Supporting Analog Spindle, Servos in I/O-Link |
| A02B-0333-S661 | 35i-B Dual Check Safety - ATTENTION: NOT Supporting Analog Spindle, Servos in I/O-Link |
| A02B-0334-S661 | PM i-A Dual Check Safety - ATTENTION: NOT Supporting Analog Spindle, Servos in I/O-Link |
| A02B-0339-S661 | 0i-TF Dual Check Safety |
| A02B-0340-S661 | 0i-MF Dual Check Safety |
| A02B-0349-S661 | 0i-TFP Dual Check Safety |
| A02B-0350-S661 | 0i-MFP Dual Check Safety |
| A02B-0353-S661 | 30i-BP Dual Check Safety |
| A02B-0356-S661 | 31i-B5P Dual Check Safety |
| A02B-0357-S661 | 31i-BP Dual Check Safety |
| A02B-0358-S661 | 32i-BP Dual Check Safety |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

648

Machine Safety Functions



Safety I/O Signal History Function

Features

This function records the state transitions of safety I/O signals. If an alarm related to Dual Check Safety occurs, the recording is stopped and the recorded signals are displayed. Thereby, the cause of the alarm can be identified easily.

This function is included in Dual Check Safety on FANUC Series 0i-F and 0i-F Plus.

Benefits

- Reduces downtime

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0333-R667 | 35i-B Safety I/O Signal History Function |
| A02B-0334-R667 | PM i-A Safety I/O Signal History Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

649

Machine Safety Functions



Safety Spindle Speed Limit Override

Features

In the safety speed monitoring function of Dual Check Safety Function, the safety speed for the spindle can be switched between 4 different values / steps by the Safety Speed Selection signal.

When several chucks are used or the safety speed is required to be selected corresponding to the diameter of work, a more detailed selection is required; in this case, the safety speed for the spindle can be overridden from 10% to 100% by the safety spindle speed limit override signal.

Benefits

- Flexible safe spindle speed management
- Support of complex machine configuration without requiring programming or additional external hardware

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0323-R626 | 30i-B Dual Check Safety - Safety Spindle Speed Limit Override Function |
| A02B-0326-R626 | 31i-B5 Dual Check Safety - Safety Spindle Speed Limit Override Function |
| A02B-0327-R626 | 31i-B Dual Check Safety - Safety Spindle Speed Limit Override Function |
| A02B-0328-R626 | 32i-B Dual Check Safety - Safety Spindle Speed Limit Override Function |
| A02B-0333-R626 | 35i-B Dual Check Safety - Safety Spindle Speed Limit Override Function |
| A02B-0339-R626 | 0i-TF Safe Spindle Speed Limit Override Function |
| A02B-0340-R626 | 0i-MF Safe Spindle Speed Limit Override Function |
| A02B-0349-R626 | 0i-TFP Safety Spindle Speed Limit Override Function |
| A02B-0350-R626 | 0i-MFP Safety Spindle Speed Limit Override Function |
| A02B-0353-R626 | 30i-BP Safety Spindle Speed Limit Override Function |
| A02B-0356-R626 | 31i-B5P Safety Spindle Speed Limit Override Function |
| A02B-0357-R626 | 31i-BP Safety Spindle Speed Limit Override Function |
| A02B-0358-R626 | 32i-BP Safety Spindle Speed Limit Override Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

650

Machine Safety Functions



Test Mode Function for Dual Check Safety Acceptance Test

Features

When designing a machine, a machine builder must document the safety system. A safety confirmation test called "Acceptance Test" must be performed to confirm whether the safety function of a machine works correctly.

During the Acceptance Test, it must be confirmed that an alarm is generated correctly and a machine stops safely, when the machine is placed in not safe condition intentionally.

When the Acceptance Test is performed in a conventional manner, the power of CNC must be turned off and on every time a safety related alarm of Dual Check Safety function is generated and the safety parameter is rewritten. This requires a significant amount of time, especially when the power is turned on and off.

With the Test Mode Function, it is not required to turn the power on and off at each safety alarm generated. In this case, the time required to perform the Acceptance Test is greatly reduced.

Following functions are allowed in an Acceptance Test mode:

- When the safety parameter is changed, the changed parameter is effective without turning the power-off.
- Even if the safety related alarm is generated, the alarm state can be released by the reset operation without turning off and on the power of the CNC

Benefits

- Faster process of Acceptance Test

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------|
| A02B-0323-R671 | 30i-B Dual Check Safety - Test Mode Function for Acceptance Test |
| A02B-0326-R671 | 31i-B5 Dual Check Safety - Test Mode Function for Acceptance Test |
| A02B-0327-R671 | 31i-B Dual Check Safety - Test Mode Function for Acceptance Test |
| A02B-0328-R671 | 32i-B Dual Check Safety - Test Mode Function for Acceptance Test |
| A02B-0333-R671 | 35i-B Dual Check Safety - Test Mode Function for Acceptance Test |
| A02B-0334-R671 | PM i-A Dual Check Safety - Test Mode Function for Acceptance Test |
| A02B-0339-R671 | 0i-TF Test Mode Function for Acceptance Test |
| A02B-0340-R671 | 0i-MF Test Mode Function for Acceptance Test |
| A02B-0349-R671 | 0i-TFP Test Mode Function for Acceptance Test |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

651

| Specification | Description |
|----------------|------------------------------------------------|
| A02B-0350-R671 | 0i-MFP Test Mode Function for Acceptance Test |
| A02B-0353-R671 | 30i-BP Test Mode Function for Acceptance Test |
| A02B-0356-R671 | 31i-B5P Test Mode Function for Acceptance Test |
| A02B-0357-R671 | 31i-BP Test Mode Function for Acceptance Test |
| A02B-0358-R671 | 32i-BP Test Mode Function for Acceptance Test |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

652

Functions

Option Packages and Kits

An option package thematically combines various functions in a meaningful way. This section of the catalogue contains information on available option packages.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

653

Option Packages and Kits

Basic Option

Features

The Basic Option packages combine functions which are suitable for transfer lines (35i-B) or motion control applications (Power Motion i-A). The following table gives an overview over the functions that are contained in the different Basic Option packages.

| Function | 35i-B | | PMi-A | |
|------------------------------------------------------|----------------|----------------|----------------|----------------|
| | Basic Option 1 | Basic Option 2 | Basic Option 1 | Basic Option 2 |
| Simultaneously Controlled Axes Expansion | - | - | • | • |
| Axis Control by PMC | • | • | • | • |
| Control Axis Detach | - | • | - | • |
| Increment System C | - | • | - | • |
| Inch/Metric Conversion | - | • | - | • |
| Stroke Limit External Setting | - | • | - | • |
| Position Switch | - | • | - | • |
| Reference Point Setting with Mechanical Stopper | - | • | - | • |
| Manual Handle Feed 1 Unit | • | • | • | • |
| Handle Interruption | - | • | - | • |
| Multi-Step Skip | - | • | - | • |
| 3rd/4th Reference Position Return | - | • | - | • |
| Bell-Shaped Acc/Dec After Cutting Feed Interpolation | - | • | - | • |
| Rate Feed | - | • | - | • |
| Feed Stop | - | • | - | • |
| Optional Block Skip | - | • | - | • |
| Custom Macro | • | • | • | • |
| Addition of Custom Macro Common Variables | • | • | • | • |
| Pattern Data Input | - | • | - | • |
| Tool Offset, 99 Pairs | - | • | - | • |
| Stored Pitch Error Compensation | - | • | - | • |
| Playback | - | • | - | • |
| Background Editing | - | • | - | • |
| Run Hour and Parts Count Display | - | • | - | • |
| Software Operator's Panel | - | • | - | • |
| Software Operator's Panel General Purpose Switch | - | • | - | • |
| Multi-Language Display, Japanese | • | • | • | • |
| RS232C Interface, 1 Channel | • | • | • | • |
| RS232C Interface, 2 Channels | - | • | - | • |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Function | 35i-B | | PMi-A | |
|-----------------------------|----------------|----------------|----------------|----------------|
| | Basic Option 1 | Basic Option 2 | Basic Option 1 | Basic Option 2 |
| External Data Input | - | • | - | • |
| External I/O Device Control | - | • | - | • |

Benefits

- Select the options for transfer lines or motion control applications easily

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0333-R702 | 35i-B Basic Option 1 - Incl. Axis Control by PMC, Manual Handle Feed 1 Unit, Custom Macro, Addition of Custom Macro Common Variables, RS232C Interface 1, Japanese Language Display |
| A02B-0333-R703 | 35i-B Basic Option 2 - Incl. Basic Option 1, Axes Detach, Incr. System C, Inch/Metric Conv., Stroke Limit Ext. Setting, Pos. Switch, Ref.-Point Setting w. Mech. Stopper, Handle Interruption, Synchr. Cutting, Multi-Step Skip, 3rd/4th Ref. Pos. Return, Bell-shaped Acc./Dec. after Cutting Feed Interp., Pitch Error Comp., Ext. Data Input, Tool Offset 99 Pairs, Run Hour / Parts Count Display, SW Operator's Panel / Gen. Purpose Switch, Playback, Multi-Part Progr. Edit, RS232C I/F 2, Ext. Contr. of I/O Device, Pattern Data Input, Rate Feed, Feed Stop |
| A02B-0334-R702 | PM i-A Basic Option 1 - Incl. 4 Simult. Controlled Axes, Axis Control by PMC, Manual Handle Feed 1 Unit, Custom Macro, Addition of Custom Macro Common Variables, RS232C Interface 1, Japanese Language Display |
| A02B-0334-R703 | PM i-A Basic Option 2 - Incl. Basic Option 1, Axes Detach, Incr. System C, Inch/Metric Conv., Stroke Limit Ext. Setting, Pos. Switch, Ref.-Point Setting w. Mech. Stopper, Handle Interruption, Synchr. Cutting, Multi-Step Skip, 3rd/4th Ref. Pos. R |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

655

Option Packages and Kits

Turning Package 1

Features

The Turning Package 1 combines functions that are frequently used in turning applications. These functions are combined in the Turning Package 1:

- Polar Coordinate Interpolation
- Cylindrical Interpolation
- Variable Lead Thread Cutting
- Constant Surface Speed Control
- Direct Drawing Dimension Programming
- Chamfering / Corner Rounding
- Multiple Repetitive Cycles
- Multiple Repetitive Cycles II
- Tool Offset Pairs 200
- Tool Geometry/Wear Compensation

Benefits

- Select the options for turning applications easily

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0353-R092 | 30i-BP Turning Package 1 |
| A02B-0356-R092 | 31i-B5P Turning Package 1 |
| A02B-0357-R092 | 31i-BP Turning Package 1 |
| A02B-0358-R092 | 32i-BP Turning Package 1 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

656

Option Packages and Kits

Turning Package 2

Features

The Turning Package 2 combines functions that are frequently used in advanced turning applications, e.g. with multiple spindles. These functions are combined in the Turning Package 2:

- Polygon Machining with Two Spindles
- Chuck and Tail Stock Barrier
- Polygon Turning
- Thread Cutting Retract
- Actual Spindle Speed Output
- Spindle Synchronous Control
- Multi-Spindle Control
- G-Code System B/C
- Mirror Image for Double Turret
- Direct Input of Offset Value Measured B
- Y-Axis Offset
- Spindle Control with Servo Motor
- Manual Handle Retrace for Multi-Path

Benefits

- Select the options for turning applications easily

Ordering Information

| Specification | Description |
|----------------|---------------------------|
| A02B-0353-R093 | 30i-BP Turning Package 2 |
| A02B-0356-R093 | 31i-B5P Turning Package 2 |
| A02B-0357-R093 | 31i-BP Turning Package 2 |
| A02B-0358-R093 | 32i-BP Turning Package 2 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

657

Option Packages and Kits

Milling Standard Package

Features

Milling Standard Package is a series of option packages for the FANUC Series 30i-B/31i-B5/31i-B that contains the relevant options suitable for high-speed and high-quality machining. The following table lists the options which are combined in the different packages.

| Function | | Milling Standard Package | | |
|----------|------------------------------------------------------|--------------------------|-----------------|------------------|
| | | I ⁺ | II ⁺ | III ⁺ |
| J802 | Controllable Axes Expansion | • | • | • |
| J803 | Simultaneously Controlled Axes Expansion | • | • | • |
| J805 | Increment System C | • | • | • |
| J971 | Run Hour and Parts Count Display | • | • | • |
| J829 | Bell-Shaped Acc/Dec After Cutting Feed Interpolation | • | • | • |
| J398 | HRV3 Control | • | • | • |
| J835 | Manual Handle Feed 1 Unit | • | • | • |
| J894 | Workpiece Coordinate System | • | • | • |
| J917 | Workpiece Coordinate System Preset | • | • | • |
| J930 | Tool Radius / Tool Nose Radius Compensation | • | • | • |
| J937 | Tool Offset Memory C | • | • | • |
| J876 | Inch/Metric Conversion | • | • | • |
| J873 | Custom Macro | • | • | • |
| J887 | Addition of Custom Macro Common Variables | • | • | • |
| J890 | Canned Cycles for Drilling | • | • | • |
| J828 | Rigid Tapping | • | • | • |
| J664 | Retraction for Rigid Tapping | • | • | • |
| S702 | Rigid Tapping with Bell-Shaped Acc/Dec | • | • | • |
| J956 | Background Editing | • | • | • |
| J850 | Spindle Serial Output | • | • | • |
| J853 | Spindle Orientation | • | • | • |
| J718 | Unexpected Disturbance Torque Detection Function | • | • | • |
| R630 | Quick Program Restart | • | • | • |
| J848 | High-Speed Skip | • | • | • |
| J841 | Stored Pitch Error Compensation | • | • | • |
| S644 | Interpolation Type Pitch Error Compensation | • | • | • |
| J747 | Straightness Compensation | • | • | • |
| S639 | Interpolation Type Straightness Compensation | • | • | • |
| S808 | AI Contour Control II ⁺ | • | • | • |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Function | | Milling Standard Package | | |
|----------|--------------------------------------------|--------------------------|-----------------|------------------|
| | | I ⁺ | II ⁺ | III ⁺ |
| R696 | Smooth Tolerance ⁺ Control | • | • | • |
| S809 | High-Speed Processing | • | • | • |
| S679 | 3-Dimensional Manual Feed | - | • | • |
| S676 | Tilted Working Plane Command | - | • | • |
| R575 | Retraction for 3-Dimensional Rigid Tapping | - | • | • |
| S993 | Workpiece Setting Error Compensation | - | • | • |
| R649 | 3-Dimensional Rotary Error Compensation | - | • | • |
| R677 | High-Speed Smooth TCP | - | - | • |
| S667 | 3-Dimensional Cutter Compensation | - | - | • |

Benefits

- Select the necessary options for high-speed and high-quality machining easily

Ordering Information

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0323-R370 | 30i-B Milling Standard Package I+ |
| A02B-0323-R371 | 30i-B Milling Standard Package II+ |
| A02B-0323-R372 | 30i-B Milling Standard Package III+ |
| A02B-0326-R370 | 31i-B5 Milling Standard Package I+ |
| A02B-0326-R371 | 31i-B5 Milling Standard Package II+ |
| A02B-0326-R372 | 31i-B5 Milling Standard Package III+ |
| A02B-0327-R370 | 31i-B Milling Standard Package I+ |
| A02B-0327-R371 | 31i-B Milling Standard Package II+ |
| A02B-0327-R372 | 31i-B Milling Standard Package III+ |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

659

Option Packages and Kits

Milling Package

Features

The Milling Package combines functions that are frequently used in milling applications. These functions are combined in the Milling Package:

- Inverse Time Feed
- Dynamic Graphic Display Function *
- Speed Control with Acceleration in Circular Interpolation
- Single Direction Positioning
- Normal Direction Control
- Polar Coordinate Command
- One-Digit F Code Feed
- Thread Cutting, Synchronous Cutting
- Program Restart
- Programmable Mirror Image
- Automatic Corner Override
- Scaling
- Coordinate System Rotation
- Addition of Workpiece Coordinate System 48 Pairs
- Small Hole Peck Drilling Cycle
- Tool Offset Pairs 400
- Tool Life Management
- Tool Offset Memory C
- Manual Handle Retrace
- Auxiliary Function Output in Program Restart
- Quick Program Restart *
- Addition of Custom Macro Common Variables 1000
- Optional Chamfering / Corner Rounding
- One Touch Macro Call
- Optimum Torque Acceleration/Deceleration
- Jerk Control *
- AI Contour Control I⁺
- AI Contour Control II⁺ *
- NURBS Interpolation
- Smooth Tolerance⁺ Control *
- High Speed Processing *
- Look-Ahead Blocks Expansion *
- Look-Ahead Blocks Expansion of AI Contour Control II *

* This function is not available in some system software series.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

660

Benefits

- Select the options for milling applications easily

Ordering Information

| Specification | Description |
|----------------|-------------------------|
| A02B-0353-R094 | 30i-BP Milling Package |
| A02B-0356-R094 | 31i-B5P Milling Package |
| A02B-0357-R094 | 31i-BP Milling Package |
| A02B-0358-R094 | 32i-BP Milling Package |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

661

Option Packages and Kits

Grinding Package

Features

The Grinding Package combines functions that are frequently used in grinding applications. These functions are combined in the Grinding Package:

- Continuous Dressing
- Infeed Control
- Chopping
- Multi-Step Skip
- Arbitrary Angular Axis Control
- Chopping Setting Screen
- High-Precision Oscillation Function
- Canned Cycle for Grinding

Benefits

- Select the options for grinding applications easily

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0353-R095 | 30i-BP Grinding Package |
| A02B-0356-R095 | 31i-B5P Grinding Package |
| A02B-0357-R095 | 31i-BP Grinding Package |
| A02B-0358-R095 | 32i-BP Grinding Package |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

662

Option Packages and Kits

Gear Cutting Package

Features

The Gear Cutting Package combines the Electronic Gear Box function and the Flexible Synchronous Control function as well as their associated optional functions. Electronic Gear Box and Flexible Synchronous Control are often used together in gear hobbing machines. With the Gear Cutting Package, it is also possible to switch between Electronic Gear Box and Flexible Synchronous Control easily.

These functions are combined in the Gear Cutting Package:

- Electronic Gear Box
- Skip Function for Electronic Gear Box
- Electronic Gear Box - 2 Pairs
- Electronic Gear Box - Automatic Phase Synchronization
- Spindle Electronic Gear Box
- U-Axis Control 2 Pairs (only 30i/31i/32i-B and 30i/31i/32i-B Plus)
- Cs Contour Control (only 30i/31i/32i-B and 30i/31i/32i-B Plus)
- Flexible Synchronous Control
- Inter-Path Flexible Synchronous Control
- Automatic Phase Synchronization for Flexible Synchronous Control
- Skip Function for Flexible Synchronous Control
- Hob Command by Flexible Synchronous Control

Benefits

- Switch Between Electronic Gear Box and Flexible Synchronous Control easily.

Ordering Information

| Specification | Description |
|----------------|------------------------------|
| A02B-0323-R024 | 30i-B Hob Machining Package |
| A02B-0326-R024 | 31i-B5 Hob Machining Package |
| A02B-0327-R024 | 31i-B Hob Machining Package |
| A02B-0328-R024 | 32i-B Hob Machining Package |
| A02B-0349-R024 | 0i-TFP Hob Machining Package |
| A02B-0350-R024 | 0i-MFP Hob Machining Package |
| A02B-0353-R024 | 30i-BP Gear Cutting Package |
| A02B-0356-R024 | 31i-B5P Gear Cutting Package |
| A02B-0357-R024 | 31i-BP Gear Cutting Package |
| A02B-0358-R024 | 32i-BP Gear Cutting Package |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

663

Option Packages and Kits

Multi-Path Kit

Features

The Multi-Path Kit combines functions that are frequently used in advanced multi-path applications. These functions are combined in the Multi-Path Kit:

- Synchronous and Composite Control
- Superimposed Control
- Synchronous, Composite and Superimposed Control by Program Command
- Flexible Path Axis Assignment

Benefits

- Select the options for advanced multi-path applications easily

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0353-R096 | 30i-BP Multi-Path Kit |
| A02B-0356-R096 | 31i-B5P Multi-Path Kit |
| A02B-0357-R096 | 31i-BP Multi-Path Kit |
| A02B-0358-R096 | 32i-BP Multi-Path Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

664

Option Packages and Kits

TWP Kit

Features

The TWP (Tilted Working Plane) Kit combines functions that are frequently used in 3+2 axis machining applications. These functions are combined in the TWP Kit:

- Tilted Working Plane Indexing Command
- 3-Dimensional Coordinate System Conversion
- 3-Dimensional Manual Feed
- Retraction for 3-Dimensional Rigid Tapping
- Manual Interruption of 3-D Coordinate System Conversion

Benefits

- Select the options for 3+2 axis machining applications easily

Ordering Information

| Specification | Description |
|----------------|-----------------|
| A02B-0353-R097 | 30i-BP TWP Kit |
| A02B-0356-R097 | 31i-B5P TWP Kit |
| A02B-0357-R097 | 31i-BP TWP Kit |
| A02B-0358-R097 | 32i-BP TWP Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

665

Option Packages and Kits

5-Axis Kit

Features

The 5-Axis Kit combines functions that are frequently used in simultaneous 5-axis machining applications. These functions are combined in the 5-Axis Kit:

- Tilted Working Plane Indexing Command
- 3-Dimensional Coordinate System Conversion
- 3-Dimensional Manual Feed
- Retraction for 3-Dimensional Rigid Tapping
- Manual Interruption of 3-D Coordinate System Conversion
- 3-Dimensional Rotary Error Compensation
- Tool Center Point Control
- Smooth Tool Center Point Control *
- High-Speed Smooth Tool Center Point Control *
- 3-Dimensional Cutter Compensation
- Workpiece Setting Error Compensation

* This function is not available in some system software series.

Benefits

- Select the options for simultaneous 5-axis machining applications easily

Ordering Information

| Specification | Description |
|----------------|--------------------|
| A02B-0353-R098 | 30i-BP 5-Axis Kit |
| A02B-0356-R098 | 31i-B5P 5-Axis Kit |
| A02B-0357-R098 | 31i-BP 5-Axis Kit |
| A02B-0358-R098 | 32i-BP 5-Axis Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

666

Option Packages and Kits

iHMI Kit

Features

The iHMI Kit combines iHMI with set-up and machining cycles. The kit contains these functions:

- iHMI Basic Function
- iHMI Set-Up Guidance *
- iHMI Machining Cycle *

* This function is not available in some system software series.

Benefits

- Select iHMI with cycles easily

Ordering Information

| Specification | Description |
|----------------|------------------|
| A02B-0353-R099 | 30i-BP iHMI Kit |
| A02B-0356-R099 | 31i-B5P iHMI Kit |
| A02B-0357-R099 | 31i-BP iHMI Kit |
| A02B-0358-R099 | 32i-BP iHMI Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

667

Option Packages and Kits

Full Closed Kit

Features

The Full Closed Kit combines functions that are frequently used in applications that have linear encoders for position feedback. These functions are combined in the Full Closed Kit:

- Dual Position Feedback
- Linear Scale Interface with Absolute Address Reference Mark
- Linear Scale I/F Expansion with Absolute Address Reference Mark
- Temporary Absolute Coordinate Setting

Benefits

- Select the options for applications with linear encoders easily

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A02B-0353-R101 | 30i-BP Full-Close Kit |
| A02B-0356-R101 | 31i-B5P Full-Close Kit |
| A02B-0357-R101 | 31i-BP Full-Closed Kit |
| A02B-0358-R101 | 32i-BP Full-Closed Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

668

Option Packages and Kits

Tandem Kit

Features

The Tandem Kit combines functions that are frequently used to perform synchronized motion, e.g. on gantry or spilt table axes. These functions are combined in the Tandem Kit:

- Axis Synchronous Control
- Tandem Disturbance Elimination

Benefits

- Select the options for applications with synchronized motion easily

Ordering Information

| Specification | Description |
|----------------|--------------------|
| A02B-0353-R102 | 30i-BP Tandem Kit |
| A02B-0356-R102 | 31i-B5P Tandem Kit |
| A02B-0357-R102 | 31i-BP Tandem Kit |
| A02B-0358-R102 | 32i-BP Tandem Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

669

Option Packages and Kits

Rotary Table Kit

Features

The Rotary Table Kit combines functions that are frequently used in machines with rotary tables, e.g. rotary transfer machines. These functions are combined in the Rotary Table Kit:

- Index Table Indexing
- Control Axis Detach
- 2nd Auxiliary Function
- Rotary Axis Control

Benefits

- Select the options for applications with rotary tables easily

Ordering Information

| Specification | Description |
|----------------|--------------------------|
| A02B-0353-R103 | 30i-BP Rotary Table Kit |
| A02B-0356-R103 | 31i-B5P Rotary Table Kit |
| A02B-0357-R103 | 31i-BP Rotary Table Kit |
| A02B-0358-R103 | 32i-BP Rotary Table Kit |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

670

Option Packages and Kits

Live Tool Kit

Features

The Live Tool Kits combine functions that are frequently used in lathes with live tools. Live Tool Kit 1 includes the following functions:

- Spindle Control with Servo Motor
- Dynamic Switching of Diameter/Radius Specification

Live Tool Kit 2 includes the following functions:

- Spindle Control with Servo Motor
- Dynamic Switching of Diameter/Radius Specification
- Tool Offset for Milling and Turning Function

Benefits

- Select the options for lathes with live tools easily

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0349-R047 | 0i-TFP Live Tool Kit 1 for Type 0-5 |
| A02B-0349-R048 | 0i-TFP Live Tool Kit 2 for Type 0-3 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

671

Functions

Interface Functions

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

672

Interface Functions

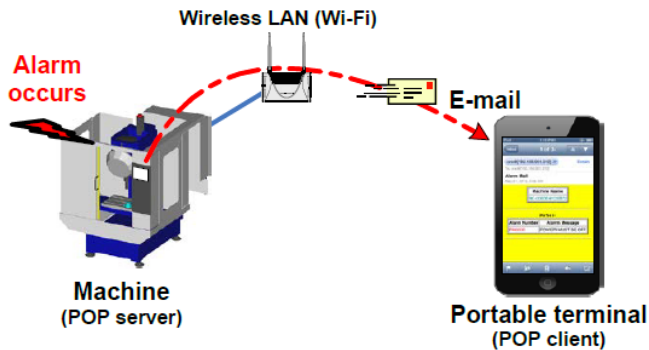

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

CNC Status Notification Function

Features

The CNC Status Notification function provides E-mails with information about the CNC status. The E-mails can be retrieved with a standard E-Mail client of any device that is connected to the same Intranet. This includes portable devices such as smartphones and tablets as well as personal computers. Devices can be connected by WLAN or by LAN. The function especially facilitates monitoring of multiple machines in a production environment.

The function creates 3 different kinds of E-mails. Alarm mails are created if an alarm occurs or is cancelled on the CNC. Status mails inform about the number of machined parts. The option "Run Hour and Parts Count Display" is necessary to utilize status mails. Message mails are created if an external operator message or macro message is generated on the CNC.

Benefits

- Simplify monitoring of multiple machines in a production environment

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------------------------------------|
| A02B-0319-R975 | 0i-TD CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0320-R975 | 0i-MD CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0323-R975 | 30i-B CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0326-R975 | 31i-B5 CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0327-R975 | 31i-B CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0328-R975 | 32i-B CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0333-R975 | 35i-B CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0334-R975 | PM i-A CNC Status Notification Function (Email to e.g. PC via Embedded Ethernet) |
| A02B-0339-R975 | 0i-TF CNC Status Notification Function |
| A02B-0340-R975 | 0i-MF CNC Status Notification Function |
| A02B-0349-R975 | 0i-TFP CNC Status Notification Function |
| A02B-0350-R975 | 0i-MFP CNC Status Notification Function |
| A02B-0353-R975 | 30i-BP CNC Status Notification Function |
| A02B-0356-R975 | 31i-B5P CNC Status Notification Function |
| A02B-0357-R975 | 31i-BP CNC Status Notification Function |
| A02B-0358-R975 | 32i-BP CNC Status Notification Function |

673 CNC

Communication

This section of the catalogue contains an overview of the most popular communication function available on the FANUC CNC.

The communication functions described include:

- FANUC Ethernet protocols
- EtherNet/IP
- PROFIBUS-DP
- PROFINET
- Etc.



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

674

Communication



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Embedded Ethernet

Features

The Series 30i CNC family as well as the Power Motion i CNC are equipped with an embedded Ethernet port (Ethernet connection on the mother board). This port can support several connection types and protocols to simplify the connection of the CNC to the outside world and greatly improve its efficiency.

The following functions and protocols are supported by the embedded Ethernet port:

- DHCP
- DNS
- DNC1 over Ethernet
- FTP client
- FOCAS / FOCAS 2
- Basic Operation Package 2
- FANUC Ladder
- Modbus/TCP Server*

Note: *Modbus/TCP function required. See further in the communication section of the catalogue for more information about the Modbus/TCP function.

In addition to the embedded Ethernet port, it is possible to increase the number of Ethernet ports of the CNC by adding separate Ethernet boards in the option slots of the CNC (Standalone or LCD-Mounted types) or using a Multi-Function Ethernet module (LCD-Mounted type CNC only). The additional Ethernet boards and modules have their own processors and provide more processing power for complex protocols or multiple and concurrent Ethernet connections.

Benefits

- Addition of Ethernet connectivity to the CNC
- Increase of the maintenance and remote access efficiency
- Provides data collection capabilities to the CNC
- Improvement of machine flexibility and increase of the system efficiency / productivity

675

Communication



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Fast Ethernet

Features

The Fast Ethernet board and functions bring the possibility to install additional Ethernet connections to the CNC. The Fast Ethernet board features its own processors so that more processing power is available to manage the communication and protocols.

Up to 3 Fast Ethernet boards can be installed in a Series 30i/31i/32i 4-slots standalone controllers. Up to 2 Fast Ethernet boards can be installed in a LCD-mounted CNC or in a Series 35i and Power Motion i-A standalone controllers.

Together with the embedded Ethernet port, the Fast Ethernet boards and/or the Multi-Function Ethernet Module, up to 4 separate Ethernet connections can be realized.

The Fast Ethernet board can run concurrent protocols and services such as:

- DHCP
- DNS
- DNC1 over Ethernet
- FTP client
- Screen Display Function
- Data Server and Fast Data Server
- FOCAS / FOCAS 2
- Basic Operation Package 2
- Remote Diagnostics
- FANUC Ladder
- FANUC SERVO GUIDE

It can support popular networking protocols such as:

- EtherNet/IP Scanner
- EtherNet/IP Scanner Adapter
- PROFINET I/O Device
- FL-net
- Modbus/TCP

Note:

- Refer to the connection manual for additional information on the protocols, settings and eventual limitations related to the concurrent use of different protocols in the Fast Ethernet board.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Addition of Ethernet connectivity to the CNC
- Improvement of the Ethernet connectivity of the CNC with many popular protocols
- Increase of the maintenance and remote access efficiency
- Provides data collection capabilities to the CNC
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-S707 | 30i-B Ethernet Function |
| A02B-0326-S707 | 31i-B5 Ethernet Function |
| A02B-0327-S707 | 31i-B Ethernet Function |
| A02B-0328-S707 | 32i-B Ethernet Function |
| A02B-0333-S707 | 35i-B Ethernet Function |
| A02B-0334-S707 | PM i-A Ethernet Function |
| A02B-0338-J147 | 0i-F Fast Ethernet Board (100BASE-TX) |
| A02B-0339-S707 | 0i-TF Ethernet Function |
| A02B-0340-S707 | 0i-MF Ethernet Function |
| A02B-0348-J147 | 0i-FP Fast Ethernet Board (100BASE-TX) |
| A02B-0349-S707 | 0i-TFP Ethernet Function |
| A02B-0350-S707 | 0i-MFP Ethernet Function |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-S707 | 30i-BP ETHERNET Function |
| A02B-0356-S707 | 31i-B5P ETHERNET Function |
| A02B-0357-S707 | 31i-BP ETHERNET Function |
| A02B-0358-S707 | 32i-BP ETHERNET Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

677

Communication

PROFINET IO

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

678

PROFINET IO



Controller and Device

PROFINET IO Controller

Features

PROFINET is an industrial network using Ethernet. It enables I/O communication between IO-Controller and IO-Devices. The communication standard is managed by PI (PROFIBUS and PROFINET International).

The PROFINET IO Controller function provides an easy way to setup the CNC system to connect to popular PLCs and IO-Devices equipment using PROFINET.

The PMC Allocation Expansion of PROFINET IO Controller function expands the maximum number of PMC allocations in the PMC multiple allocation mode from 48 to 256.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- I/O signals can be exchanged faster than PROFIBUS
- This function cannot be operated together with following functions on the same hardware.
 1. Ethernet function (S707)
 2. Modbus/TCP Server function (R968)
 3. Data Server function (S737)
 4. FL-Net function (J692)
 5. EtherNet/IP Scanner function (R966)
 6. EtherNet/IP Adapter function (R967)
 7. Profinet IO Device function (R972)
- It is possible to use this function at the same time by using other hardware (Fast Ethernet card).

Ordering Information

| Specification | Description |
|----------------|------------------------------------------------------------------------|
| A02B-0323-R971 | 30i-B PROFINET I/O Controller Function |
| A02B-0323-R979 | 30i-B PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0323-R984 | 30i-B PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0326-R971 | 31i-B5 PROFINET I/O Controller Function |
| A02B-0326-R979 | 31i-B5 PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0326-R984 | 31i-B5 PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0327-R971 | 31i-B PROFINET I/O Controller Function |
| A02B-0327-R979 | 31i-B PMC Allocation Expansion of PROFINET I/O Controller Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0327-R984 | 31i-B PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0328-R971 | 32i-B PROFINET I/O Controller Function |
| A02B-0328-R979 | 32i-B PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0328-R984 | 32i-B PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0333-R971 | 35i-B PROFINET I/O Controller Function |
| A02B-0333-R979 | 35i-B PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0333-R984 | 35i-B PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0334-R971 | PM i-A PROFINET I/O Controller Function |
| A02B-0334-R979 | PM i-A PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0334-R984 | PM i-A PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0339-R971 | 0i-TF Profinet I/O Controller Function |
| A02B-0339-R984 | 0i-TF PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0340-R971 | 0i-MF Profinet I/O Controller Function |
| A02B-0340-R984 | 0i-MF PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0349-R971 | 0i-TFP Profinet I/O Controller Function |
| A02B-0349-R979 | 0i-TFP PMC Allocation Expansion of Profinet I/O Controller Function |
| A02B-0349-R984 | 0i-TFP PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0350-R971 | 0i-MFP Profinet I/O Controller Function |
| A02B-0350-R979 | 0i-MFP PMC Allocation Expansion of Profinet I/O Controller Function |
| A02B-0350-R984 | 0i-MFP PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-R971 | 30i-BP PROFINET I/O Controller Function |
| A02B-0353-R979 | 30i-BP PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0353-R984 | 30i-BP PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0356-R971 | 31i-B5P PROFINET I/O Controller Function |
| A02B-0356-R979 | 31i-B5P PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0356-R984 | 31i-B5P PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0357-R971 | 31i-BP PROFINET I/O Controller Function |
| A02B-0357-R979 | 31i-BP PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0357-R984 | 31i-BP PROFINET I/O Controller Function (configuration data expansion) |
| A02B-0358-R971 | 32i-BP PROFINET I/O Controller Function |
| A02B-0358-R979 | 32i-BP PMC Allocation Expansion of PROFINET I/O Controller Function |
| A02B-0358-R984 | 32i-BP PROFINET I/O Controller Function (configuration data expansion) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

680

PROFINET IO



Controller and Device

PROFINET IO Controller 2

Features

PROFINET is an industrial network using Ethernet. It enables I/O communication between IO-Controller and IO-Devices. The communication standard is managed by PI (PROFIBUS and PROFINET International).

The PROFINET IO Controller 2 Function provides an easy way to setup the CNC system to connect to popular PLCs and IO Devices equipment using PROFINET. It also enables Acyclic Communication between CNC and IO Devices, Safety IO Devices or IO-Link Sensors / Actuators.

The PROFINET Safety Board is the dedicated Board for the PROFINET IO Controller 2 Function and for the PROFINET IO Controller Safety Function.

Benefits

- Acyclic communication for PROFINET available

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-J149 | 30i/31i/32i-B, PM i-A PROFINET I/O Safety Board |
| A02B-0323-R980 | 30i-B PROFINET I/O Controller 2 Function |
| A02B-0326-R980 | 31i-B5 PROFINET I/O Controller 2 Function |
| A02B-0327-R980 | 31i-B PROFINET I/O Controller 2 Function |
| A02B-0328-R980 | 32i-B PROFINET I/O Controller 2 Function |
| A02B-0333-R980 | 35i-B PROFINET I/O Controller 2 Function |
| A02B-0334-R980 | PM i-A PROFINET I/O Controller 2 Function |
| A02B-0338-J149 | 0i-F PROFINET I/O Safety Board |
| A02B-0338-R980 | 0i-PF PROFINET I/O Controller 2 Function |
| A02B-0339-R980 | 0i-TF PROFINET I/O Controller 2 Function |
| A02B-0340-R980 | 0i-MF PROFINET I/O Controller 2 Function |
| A02B-0348-J149 | 0i-FP PROFINET I/O Safety Board |
| A02B-0349-R980 | 0i-TFP PROFINET I/O Controller 2 Function |
| A02B-0350-R980 | 0i-MFP PROFINET I/O Controller 2 Function |
| A02B-0351-R980 | 0i-LFP PROFINET I/O Controller 2 Function |
| A02B-0353-J149 | 30i/31i/32i-BP PROFINET I/O Safety Board |
| A02B-0353-R980 | 30i-BP PROFINET I/O Controller 2 Function |
| A02B-0356-R980 | 31i-B5P PROFINET I/O Controller 2 Function |
| A02B-0357-R980 | 31i-LB Plus PROFINET I/O Controller 2 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

681

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0358-R980 | 32i-BP PROFINET I/O Controller 2 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

682

PROFINET I/O



Controller and Device

PROFINET I/O Controller Safety Function

Features

The PROFINET I/O Controller Safety function is an additional Function of the Dual Check Safety (DCS) Function. It makes it possible for the PROFINET I/O Controller 2 Function to handle safety signals. The communication standard is based on the Safety standard PROFIsafe managed by PI (PROFIBUS and PROFINET International). This function enables the CNC to exchange safety signals with PROFINET I/O Devices that support PROFIsafe.

Benefits

- Connect the CNC to Safety Devices via PROFINET
- Improvement of machine flexibility

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------------|
| A02B-0323-R981 | 30i-B PROFINET I/O Controller Safety Function |
| A02B-0326-R981 | 31i-B5 PROFINET I/O Controller Safety Function |
| A02B-0327-R981 | 31i-B PROFINET I/O Controller Safety Function |
| A02B-0328-R981 | 32i-B PROFINET I/O Controller Safety Function |
| A02B-0333-R981 | 35i-B PROFINET I/O Controller Safety Function |
| A02B-0334-R981 | PM i-A PROFINET I/O Controller Safety Function |
| A02B-0338-R981 | 0i-PF PROFINET I/O Controller Safety Function |
| A02B-0339-R981 | 0i-TF PROFINET I/O Controller Safety Function |
| A02B-0340-R981 | 0i-MF PROFINET I/O Controller Safety Function |
| A02B-0349-R981 | 0i-TFP PROFINET I/O Controller Safety Function |
| A02B-0350-R981 | 0i-MFP PROFINET I/O Controller Safety Function |
| A02B-0351-R981 | 0i-LFP PROFINET I/O Controller Safety Function |
| A02B-0353-R981 | 30i-BP PROFINET I/O Controller Safety Function |
| A02B-0356-R981 | 31i-B5P PROFINET I/O Controller Safety Function |
| A02B-0357-R981 | 31i-LB Plus PROFINET I/O Controller Safety Function |
| A02B-0358-R981 | 32i-BP PROFINET I/O Controller Safety Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

683

PROFINET IO



Controller and Device

PROFINET IO Device

Features

PROFINET is an industrial network using Ethernet. It enables I/O communication between IO-Controller and IO-Devices. The communication standard is managed by PI (PROFIBUS and PROFINET International).

The PROFINET IO Device (Slave) function for the Fast Ethernet board or the Multi-Function Ethernet module provides an easy way to setup the system installation and the connection of the CNC system to popular PLCs and equipment using PROFINET IO.

It provides up to 256 bytes of input and 256 bytes of output data to a PROFINET IO Controller.

PROFINET is available for the Series 30i/31i/32i/35i-B CNC and the Power Motion i-A.

Notes:

- Refer to the connection manual for additional information on the PROFINET IO Device data type supported, the size of the data, settings and GSDML files.
- The Ethernet hardware of the CNC supports several concurrent protocols and connections. Refer to the connection manuals for details and limitations that may exist.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Connection to PLCs and equipment by PROFINET IO network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-R972 | 30i-B PROFINET I/O Device Function |
| A02B-0326-R972 | 31i-B5 PROFINET I/O Device Function |
| A02B-0327-R972 | 31i-B PROFINET I/O Device Function |
| A02B-0328-R972 | 32i-B PROFINET I/O Device Function |
| A02B-0333-R972 | 35i-B PROFINET I/O Device Function |
| A02B-0334-R972 | PM i-A PROFINET I/O Device Function |
| A02B-0339-R972 | 0i-TF Profinet I/O Device Function |
| A02B-0340-R972 | 0i-MF Profinet I/O Device Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

684

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0349-R972 | 0i-TFP Profinet I/O Device Function |
| A02B-0350-R972 | 0i-MFP Profinet I/O Device Function |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-R972 | 30i-BP PROFINET I/O Device Function |
| A02B-0356-R972 | 31i-B5P PROFINET I/O Device Function |
| A02B-0357-R972 | 31i-BP PROFINET I/O Device Function |
| A02B-0358-R972 | 32i-BP PROFINET I/O Device Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

685

PROFINET IO



Controller and Device

PROFINET IO Device Safety Function

Features

The PROFINET IO Device Safety function makes it possible for the PROFINET IO Device function to handle safety signals. The communication standard is based on the Safety standard PROFIsafe managed by PI (PROFIBUS and PROFINET International). This function enables the CNC to exchange safety signals with a PROFINET IO Controller that supports PROFIsafe.

Benefits

- Connect the CNC to a Safety PLC via PROFINET
- Improvement of machine flexibility

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------|
| A02B-0323-R977 | 30i-B PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0326-R977 | 31i-B5 PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0327-R977 | 31i-B PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0328-R977 | 32i-B PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0333-R977 | 35i-B PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0334-R977 | PM i-A PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0339-R977 | 0i-TF PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0340-R977 | 0i-MF PROFINET I/O Device Safety Function (Slave I/O Device) |
| A02B-0349-R977 | 0i-TFP Profinet I/O Device Safety Function |
| A02B-0350-R977 | 0i-MFP Profinet I/O Device Safety Function |
| A02B-0353-R977 | 30i-BP PROFINET I/O Device Safety Function |
| A02B-0356-R977 | 31i-B5P PROFINET I/O Device Safety Function |
| A02B-0357-R977 | 31i-BP PROFINET I/O Device Safety Function |
| A02B-0358-R977 | 32i-BP PROFINET I/O Device Safety Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

686

Communication

PROFIBUS-DP

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

687

PROFIBUS-DP



PROFIBUS-DP Slave

Features

The PROFIBUS-DP Slave function and the PROFIBUS-DP Slave board for the CNC provide an easy way to setup the CNC system to connect to popular PLCs and I/O devices equipment using PROFIBUS-DP.

The PROFIBUS-DP Slave function provides up to 244 bytes of data to the PROFIBUS-DP Master device.

PROFIBUS-DP is available for the Series 30i/31i/32i-A CNC, the Series 30i/31i/32i/35i-B CNC, the Power Motion i-A and the Series 0i-D CNC. It is also available on numerous FANUC legacy CNC systems.

Notes:

- The PROFIBUS-DP functions cannot be used simultaneously with the DeviceNet functions or CC-Link functions
- Refer to the connection manual for additional information on the PROFIBUS-DP functions supported, the size of the data tables, settings, diagnostics and GSD files

Benefits

- Connection to PLCs and equipment by PROFIBUS-DP network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------|
| A02B-0323-J313 | 30i/31i/32i/35i-B, PM i-A Profibus DP Slave Board |
| A02B-0323-S732 | 30i-B Profibus DP Slave Function |
| A02B-0326-S732 | 31i-B5 Profibus DP Slave Function |
| A02B-0327-S732 | 31i-B Profibus DP Slave Function |
| A02B-0328-S732 | 32i-B Profibus DP Slave Function |
| A02B-0333-S732 | 35i-B Profibus DP Slave Function |
| A02B-0334-S732 | PM i-A Profibus DP Slave Function |
| A02B-0338-J313 | 0i-F Profibus DP Slave Board |
| A02B-0339-S732 | 0i-TF Profibus Slave Function |
| A02B-0340-S732 | 0i-MF Profibus Slave Function |
| A02B-0348-J313 | 0i-FP Profibus DP Slave Board |
| A02B-0349-S732 | 0i-TFP Profibus DP Slave Function |
| A02B-0350-S732 | 0i-MFP Profibus DP Slave Function |
| A02B-0353-J313 | 30i/31i/32i-BP PROFIBUS Slave Board |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

688

| Specification | Description |
|----------------|---------------------------------|
| A02B-0353-S732 | 30i-BP PROFIBUS Slave Function |
| A02B-0356-S732 | 31i-B5P PROFIBUS Slave Function |
| A02B-0357-S732 | 31i-BP PROFIBUS Slave Function |
| A02B-0358-S732 | 32i-BP PROFIBUS Slave Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

689

PROFIBUS-DP



Master

PROFIBUS-DP Master

Features

The PROFIBUS-DP Master function and the PROFIBUS-DP Master board for the CNC provide an easy way to setup the CNC system to connect to popular PLCs and I/O devices equipment using PROFIBUS-DP.

Up to 48 PROFIBUS-DP Slave stations can be connected to the Master with a total of 244 bytes per Slave station.

PROFIBUS-DP is available for the Series 30i/31i/32i-A CNC, the Series 30i/31i/32i/35i-B CNC, the Power Motion i-A and the Series 0i-D CNC. It is also available on numerous FANUC legacy CNC systems.

Notes:

- The PROFIBUS-DP functions cannot be used simultaneously with the DeviceNet functions or CC-Link functions
- Refer to the connection manual for additional information on the PROFIBUS-DP functions supported, the size of the data tables, settings, diagnostics and GSD files

Benefits

- Connection to PLCs and equipment by PROFIBUS-DP network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0323-J311 | 30i/31i/32i/35i-B, PM i-A Profibus DP Master Board |
| A02B-0323-S731 | 30i-B Profibus DP Master Function |
| A02B-0326-S731 | 31i-B5 Profibus DP Master Function |
| A02B-0327-S731 | 31i-B Profibus DP Master Function |
| A02B-0328-S731 | 32i-B Profibus DP Master Function |
| A02B-0333-S731 | 35i-B Profibus DP Master Function |
| A02B-0334-S731 | PM i-A Profibus DP Master Function |
| A02B-0338-J311 | 0i-F Profibus DP Master Board |
| A02B-0339-S731 | 0i-TF Profibus Master Function |
| A02B-0340-S731 | 0i-MF Profibus Master Function |
| A02B-0348-J311 | 0i-FP Profibus DP Master Board |
| A02B-0349-S731 | 0i-TFP Profibus DP Master Function |
| A02B-0350-S731 | 0i-MFP Profibus DP Master Function |
| A02B-0353-J311 | 30i/31i/32i-BP PROFIBUS Master Board |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

690

| Specification | Description |
|----------------|----------------------------------|
| A02B-0353-S731 | 30i-BP PROFIBUS Master Function |
| A02B-0356-S731 | 31i-B5P PROFIBUS Master Function |
| A02B-0357-S731 | 31i-BP PROFIBUS Master Function |
| A02B-0358-S731 | 32i-BP PROFIBUS Master Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

691

Communication

EtherNet/IP

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

692

EtherNet/IP



EtherNet/IP Adapter

Features

EtherNet/IP is an industrial network based on Ethernet. The specification of EtherNet/IP is managed by ODVA (Open DeviceNet Vendor Association) and its globalization and standardization are promoted. Therefore, EtherNet/IP has been adopted by many vendors, and it is possible to connect to various types of industrial devices. Moreover, EtherNet/IP devices can be used together with general-purpose Ethernet devices because a standard Ethernet technology is used.

The EtherNet/IP Adapter function provides the CNC with the capability to act as an EtherNet/IP Adapter (Slave) to connect the CNC to an EtherNet/IP environment. This function provides an easy way to setup the system installation and the connection to popular PLCs and equipment using EtherNet/IP.

When using multicast between up to 32 CNC, it is possible to realize simple shared memory, which greatly simplifies network management and allows, for instance, an overview of the status of each machine of a line on each CNC.

The EtherNet/IP Adapter function can be used with the following Ethernet hardware:

- The "Fast Ethernet board" of the Series 30i/31i/32i/35i-B CNC and the Power Motion i-A
- The "Multi-Function Ethernet module" of the Series 30i/31i/32i/35i-B and Power Motion i-A LCD-Mounted type

Notes:

- Refer to the connection manual for additional information on the EtherNet/IP data type supported, the size of the data tables, settings, EDS files as well as the function specifications.
- The Ethernet hardware of the CNC supports several concurrent protocols and connections. Refer to the connection manuals for details and limitations that may exist.
- It is possible to run the EtherNet/IP Scanner and Adapter function on the same Ethernet hardware module or on different modules. Refer to the connection manuals for details and limitations that may exist.
- If the EtherNet/IP Adapter function and the EtherNet/IP PORT2 function are specified, the EtherNet/IP Adpater function can be operated on different hardware boards at the same time.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Connection to PLCs and machines by EtherNet/IP network
- Acceleration of the system installation and commissioning
- Improvement of the system uptime and efficiency

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-R967 | 30i-B Ethernet/IP Adapter Function |
| A02B-0323-R974 | 30i-B Ethernet/IP Adapter Port 2 Function |
| A02B-0326-R967 | 31i-B5 Ethernet/IP Adapter Function |
| A02B-0326-R974 | 31i-B5 Ethernet/IP Adapter Port 2 Function |
| A02B-0327-R967 | 31i-B Ethernet/IP Adapter Function |
| A02B-0327-R974 | 31i-B Ethernet/IP Adapter Port 2 Function |
| A02B-0328-R967 | 32i-B Ethernet/IP Adapter Function |
| A02B-0328-R974 | 32i-B Ethernet/IP Adapter Port 2 Function |
| A02B-0333-R967 | 35i-B Ethernet/IP Adapter Function |
| A02B-0333-R974 | 35i-B Ethernet/IP Adapter Port 2 Function |
| A02B-0334-R967 | PM i-A Ethernet/IP Adapter Function |
| A02B-0334-R974 | PM i-A Ethernet/IP Adapter Port 2 Function |
| A02B-0339-R967 | 0i-TF Ethernet/IP Adapter Function |
| A02B-0340-R967 | 0i-MF Ethernet/IP Adapter Function |
| A02B-0349-R967 | 0i-TFP Ethernet/IP Adapter Function |
| A02B-0350-R967 | 0i-MFP Ethernet/IP Adapter Function |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-R967 | 30i-BP ETHERNET / IP Adapter Function |
| A02B-0353-R974 | 30i-BP ETHERNET / IP Adapter Port-2 Function |
| A02B-0356-R967 | 31i-B5P ETHERNET / IP Adapter Function |
| A02B-0356-R974 | 31i-B5P ETHERNET / IP Adapter Port-2 Function |
| A02B-0357-R967 | 31i-BP ETHERNET / IP Adapter Function |
| A02B-0357-R974 | 31i-BP ETHERNET / IP Adapter Port-2 Function |
| A02B-0358-R967 | 32i-BP ETHERNET / IP Adapter Function |
| A02B-0358-R974 | 32i-BP ETHERNET / IP Adapter Port-2 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

694

EtherNet/IP



EtherNet/IP Adapter Safety Function

Features

The EtherNet/IP Adapter Safety function makes it possible for the EtherNet/IP Adapter function to handle safety signals. The communication standard is based on CIP-Safety managed by the ODVA (Open DeviceNet Vendor Association). This function enables the CNC to exchange safety signals with an EtherNet/IP Scanner device that supports CIP-Safety.

Benefits

- Connect the CNC to a Safety PLC via EtherNet/IP
- Improvement of machine flexibility

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-R976 | 30i-B Ethernet/IP Adapter Safety Function |
| A02B-0326-R976 | 31i-B5 Ethernet/IP Adapter Safety Function |
| A02B-0327-R976 | 31i-B Ethernet/IP Adapter Safety Function |
| A02B-0328-R976 | 32i-B Ethernet/IP Adapter Safety Function |
| A02B-0333-R976 | 35i-B ETHERNET/IP Adapter Safety Function |
| A02B-0334-R976 | PM i-A ETHERNET/IP Adapter Safety Function |
| A02B-0339-R976 | 0i-TF Ethernet/IP Adapter Safety Function |
| A02B-0340-R976 | 0i-MF Ethernet/IP Adapter Safety Function |
| A02B-0349-R976 | 0i-TFP Ethernet/IP Adapter Safety Function |
| A02B-0350-R976 | 0i-MFP Ethernet/IP Adapter Safety Function |
| A02B-0353-R976 | 30i-BP ETHERNET / IP Adapter Safety Function |
| A02B-0356-R976 | 31i-B5P ETHERNET / IP Adapter Safety Function |
| A02B-0357-R976 | 31i-BP ETHERNET / IP Adapter Safety Function |
| A02B-0358-R976 | 32i-BP ETHERNET / IP Adapter Safety Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

695

EtherNet/IP



Scanner

EtherNet/IP Scanner

Features

EtherNet/IP is an industrial network based on Ethernet. The specification of EtherNet/IP is managed by ODVA (Open DeviceNet Vendor Association) and its globalization and standardization are promoted. Therefore, EtherNet/IP has been adopted by many vendors, and it is possible to connect to various types of industrial devices. Moreover, EtherNet/IP devices can be used together with general-purpose Ethernet devices because a standard Ethernet technology is used.

The EtherNet/IP Scanner function provides the CNC with the capability to act as an EtherNet/IP Scanner (Master) to connect the CNC to an EtherNet/IP device environment. This function provides an easy way to setup the system installation and the connection to popular PLCs and I/O devices using EtherNet/IP.

When using multicast between up to 32 CNC, it is possible to realize simple shared memory, which greatly simplifies network management and allows, for instance, an overview of the status of each machine of a line on each CNC.

The EtherNet/IP Scanner function can be used with the following Ethernet hardware:

- The "Fast Ethernet board" of the Series 30i/31i/32i/35i-B CNC and the Power Motion i-A
- The "Multi-Function Ethernet module" of the Series 30i/31i/32i/35i-B and Power Motion i-A LCD-Mounted type

Notes:

- Refer to the connection manual for additional information about the EtherNet/IP data type supported, the size of the data tables, programming, EDS file as well as the function specifications.
- The Ethernet hardware of the CNC supports several concurrent protocols and connections. Refer to the connection manuals for details and limitations that may exist.
- It is possible to run the EtherNet/IP Scanner and Adapter function on the same Ethernet hardware module or on different modules. Refer to the connection manuals for details and limitations that may exist.
- If the EtherNet/IP Scanner function and the EtherNet/IP PORT2 function are specified, the EtherNet/IP Scanner function can be operated on different hardware boards at the same time.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Connection to PLCs and equipment by EtherNet/IP network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-R966 | 30i-B Ethernet/IP Scanner Function |
| A02B-0323-R973 | 30i-B Ethernet/IP Scanner Port 2 Function |
| A02B-0326-R966 | 31i-B5 Ethernet/IP Scanner Function |
| A02B-0326-R973 | 31i-B5 Ethernet /IP Scanner Port 2 Function |
| A02B-0327-R966 | 31i-B Ethernet/IP Scanner Function |
| A02B-0327-R973 | 31i-B Ethernet/IP Scanner Port 2 Function |
| A02B-0328-R966 | 32i-B Ethernet/IP Scanner Function |
| A02B-0328-R973 | 32i-B Ethernet/IP Scanner Port 2 Function |
| A02B-0333-R966 | 35i-B Ethernet/IP Scanner Function |
| A02B-0333-R973 | 35i-B Ethernet/IP Scanner Port 2 Function |
| A02B-0334-R966 | PM i-A Ethernet/IP Scanner Function |
| A02B-0334-R973 | PM i-A Ethernet/IP Scanner Port 2 Function |
| A02B-0339-R966 | 0i-TF Ethernet/IP Scanner Function |
| A02B-0340-R966 | 0i-MF Ethernet/IP Scanner Function |
| A02B-0349-R966 | 0i-TFP Ethernet/IP Scanner Function |
| A02B-0350-R966 | 0i-MFP Ethernet/IP Scanner Function |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-R966 | 30i-BP ETHERNET / IP Scanner Function |
| A02B-0353-R973 | 30i-BP ETHERNET / IP Scanner Port-2 Function |
| A02B-0356-R966 | 31i-B5P ETHERNET / IP Scanner Function |
| A02B-0356-R973 | 31i-B5P ETHERNET / IP Scanner Port-2 Function |
| A02B-0357-R966 | 31i-BP ETHERNET / IP Scanner Function |
| A02B-0357-R973 | 31i-BP ETHERNET / IP Scanner Port-2 Function |
| A02B-0358-R966 | 32i-BP ETHERNET / IP Scanner Function |
| A02B-0358-R973 | 32i-BP ETHERNET / IP Scanner Port-2 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

697

Communication

DeviceNet

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

698

DeviceNet



DeviceNet Scanner (Master)

Features

DeviceNet is one of the world's leading device-level networks for industrial automation. DeviceNet offers robust, efficient data handling because it is based on Producer/Consumer technology. This modern communications model offers key capabilities that allow the user to determine effectively what information is needed and when.

The specification of DeviceNet is managed by ODVA (Open DeviceNet Vendor Association).

The DeviceNet Scanner (Master) function and the DeviceNet Scanner board provide an easy way to setup the installation and the connection of the CNC to popular PLCs and I/O devices using DeviceNet.

Specifications:

- Up to 63 slaves can be addressed
- Up to 128 byte of digital inputs and 128 bytes of digital output per slave (maximum 320 bytes of digital inputs and 320 bytes of digital outputs for the whole network)
- Supports poll I/O connection and bit strobe I/O connection
- MAC ID can be selected between 0 to 63

Benefits

- Connect to PLCs and machines by DeviceNet network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0323-J301 | 30i/31i/32i/35i-B, PM i-A DeviceNet Master Board |
| A02B-0323-J303 | 30i/31i/32i-B DeviceNet Master Board (Card Slot on Main Board A2 or A5) |
| A02B-0323-S723 | 30i-B DeviceNet Master Function |
| A02B-0326-S723 | 31i-B5 DeviceNet Master Function |
| A02B-0327-S723 | 31i-B DeviceNet Master Function |
| A02B-0328-S723 | 32i-B DeviceNet Master Function |
| A02B-0333-S723 | 35i-B DeviceNet Master Function |
| A02B-0334-S723 | PM i-A DeviceNet Master Function |
| A02B-0338-J301 | 0i-F DeviceNet Master Board |
| A02B-0339-S723 | 0i-TF DeviceNet Master Function |
| A02B-0340-S723 | 0i-MF DeviceNet Master Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

699

| Specification | Description |
|----------------|---------------------------------------|
| A02B-0348-J301 | 0i-FP Device-Net Master Board |
| A02B-0349-S723 | 0i-TFP Device-Net Master Function |
| A02B-0350-S723 | 0i-MFP Device-Net Master Function |
| A02B-0353-J301 | 30i/31i/32i-BP DEVICENET Master Board |
| A02B-0353-S723 | 30i-BP DEVICENET Master Function |
| A02B-0356-S723 | 31i-B5P DEVICENET Master Function |
| A02B-0357-S723 | 31i-BP DEVICENET Master Function |
| A02B-0358-S723 | 32i-BP DEVICENET Master Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

700

DeviceNet



DeviceNet Adapter (Slave)

Features

DeviceNet is one of the world's leading device-level networks for industrial automation. DeviceNet offers robust, efficient data handling because it is based on Producer/Consumer technology. This modern communications model offers key capabilities that allow the user to determine effectively what information is needed and when.

The specification of DeviceNet is managed by ODVA (Open DeviceNet Vendor Association).

The DeviceNet Adapter (Slave) function and the DeviceNet Adapter board provide an easy way to setup the installation and the connection of the CNC to popular PLCs and I/O devices using DeviceNet.

Specifications:

- Up to 128 byte of digital inputs and 128 bytes of digital output per slave
- Supports poll I/O connection and bit strobe I/O connection
- MAC ID can be selected between 0 to 63

Benefits

- Connect to PLCs and machines by DeviceNet network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-J302 | 30i/31i/32i/35i-B, PM i-A DeviceNet Slave Board |
| A02B-0323-S724 | 30i-B DeviceNet Slave Function |
| A02B-0326-S724 | 31i-B5 DeviceNet Slave Function |
| A02B-0327-S724 | 31i-B DeviceNet Slave Function |
| A02B-0328-S724 | 32i-B DeviceNet Slave Function |
| A02B-0333-S724 | 35i-B DeviceNet Slave Function |
| A02B-0334-S724 | PM i-A DeviceNet Slave Function |
| A02B-0338-J302 | 0i-F DeviceNet Slave Board |
| A02B-0339-S724 | 0i-TF DeviceNet Slave Function |
| A02B-0340-S724 | 0i-MF DeviceNet Slave Function |
| A02B-0348-J302 | 0i-FP Device-Net Slave Board |
| A02B-0349-S724 | 0i-TFP Device-Net Slave Function |
| A02B-0350-S724 | 0i-MFP Device-Net Slave Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

701

| Specification | Description |
|----------------|--------------------------------------|
| A02B-0353-J302 | 30i/31i/32i-BP DEVICENET Slave Board |
| A02B-0353-S724 | 30i-BP DEVICENET Slave Function |
| A02B-0356-S724 | 31i-B5P DEVICENET Slave Function |
| A02B-0357-S724 | 31i-BP DEVICENET Slave Function |
| A02B-0358-S724 | 32i-BP DEVICENET Slave Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

702

Communication



FL-net

Features

The FL-net network on Ethernet is also known as JEMA Open PLC network - 2 (OPCN-2). The FL-net interface board and function provide an easy way to setup the system installation and the connection to popular PLCs and equipment using FL-net.

FL-net can interconnect various types of controllers such as programmable controllers (PLC), robots, CNC and personal computers of many different manufacturers to control and monitor them.

Function highlights:

- Multi-vendor environment using an open network: FL-net conforms to open standards so that communication devices manufactured by different vendors /manufacturers can communicate with each other.
- Large-scale network: up to 249 communication devices (nodes) can be connected to share data.
- Two communication functions are available: FL-net supports both the common memory and message communication. The common memory communication uses cyclic data transmission to allow the nodes to always share the same data. The message communication allows the nodes to exchange only required information on demand.
- Large-capacity common memory: 8K bits + 8K words (a total of 17K bytes) of large-capacity common memory can be shared among all nodes.
- Fast response: FL-net provides a fast response of 50 ms/32 nodes (at 2K bits + 2K words/32 nodes).
- High reliability: each node can participate in or be disconnected from the FL-net at any time. In this case, the power to each node can be turned on or off without problem and can provide high maintainability. The masterless token method allows communication to be continued without stopping the network by the token management, if a failure occurs in a communication device.
- Low cost: the use of cables for Ethernet can reduce the cost of communication devices such as transceivers and hubs as well as on cabling.
- High maintainability: various types of management tables are available. The management tables can be referenced to identify a faulty node quickly.
- Additional FANUC enhancements to FL-net: increase of the transmission speed from 10Mbps to 100Mbps, simultaneous FL-net and Ethernet communication on the same network (CNC Screen Display, File Transfer, FANUC LADDER-III, etc.)

Notes:

- The Ethernet hardware of the CNC supports several concurrent protocols and connections. Refer to the connection manuals for details and limitations that may exist.
- The PORT 2 function provides the capability to operate the same function on different hardware boards at the same time. Example: if the FL-net function and the FL-net PORT 2 functions are specified, the FL-net function can be operated on different hardware boards at the same time.
- FL-net supports safety functions. Refer to the "FL-net safety" section further in this catalogue for more information.

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

703

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Easy connection to Robots, PLCs and equipment using FL-net network
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information


| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-J692 | 30i-B FL-Net Function |
| A02B-0323-R964 | 30i-B FL-Net Port 2 Function |
| A02B-0326-J692 | 31i-B5 FL-Net Function |
| A02B-0326-R964 | 31i-B5 FL-Net Port 2 Function |
| A02B-0327-J692 | 31i-B FL-Net Function |
| A02B-0327-R964 | 31i-B FL-Net Port 2 Function |
| A02B-0328-J692 | 32i-B FL-Net Function |
| A02B-0328-R964 | 32i-B FL-Net Port 2 Function |
| A02B-0333-J692 | 35i-B FL-Net Function |
| A02B-0333-R964 | 35i-B FL-Net Port 2 Function |
| A02B-0334-J692 | PM i-A FL-Net Function |
| A02B-0334-R964 | PM i-A FL-Net Port 2 Function |
| A02B-0339-J692 | 0i-TF FL-Net Function |
| A02B-0340-J692 | 0i-MF FL-Net Function |
| A02B-0349-J692 | 0i-TFP FL-Net Function |
| A02B-0350-J692 | 0i-MFP FL-Net Function |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-J692 | 30i-BP FL-NET Function |
| A02B-0353-R964 | 30i-BP FL-NET Port-2 Function |
| A02B-0356-J692 | 31i-B5P FL-NET Function |
| A02B-0356-R964 | 31i-B5P FL-NET Port-2 Function |
| A02B-0357-J692 | 31i-BP FL-NET Function |
| A02B-0357-R964 | 31i-BP FL-NET Port-2 Function |
| A02B-0358-J692 | 32i-BP FL-NET Function |
| A02B-0358-R964 | 32i-BP FL-NET Port-2 Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

704 FL-net

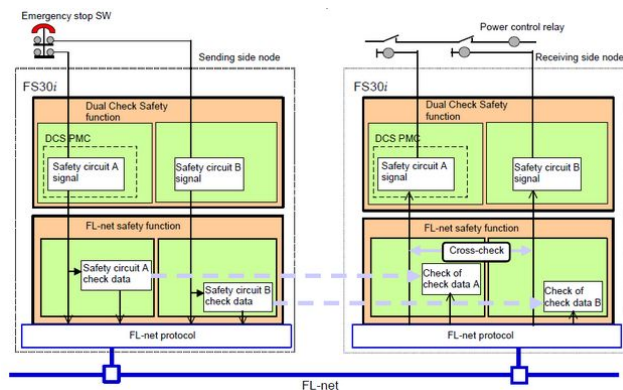

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

FL-net Safety

Features

In a machining system such as a transfer machine or a networked manufacturing cells, stations are each equipped with an operator's panel having an emergency stop button or other safety related signals.

Traditionally, it is necessary to implement a separate hardwired safety circuit for the entire system so that, when the emergency stop button at any station is pressed, the emergency stop signal can be transferred to all CNCs.

When using the Safety function on FL-net, the transmission of safety-related signals connected to safety circuits to multiple CNCs connected via FL-net is provided on a single network. In this case, the system cabling is simplified, the setup and commissioning is accelerated and the total cost of the system is reduced.

The Safety function of FL-net is an additional function of the Dual Check Safety function of the CNC. It operates on two CPUs as the Dual Check Safety function does. Refer to "Dual Check Safety" section of the catalogue for further details on the safety functions of the CNC.

Basic elements of the Safety function by FL-net are redundant nodes on the sending side and the receiving side. A safe circuit for the line is implemented by the combination of these nodes. The sending node adds proofing data to each of the redundant signals of the safety circuit and sends these signals safely. The receiving node checks the proofing data and cross-checks the received signal data to ensure that there is no error in the FL-net communication.

Benefits

- Simplified connection of Robots, CNC and PLCs with Safety Function transmitted over the FL-net network
- Simplification of the architectures
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-J692 | 30i-B FL-Net Function |
| A02B-0323-S851 | 30i-B Safety Function by FL-Net |
| A02B-0326-J692 | 31i-B5 FL-Net Function |
| A02B-0326-S851 | 31i-B5 Safety Function by FL-Net |
| A02B-0327-J692 | 31i-B FL-Net Function |
| A02B-0327-S851 | 31i-B Safety Function by FL-Net |
| A02B-0328-J692 | 32i-B FL-Net Function |

705

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0328-S851 | 32i-B Safety Function by FL-Net |
| A02B-0333-J692 | 35i-B FL-Net Function |
| A02B-0333-S851 | 35i-B Safety Function by FL-Net |
| A02B-0334-J692 | PM i-A FL-Net Function |
| A02B-0334-S851 | PM i-A Safety Function by FL-Net |
| A02B-0339-S851 | 0i-TF Safety Function by FL-Net |
| A02B-0340-S851 | 0i-MF Safety Function by FL-Net |
| A02B-0349-S851 | 0i-TFP Safety Function by FL-Net |
| A02B-0350-S851 | 0i-MFP Safety Function by FL-Net |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-J692 | 30i-BP FL-NET Function |
| A02B-0353-S851 | 30i-BP Safety Function by FL-NET |
| A02B-0356-J692 | 31i-B5P FL-NET Function |
| A02B-0356-S851 | 31i-B5P Safety Function by FL-NET |
| A02B-0357-J692 | 31i-BP FL-NET Function |
| A02B-0357-S851 | 31i-BP Safety Function by FL-NET |
| A02B-0358-J692 | 32i-BP FL-NET Function |
| A02B-0358-S851 | 32i-BP Safety Function by FL-NET |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

706

Communication

CC-Link

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

707

CC-Link



CC-Link Remote Device

Features

The CC-Link Remote Device function and CC-Link board can be used to connect to the CNC to the CC-Link fieldbus of Mitsubishi Electric.

The CC-Link functions of the Series 30i/31i/32i-A/B can be operated as remote device stations (slave stations) and can communicate with control units compliant with CC-Link master stations.

Specification:

- Transfer rate (Baud rate): 156K/625K/2.5M/5M/10M bps.
- Station number: 1 to 64
- Number of occupied stations: 1 to 4
- Maximum transfer data size (when 4 stations are occupied):
 - Remote output RY: 16 bytes (128 bits), user area 14 bytes, system 2 bytes
 - Remote input RY: 16 bytes (128 bits), user area 14 bytes, system 2 bytes
 - Remote register RWw: 16 words (32 bytes)
 - Remote register RWr: 16 words (32 bytes)

Note:

- The CC-Link functions cannot be used simultaneously as the DeviceNet functions or the PROFIBUS-DP functions

Benefits

- Connect to PLCs and equipment using CC-Link network
- Decrease of the time required to design and setup the system
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------|
| A02B-0323-J320 | 30i/31i/32i/35i-B, PM i-A CC-LINK Remote Device Station Board |
| A02B-0323-R954 | 30i-B CC-LINK Remote Device Function |
| A02B-0326-R954 | 31i-B5 CC-LINK Remote Device Function |
| A02B-0327-R954 | 31i-B CC-LINK Remote Device Function |
| A02B-0328-R954 | 32i-B CC-LINK Remote Device Function |
| A02B-0333-R954 | 35i-B CC-LINK Remote Device Function |
| A02B-0334-R954 | PM i-A CC-LINK Remote Device Function |
| A02B-0338-J320 | 0i-F CC-LINK Remote Device Board |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

708

| Specification | Description |
|----------------|----------------------------------------------------|
| A02B-0339-R954 | 0i-TF CC-LINK Remote Device Function |
| A02B-0340-R954 | 0i-MF CC-LINK Remote Device Function |
| A02B-0348-J320 | 0i-FP CC-Link Remote Device Station Board |
| A02B-0349-R954 | 0i-TFP CC-Link Remote Device Function |
| A02B-0350-R954 | 0i-MFP CC-Link Remote Device Function |
| A02B-0353-J320 | 30i/31i/32i-BP CC-LINK Remote Device Station Board |
| A02B-0353-R954 | 30i-BP CC-LINK Remote Device Function |
| A02B-0356-R954 | 31i-B5P CC-LINK Remote Device Function |
| A02B-0357-R954 | 31i-BP CC-LINK Remote Device Function |
| A02B-0358-R954 | 32i-BP CC-LINK Remote Device Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

709

CC-Link



CC-Link IE Field

Features

CC-Link IE Field is a field network to transfer DI/DO signals with high speed (1Gbps) and large capacity by using Ethernet. It is possible to connect various devices such as CNCs, PLCs and sensors conforming to CC-Link IE Field. FANUC CNCs operate as a slave stations (intelligent device station) and communicate with CC-Link IE master devices.

Specification:

- Communication speed: 1Gbps
- Station number: 1 to 120
- Maximum transfer data size:
 - Remote output RY: 256 bytes (2048 bits)
 - Remote input RX: 256 bytes (2048 bits)
 - Remote register RWw: 1024 words
 - Remote register RWr: 1024 words

Benefits

- Connect to PLCs and equipment using CC-Link network
- Decrease of the time required to design and setup the system
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0353-J321 | 30i/31i/32i-BP CC-Link IE Field Board |
| A02B-0353-R983 | 30i-BP CC-Link IE Field Slave Function |
| A02B-0356-R983 | 31i-B5P CC-Link IE Field Slave Function |
| A02B-0357-R983 | 31i-BP CC-Link IE Field Slave Function |
| A02B-0358-R983 | 32i-BP CC-Link IE Field Slave Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

710

Communication



QSSR CONNECT

Features

The acronym QSSR stands for "Quick and Simple Startup of Robotization". QSSR CONNECT (QSSR for CNC and Robot) is an interface between machine tools with FANUC CNC and FANUC robots.

Loading and unloading machine tools with a robot improves productivity. Using this function, you can combine a FANUC robot and up to 4 machine tools with FANUC CNCs quickly and easily. CNC and robot are connected by an Ethernet cable. Function blocks are provided in order to speed up ladder development. And guidance functions help you to set up everything properly.

You can operate the robot from a machining program by an M code, e.g. to exchange the workpiece in the machine tool. You can jog the robot and check its status from the CNC on dedicated iHMI screens.

Benefits

- Utilize robots to increase machine tool productivity
- Save time and money by speeding up robot integration

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-R011 | 30i-B QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0326-R011 | 31i-B5 QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0327-R011 | 31i-B QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0328-R011 | 32i-B QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0339-R011 | 0i-TF QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0340-R011 | 0i-MF QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0349-R011 | 0i-TFP QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0350-R011 | 0i-MFP QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0353-R011 | 30i-BP QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0356-R011 | 31i-B5P QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0357-R011 | 31i-BP QSSR CONNECT (QSSR for CNC and Robot) |
| A02B-0358-R011 | 32i-BP QSSR CONNECT (QSSR for CNC and Robot) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

711

Communication

High Speed Serial Bus (HSSB)

Features

The FANUC HSSB (High Speed Serial Bus) is a FANUC proprietary communication protocol and hardware designed for point to point communication. It can be used to communicate between a CNC and a Panel i or between a CNC and a Personal Computer. The bus is mainly used within the "Open CNC" concept of FANUC.

The HSSB communication uses Fiber Optics cables as transmission media; it is therefore very robust and noise immune.

FANUC provides optional boards for certain CNC models and PCI cards for Personal Computers. The Panel i PC display units and recent FANUC CNC feature on-board HSSB ports.

The PORT2 function provides the capability to operate the same function on different hardware boards at the same time. Example: if the HSSB function and the HSSB PORT2 function are specified, it is possible to connect 2 Personal Computers to one CNC at the same time.

Related functions:



- FOCAS / FOCAS 2
- Basic Operation Package 2
- Ladder Editing Package
- DNC Management Package
- CNC Screen Display Function

Benefits

- Simple, robust and noise immune connection between CNC and Personal Computers or Panel i
- Simplification of the integration of an "Open CNC" concept
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------|
| A02B-0207-J900 | 30i/31i/32i-A, 30i/31i/32i/35i-B, PM i-A Extended Drivers and Libraries |
| A02B-0323-J202 | 30i/31i/32i-B - CNC Side HSSB Interface Board A |
| A02B-0323-S749 | 30i-B FOCAS2 / HSSB Port 2 Function |
| A02B-0326-S749 | 31i-B5 FOCAS2 / HSSB Port 2 Function |
| A02B-0327-S749 | 31i-B FOCAS2 / HSSB Port 2 Function |
| A02B-0328-S749 | 32i-B FOCAS2 / HSSB Port 2 Function |
| A02B-0338-J202 | 0i-F CNC Side HSSB Interface Board A |
| A02B-0339-S749 | 0i-TF FOCAS2 / HSSB Port 2 Function |

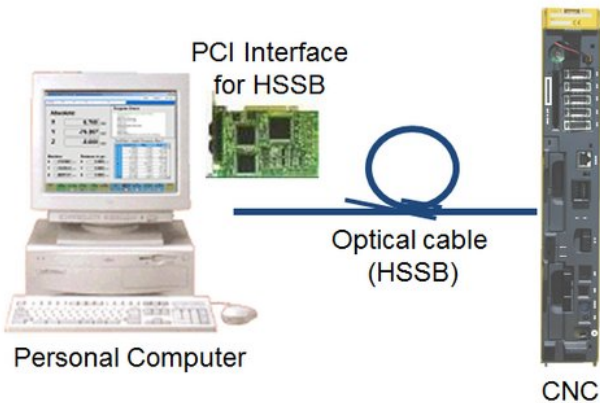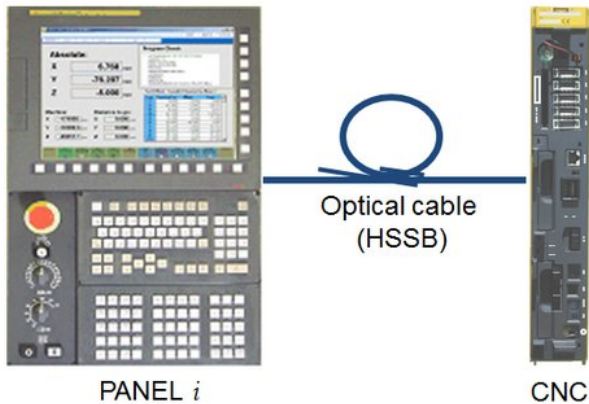

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

712

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0340-S749 | 0i-MF FOCAS2 / HSSB Port 2 Function |
| A02B-0348-J202 | 0i-FP CNC Side HSSB Interface Board A |
| A02B-0353-J202 | 30i/31i/32i-BP CNC Side HSSB Interface Board A |
| A02B-0353-S749 | 30i-BP FOCAS2 / HSSB Port-2 Function |
| A02B-0356-S749 | 31i-B5P FOCAS2 / HSSB Port-2 Function |
| A02B-0357-S749 | 31i-BP FOCAS2 / HSSB Port-2 Function |
| A02B-0358-S749 | 32i-BP FOCAS2 / HSSB Port-2 Function |
| A13B-0204-C021 | PC Side HSSB Interface Board (1 Channel) for PCI Express Bus (Low Profile) - to communicate to CNC Models FS 30i/31i/32i-A/B, 35i-B, Power Motion i-A or 0i-D |
| A13B-0204-C022 | PC Side HSSB Interface Board (1 Channel) for PCI Express Bus (Standard Height) - to communicate to CNC Models FS 30i/31i/32i-A/B, 35i-B, Power Motion i-A or 0i-D |
| A20B-8001-0960 | PC Side HSSB Interface Board Type 2 (2 Channels, PCI Bus) |
| A20B-8001-0961 | PC Side HSSB Interface Board Type 2 (1 Channel, PCI Bus) |
| A20B-8101-0162 | PC Side HSSB Interface Board (2 Channels, PCI Bus) |
| A20B-8101-0163 | PC Side HSSB Interface Board (1 Channel, PCI Bus) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

713

Communication



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Robot Connection Function

Features

A standard interface between a FANUC robot and any machine tool equipped with a FANUC CNC significantly reduces the integration time and cost. Simple customizable wizards built into the robot pendant step the integrator through the settings for the I/O interface, grippers, programs and positions.

FANUC robots and up to four FANUC CNCs can be easily connected into a system using Ethernet or I/O Link. Robot operation and monitoring can be performed through one of integrated FANUC CNC screens in a cell without entering the safety zone of the robot. Custom CNC screens can be quickly created by the integrator using FANUC Picture to simplify the cell operation. Similarly, screens on the robot pendant can also be used for complete CNC and robot system operation and monitoring.

NCGuidePro and ROBOGUIDE simulators can be used on a PC to test, debug and program the integrated system. The integrated simulation systems can be used to teach the robot accurate workpiece exchange positions. CNC part programs can be executed and the total system operation can be visualized.

The Robot Connection Function provides the following functionalities:

- Connection of CNC and Robot
- Display of the robot status and operation (jog robot axes in "joint" or "cartesian" modes, issue macro programs for gripper control, etc.) on the CNC screen
- Display of CNC status and operation (jog of the feed axes, adjustment of tool offsets) on the iPendant of the Robot

To speed up the setup of this function on both Robot and CNC, robot connection sample programs are provided; it includes FANUC PICTURE sample screens for robot remote operation for the CNC as well as ladder programs for the CNC and the Robot. All programs can be customised if required.

Benefits

- Easy connection of FANUC CNC and robots
- Time saving during development and setup
- Improvement of the system efficiency
- Decrease of the Total Cost of Ownership (TCO)

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------------------------|
| A02B-0323-R683 | 30i-B Robot Connection Function - Machine Tool Connection Function (A05B-2500-J984) Required on Robot Control |

| Specification | Description |
|----------------|-------------------------------------------------------------------------------------------------------------------|
| A02B-0326-R683 | 31i-B5 Robot Connection Function - Machine Tool Connection Function (A05B-xxxx-J984) Required on Robot Control |
| A02B-0327-R683 | 31i-B Robot Connection Function - Machine Tool Connection Function (A05B-2500-J984) Required on Robot Control |
| A02B-0328-R683 | 32i-B Robot Connection Function - Machine Tool Connection Function (A05B-2500-J984) Required on Robot Control |
| A02B-0333-R683 | 35i-B Robot Connection Function - Machine Tool Connection Function (A05B-2500-J984) Required on Robot Control |
| A02B-0334-R683 | PM i-A Robot Connection Function - Machine Tool Connection Function (A05B-2500-J984) Required on Robot Control |
| A02B-0339-R683 | 0i-TF Robot Connection Function |
| A02B-0340-R683 | 0i-MF Robot Connection Function |
| A02B-0349-R683 | 0i-TFP Robot Connection Function |
| A02B-0350-R683 | 0i-MFP Robot Connection Function |
| A02B-0353-R683 | 30i-BP Robot Connection Function |
| A02B-0356-R683 | 31i-B5P Robot Connection Function |
| A02B-0357-R683 | 31i-BP Robot Connection Function |
| A02B-0358-R683 | 32i-BP Robot Connection Function |
| A08B-9510-J550 | 30i/31i/32i-A, 30i/31i/32i/35i-B, PM i-A, 0i-D Robot Connection Function Sample Programs |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

715

Communication



Modbus/TCP Server

Features

Modbus/TCP Server function enables the connection to PLCs and equipment via the Modbus protocol over Ethernet. Modbus is a very popular protocol which is available on many automation devices. The Modbus/TCP function provides an easy way to setup the system installation and the connection to many PLCs, supervision systems and equipment using Modbus/TCP.

The Modbus/TCP Server function can be used on the following Ethernet hardware:

- The "Embedded Ethernet port" of the Series 30i/31i/32i/35i-B CNC and Power Motion i-A
- The "Fast Ethernet board" of the Series 30i/31i/32i-A CNC, the Series 30i/31i/32i/35i-B CNC, the Power Motion i-A and the Series 0i-D CNC
- The "Multi-Function Ethernet port" of the Series 30i/31i/32i/35i-B and Power Motion i-A LCD-Mounted type

Notes:

- When Modbus/TCP is used on the "Embedded Ethernet port" of the CNC, the number of clients connected at the same time to the CNC is limited to 3 instead of 10 for the "Fast Ethernet board" or the "Multi-Function Ethernet port".
- Refer to the connection manual for additional information on the Modbus/TCP data type supported, the size of the data tables as well as the function specifications.
- The Ethernet hardware of the CNC supports several concurrent protocols and connections. Refer to the connection manuals for details and limitations that may exist.
- If using Modbus/TCP with the "Multi-Function Ethernet port" or the "Fast Ethernet board", the "Ethernet Function" (see "Fast Ethernet") is required.

This function is a basic function in FANUC Series 30i-B Plus.

Benefits

- Connect to PLCs and equipment by ModBus/TCP network over Ethernet
- Acceleration of the system installation and commissioning
- Improvement of machine flexibility and increase of the system efficiency / productivity

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------------|
| A02B-0323-J147 | 30i/31i/32i/35i-B, PM i-A Fast Ethernet Board |
| A02B-0323-R968 | 30i-B Modbus/TCP Server Function |
| A02B-0326-R968 | 31i-B5 Modbus/TCP Server Function |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

716

| Specification | Description |
|----------------|-------------------------------------------------|
| A02B-0327-R968 | 31i-B Modbus/TCP Server Function |
| A02B-0328-R968 | 32i-B Modbus/TCP Server Function |
| A02B-0333-R968 | 35i-B Modbus/TCP Server Function |
| A02B-0334-R968 | PM i-A Modbus/TCP Server Function |
| A02B-0339-R968 | 0i-TF Modbus/TCP Server Function |
| A02B-0340-R968 | 0i-MF Modbus/TCP Server Function |
| A02B-0349-R968 | 0i-TFP MODBUS/TCP Server Function |
| A02B-0350-R968 | 0i-MFP MODBUS/TCP Server Function |
| A02B-0353-J147 | 30i/31i/32i-BP FAST ETHERNET Board (100BASE-TX) |
| A02B-0353-R968 | 30i-BP MODBUS / TCP Server Function |
| A02B-0356-R968 | 31i-B5P MODBUS / TCP Server Function |
| A02B-0357-R968 | 31i-BP MODBUS / TCP Server Function |
| A02B-0358-R968 | 32i-BP MODBUS / TCP Server Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

717

Communication

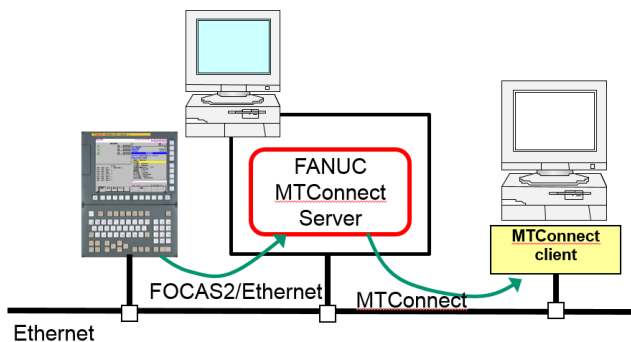

MTConnect Server Function

Features

MTConnect is a protocol to retrieve data from factory equipment such as machine tools by client applications used for data analysis and monitoring. With the software "FANUC MTConnect Server", you can read data from machine tools equipped with FANUC CNCs. The software collects data from CNCs and PMCs and provides them to client applications via MTConnect protocol.

This option is required on the CNC in order to use the "FANUC MTConnect Server" software.

Benefits

- Read data from FANUC CNCs and PMCs via MTConnect
- Use client applications from the market that require MTConnect

Ordering Information

| Specification | Description |
|----------------|-----------------------------------|
| A02B-0303-R982 | 30i-A MTConnect Server Function |
| A02B-0306-R982 | 31i-A5 MTConnect Server Function |
| A02B-0307-R982 | 31i-A MTConnect Server Function |
| A02B-0308-R982 | 32i-A MTConnect Server Function |
| A02B-0319-R982 | 0i-TD MTConnect Server Function |
| A02B-0320-R982 | 0i-MD MTConnect Server Function |
| A02B-0323-R982 | 30i-B MTConnect Server Function |
| A02B-0326-R982 | 31i-B5 MTConnect Server Function |
| A02B-0327-R982 | 31i-B MTConnect Server Function |
| A02B-0328-R982 | 32i-B MTConnect Server Function |
| A02B-0333-R982 | 35i-B MTConnect Server Function |
| A02B-0339-R982 | 0i-TF MTConnect Server Function |
| A02B-0340-R982 | 0i-MF MTConnect Server Function |
| A02B-0349-R982 | 0i-TFP MTConnect Server Function |
| A02B-0350-R982 | 0i-MFP MTConnect Server Function |
| A02B-0353-R982 | 30i-BP MTConnect Server Function |
| A02B-0356-R982 | 31i-B5P MTConnect Server Function |
| A02B-0357-R982 | 31i-BP MTConnect Server Function |
| A02B-0358-R982 | 32i-BP MTConnect Server Function |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

718

Communication

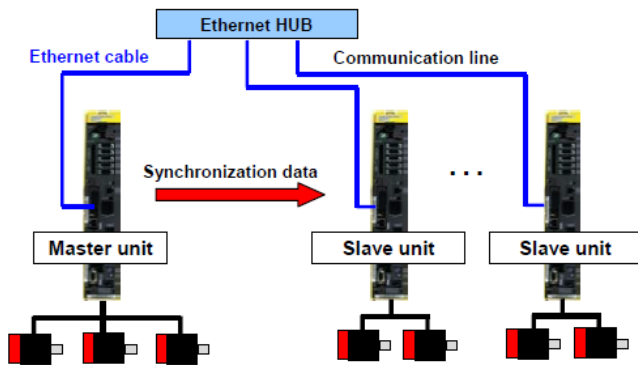

Inter-Unit Synchronization (Power Motion i-A)

Features

With Inter-Unit Synchronization, it is possible to synchronize axes that are controlled by different Power Motion controllers. Up to 7 slave units can be connected to one master unit by an Ethernet-based communication line. Any axis on a slave unit can be synchronized with an axis on the master unit. Up to 256 synchronized axes can be controlled this way.

The Inter-Unit Synchronous Board has to be mounted on each unit. The Multi-Axes Synchronous function and the FL-net function options are required to use Inter-Unit Synchronization.

Benefits

- Synchronize more than 32 axes controlled by Power Motion

Ordering Information

| Specification | Description |
|----------------|-------------------------------------|
| A02B-0334-J149 | PM i-A Inter-Unit Synchronous Board |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

719

Communication

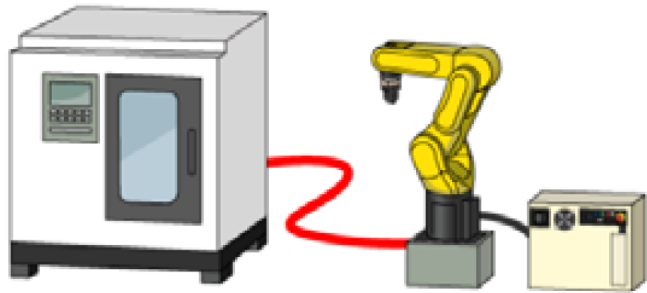

QSSR G-CODE

Features

The acronym QSSR stands for "Quick and Simple Startup of Robotization". With QSSR G-CODE, you can control a FANUC robot from a FANUC CNC by G-code commands.

Loading and unloading machine tools with a robot improves productivity. Instead of using robot language, it is possible to control the robot using programming methods that are familiar to machine tool users. In addition, using the robot program creation screen on CNC, you can create a robot operation program while positioning the robot with a manual handle.

Benefits

- Utilize robots to increase machine tool productivity
- Save time and money by speeding up robot integration

Ordering Information

| Specification | Description |
|----------------|---------------------|
| A02B-0323-R012 | 30i-B QSSR G-Code |
| A02B-0326-R012 | 31i-B5 QSSR G-Code |
| A02B-0327-R012 | 31i-B QSSR G-Code |
| A02B-0328-R012 | 32i-B QSSR G-Code |
| A02B-0339-R012 | 0i-TF QSSR G-Code |
| A02B-0340-R012 | 0i-MF QSSR G-Code |
| A02B-0349-R012 | 0i-TFP QSSR G-Code |
| A02B-0350-R012 | 0i-MFP QSSR G-Code |
| A02B-0353-R012 | 30i-BP QSSR G-Code |
| A02B-0356-R012 | 31i-B5P QSSR G-Code |
| A02B-0357-R012 | 31i-BP QSSR G-Code |
| A02B-0358-R012 | 32i-BP QSSR G-Code |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

720

CNC

Software FA

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

721

Software FA

PC Software

This section groups all the different software products that are used when dealing with CNC systems such as

- Software for Operator Control (e.g. Manual Guide)
- Development Software (e.g. FANUC Ladder, C-Executor, ...)
- PC Operating Software (e.g. Windows®)
- HMI Software (e.g. FANUC Picture)



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

722

PC Software



iHMI

Features

iHMI is FANUC's new user interface. It has been designed to be extremely easy to use. Intuitive menu icons, high-visibility design and animated features take the head-scratching out of complex machining operations, making accessing even the most sophisticated programs and functionalities straightforward. Despite its more intuitive layout, users will nevertheless find that it provides a familiar FANUC user experience.

This disk contains the iHMI software for PANEL iH and PANEL iH Pro.

Benefits

- Easy and simple operation
- Intuitive icons and high-visibility design
- Easy troubleshooting

Ordering Information

| Specification | Description |
|---------------------|---------------------------------------------------------------------------------|
| A02B-0207-K777 | iHMI Disk - for CNC Series 30i/31i/32i/35i-B |
| A02B-0207-K778 | iHMI Disk - for CNC Series 30i/31i-LB/PB and 30i/31i/32i-B with Laser Functions |
| A02B-0207-K779 | iHMI Disk - for CNC Series 0i-TF Plus / 0i-MF Plus |
| A02B-0207-K786 | iHMI Disk - for Power Motion i-A |
| A02B-0207-K787 | iHMI Disk - for CNC Series 0i-LF Plus |
| A02B-0207-K788 | iHMI Disk - for CNC Series 30i/31i/32i-B Plus |
| A02B-0207-K789 | iHMI Disk - for CNC Series 30i/31i-LB PLUS |
| A02B-0207-K795 | IHMI DISK 30i-B/STEP2 |
| A02B-0207-K796 | HMI DISK 30i-B PLUS/STEP2 |
| A08B-9110-J728#ZZ12 | iHMI Disk (for Standard IPC) |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

723

PC Software

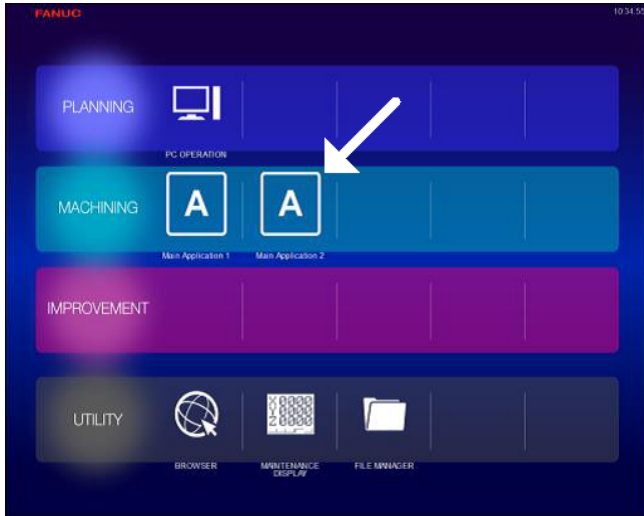

iHMI Application SDK for PANEL iH

Features

The iHMI Application SDK for Panel iH is a software development kit for the development of iHMI applications on Windows Embedded Compact 7. The necessary documents and libraries for the development of iHMI applications with Visual Studio 2008 are included.

Benefits

- Personalize iHMI on Panel iH with customer-specific applications easily

Ordering Information

| Specification | Description |
|---------------------|--------------------------------------------------------------|
| A08B-9110-J713#ZZ11 | iHMI Application SDK (Software Development Kit) for PANEL iH |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

724

PC Software

CNC Application Development Kit

Features

The CNC Application Development Kit is a software package that contains various tools and applications that are useful for machine tool builder. This package contains the following applications:

- FANUC PICTURE
- FOCAS2 Library
- CNC Screen Display Function (HSSB / Ethernet)
- Basic Operation Package 2
- Ladder Editing Package
- Machining Status Monitor Package (HSSB / Ethernet)
- Machine Operation Menu Making Tool
- Main Menu Screen Customization Tool
- Guidance Table for Machine Alarm Diagnosis
- Macro Library (30i / 0i-F / 0i-D / Power Motion i)
- C-Language Library (30i/0i-F / 30i-B CPU-D / 0i-D / Power Motion i)
- Acceptance Test Assist Tool
- Electronic Cam Support Tool
- Operation History Converter Tool
- iHMI Library for PANEL iH Pro
- Execution Macro Converter
- G-code Guidance Customization Tool

Software Spec: A08B-9010-J555#ZZ12

Ordering Information

| Specification | Description |
|---------------------|---------------------------------|
| A08B-9010-J555#ZZ12 | CNC Application Development Kit |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

725

PC Software

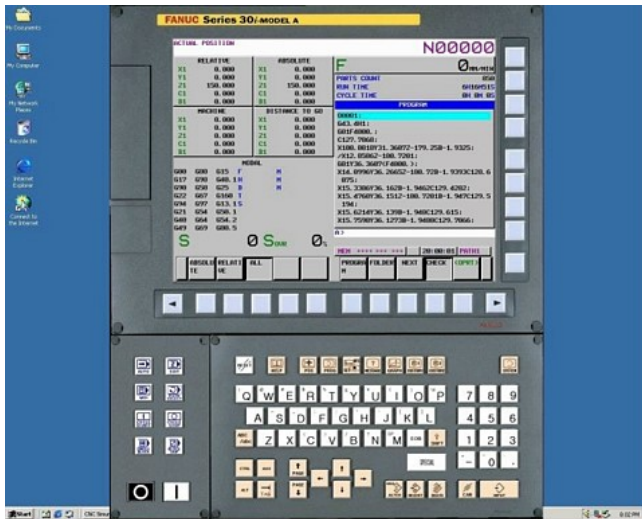

CNC GUIDE

Features

CNC GUIDE and CNC GUIDE Academic Package are FANUC's CNC software running on a PC. They are available with single or multiseat licences. This is the ideal solution for a dedicated training room or development team.

CNC GUIDE

CNC GUIDE provides a realistic operation and part programming environment at a fraction of the cost of using a production machine tool. This translates into lower training costs. It supports both conventional G-code programming, including canned cycles and custom macros, and FANUC's conversational programming, MANUAL GUIDE i.

Comprehension and retention is enhanced as students perform repetitive hands-on exercises in an ergonomically friendly environment - away from the noise of the factory floor. Operators, programmers, and maintenance engineers can all practice common procedures and develop optimized processes without risks to people, tooling or machines.

- The simulation emulates the CNC exactly, which means programs can be written, tested and optimized on the PC bringing productivity gains by working offline and keeping the machine in production.
- Simulators fit to a classroom situation and so both educational and industrial training is easily implemented resulting in better educated and highly motivated staff.

CNC GUIDE provides a superior software development environment for FANUC CNCs, by adding the PMC ladder and machine signal simulation capabilities, and support for the standard FANUC operator panel. When combined with other FANUC software development tools (FANUC LADDER III, FANUC PICTURE, C- and MACRO EXECUTOR), CNC GUIDE provides a more efficient development environment than an actual CNC.

Ordering Information

| Specification | Description |
|---------------------|-----------------------------------------------------------------------------|
| A08B-9010-J770#ZZ12 | FANUC CNC GUIDE (1 User) |
| A08B-9010-J771#ZZ12 | FANUC CNC GUIDE (10 Users) |
| A08B-9010-J772#ZZ12 | FANUC CNC GUIDE (20 Users) |
| A08B-9010-J773#ZZ12 | FANUC CNC GUIDE (Site License) |
| A08B-9010-J774#ZZ12 | FANUC CNC GUIDE (Update) - for Updating A08B-9010-J770#ZZ12 - ...-J773#ZZ12 |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

726

CNC GUIDE

Cycle Time Estimate Function for CNC GUIDE

Features

The Cycle Time Estimation Function is a Personal Computer tool that can quickly estimate the machining cycle time of NC program. With this function, the following estimations are delivered by the software (refer to illustration):

- Travel distance [1]
- Cycle time [2]
- Path drawing [3]

Key highlights

- The accuracy of the estimation made is higher than estimations made with 3rd party software; the reason of this higher accuracy is that the cycle time is calculated including the acceleration / deceleration
- The target program can be selected and the NC parameter can be set as on a real machine and CNC using CNC GUIDE
- The machining time of a complex program can be estimated, for example from a 5-axis machining cycle

Details of the estimated data

Because not only the entire cycle time of specified NC program but also time of rapid traverse and cutting, as well as distance are calculated, the tool provides a very efficient method to optimize machining cycles, decrease the processing time and extend the tool life.

The Estimation Function is available for the program of machining center and one path and provides the following details:

- Entire processing time
- Rapid traverse time
- Cutting feed time (calculated with the time of acceleration / deceleration but without taking in consideration the lag provided by the servo motors, the spindle and the machine time)
- Processing time of miscellaneous functions (the total of the time of each M/S/T/B code set beforehand is multiplied at the entire processing time)
- Macro processing time (Custom Macro and Execution Macro can be executed except that the macro processing time is not included in the entire processing time)
- Rapid traverse distance
- Cutting feed distance (traveled distance of the tool center point is calculated)


Supported CNC

Series 30i/31i/32i-MODEL B

NC program

```
O0100
N1 E001
N2 G00 X100.12 Y54.34
N3 G24 R100
N4 G01 X250.89 Y72.45
:
```

Estimation

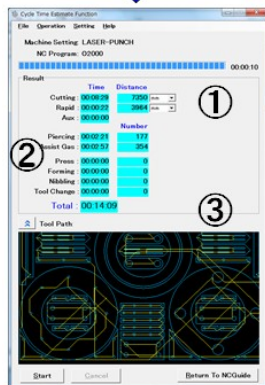

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Accuracy

The accuracy of the estimation time depends on many factors, but essentially is linked to the type of machining process. The estimation reaches a higher accuracy under the following conditions:

- When the processing time of the estimated machining duration is longer
- When the ratio of cutting and rapid traverse is higher
- When the ratio of miscellaneous function is lower

Benefits

- Optimization of machining cycles (reduction of time, increase of accuracy and reduction of tool wear)
- Increase of the machine productivity
- Reduction of trials with real cutting, especially for expensive materials

Ordering Information

| Specification | Description |
|---------------------|-------------------------------------------------------------------|
| A08B-9010-J753#ZZ12 | Disk for Cycle Time Estimate Function (for NCGuide), DVD |
| A08B-9010-J757#ZZ12 | Disk for Cycle Time Estimate Function (for NCGuide), DVD - Update |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

728

CNC GUIDE



CNC GUIDE Academic Package

Features

The CNC GUIDE Academic Package is a special variant of CNC GUIDE for schools and universities. It's the ideal tool for individual or group training. To suit educational purposes, the Functionality has been reduced and the license model has been adapted.

Ordering Information

| Specification | Description |
|---------------------|--------------------------------------------------------------------------------------------------------------|
| A08B-9010-J751#ZZ12 | FANUC NCGuide Academic Package (Classroom) - License for 16 PCs Connected to Network (DVD) |
| A08B-9010-J752#ZZ12 | FANUC NCGuide Academic Package (Student) - License for 1 PC Not Connected to Network, Valid for 1 Year (DVD) |
| A08B-9010-J761#ZZ12 | FANUC NCGuide Academic Package (Classroom) - Licence for 32 Users |
| A08B-9010-J762#ZZ12 | FANUC NCGuide Academic Package (Homework) - Licence for 1 User, Valid for 3 Years |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

729

PC Software

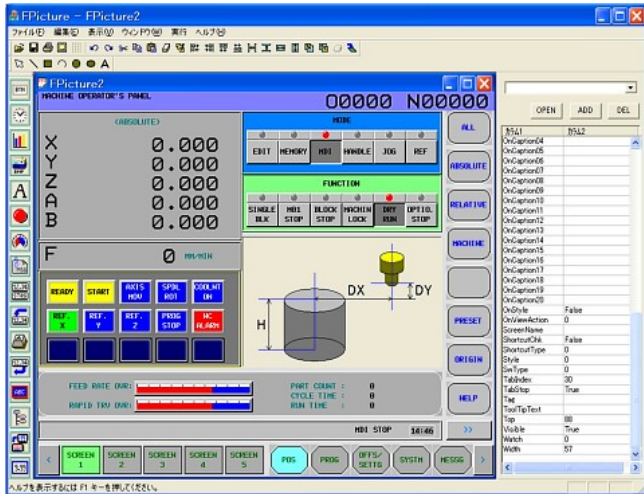

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

FANUC PICTURE

Features

The FANUC PICTURE software provides a rich set of functions and tools to design and implement customized Human Machine Interfaces (HMI) on the FANUC CNC.

The projects created by FANUC PICTURE are compiled to a format that can be executed directly by the CNC and displayed on the standard LCD screen without requiring additional Personal Computer display.

Key functions

- Support of many screen sizes and resolutions
- Support of touch screens, including virtual keypads
- WYSIWYG editor
- Rich set of controls such as keys, switches, push buttons, touch buttons, lamps, scales, etc.
- Many parameters can be adjusted for each of the objects
- No need to program, just draw and parameter
- Support of multi-language HMI application
- Easy import-export of projects, variables, descriptions and translations
- Script language (scheduled or event driven) to execute complex tasks


FANUC PICTURE is part of the CNC Application Development Kit.

Benefits

- Creation of customized HMI on the FANUC CNC
- Powerful HMI without the requirement of PC hardware
- Simple modification of the HMI to follow machine and production evolution

730

PC Software

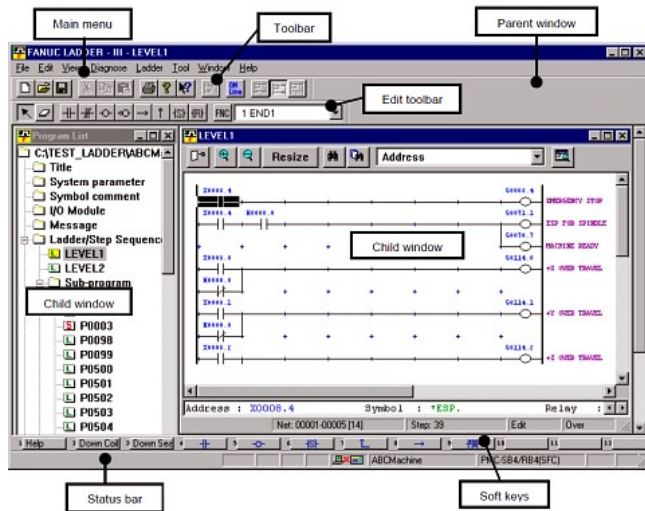

FANUC LADDER-III

Features

FANUC LADDER-III is the standard programming system for developing, diagnosing and maintaining sequence programs for CNC PMC ladder, FANUC's integrated PLC.

Key functions

- Creating, displaying, editing and printing ladder sequence programs
- Monitoring and debugging ladder sequence programs
- Support of the creation, debugging and management of Function Blocks
- Program monitoring
- PMC signal status display
- PMC signal trace
- Writing to flash ROM
- Connection to the CNC via Ethernet
- Works with NCGuidePro on one or multiple PCs

Supported PMC Types

- CNC Series 30i/31i/32i/35i-MODEL Band Power Motion i-MODEL A (refer to the PMC Programming Manual B-64513EN)
- CNC Series 30i/31i/32i-MODEL A (refer to the PMC Programming Manual B-63983EN)
- CNC Series 0i-MODEL D, and Series 0i Mate-MODEL D (refer to PMC Programming Manual B-64393EN)
- Legacy PMC systems MODEL PA1 / PA3 / SA1 / SA2 / SA3 / SA5 / SB / SB2 / SB3 / SB4 / SB5 / SB6 / SB7 / SC / SC3 / SC4 / NB / NB2 / NB6 (refer to the Ladder Language Programming Manual B-61863E)

Benefits

- Creation of the machine PMC program, startup and debug
- Modification of the PMC program to follow machine and production evolution
- Rich maintenance and diagnostics capabilities of the PMC and machine control

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------------------------------------|
| A02B-0200-K814 | RS232C Cable for Programm Transmission and Online Monitor: PC (SUB-D 9 Pins) <--> Punch Panel (SUB-D 25 Pins), Length 7 m |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

731

| Specification | Description |
|----------------|---------------------------------------------------------|
| A08B-9210-J505 | FANUC LADDER III - for Windows Vista / 7 / 8 / 8.1 / 10 |
| A08B-9210-J541 | FANUC LADDER III (10 Users) Japanese / English |
| A08B-9210-J542 | FANUC LADDER III (20 Users) Japanese / English |
| A08B-9210-J543 | FANUC LADDER III (Site License) Japanese / English |
| A08B-9210-J544 | FANUC LADDER III (Update) Japanese / English |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

732

PC Software

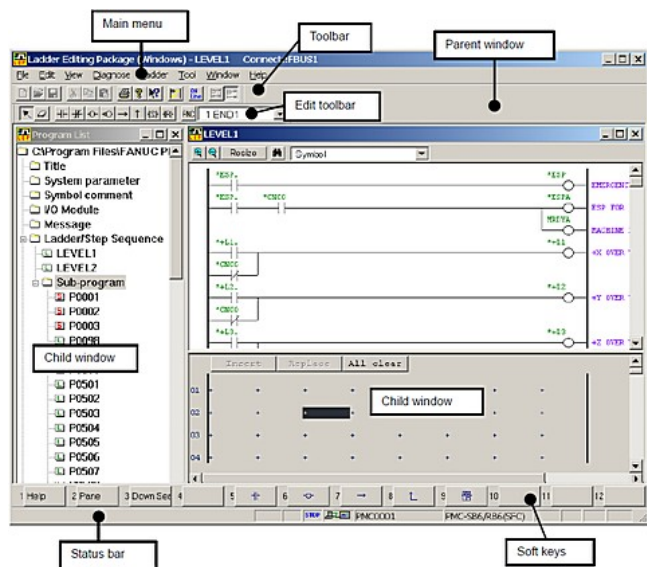

LADDER Editing Package

Features

LADDER Editing Package is a programming system for developing, diagnosing and maintaining sequence programs for CNC PMC ladder, FANUC's integrated PLC.

The LADDER Editing Package has been designed as a Windows® application which can reside on the Personal Computer display unit connected to a FANUC CNC (Open CNC).

Key functions

- Creating, displaying, editing and printing ladder sequence programs
- Monitoring and debugging ladder sequence programs
- Program monitoring
- PMC signal status display
- PMC signal trace
- Writing to flash ROM
- Connection to the CNC via Ethernet
- Works with NCGuidePro on one or multiple PCs

The LADDER Editing Package installation files are part of the CNC Application Development Kit.

Benefits

- Creation of the machine PMC program, startup and debug
- Modification of the PMC program to follow machine and production evolution
- Rich maintenance and diagnostics capabilities of the PMC and machine control

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0207-J820 | FANUC LADDER Editing Package - Ethernet |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

733

PC Software

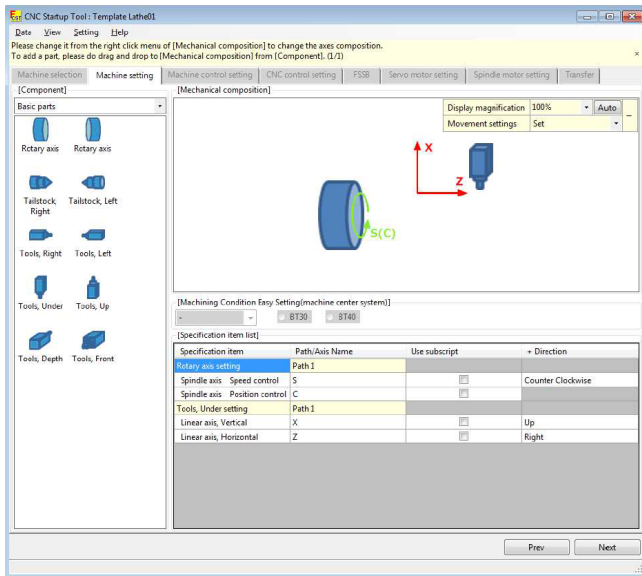

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

CNC Startup Tool

Features

CNC Start-up Tool is a PC software that creates parameters required for the start-up of a CNC. It creates parameters for FS0i-F and FS0i-F Plus. The parameters can be transferred from the software directly to a CNC connected to the same network.

It is possible to input the machine configuration as well as the motor and amplifier setup graphically. Just drag and drop predefined elements from a library.

With CNC Start-up Tool, you can easily create parameters for start-up at your desk and speed up the start-up of your machine.

Benefits

- Create parameters for start-up easily
- Speed up the start-up of your machines

Ordering Information

| Specification | Description |
|---------------------|-------------------------------------------------------|
| A08B-9010-J707#ZZ11 | CNC Start-up Tool (CD-R) - FS 0i-TF/MF, FS 0i-TFP/MFP |

734

PC Software

CNC Setting Tool

Features

CNC Setting Tool is a Windows® application software that can be used to display and edit parameter files. The software consists of different setting tools and a file management function for the parameter files. The setting tools included in the software package are:

- CNC Parameter Setting Tool (part of CNC Setting Tool)
- FL-net Setting Tool (part of CNC Setting Tool)
- PROFIBUS Setting Tool (part of CNC Setting Tool)
- EtherNet/IP Setting Tool (part of CNC Setting Tool)
- PROFINET Configuration Tool (stand-alone application)

Please refer to the following pages for details on a particular tool.

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------|
| A08B-9510-J540 | CNC Setting Tool, 1 User |
| A08B-9510-J541 | CNC Setting Tool, 10 Users |
| A08B-9510-J542 | CNC Setting Tool, 20 User |
| A08B-9510-J543 | CNC Setting Tool, Site License |
| A08B-9510-J544 | CNC Setting Tool, Update - Updating CNC Setting Tool A08B-9510-J540 ... -J543 |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

735

CNC Setting Tool

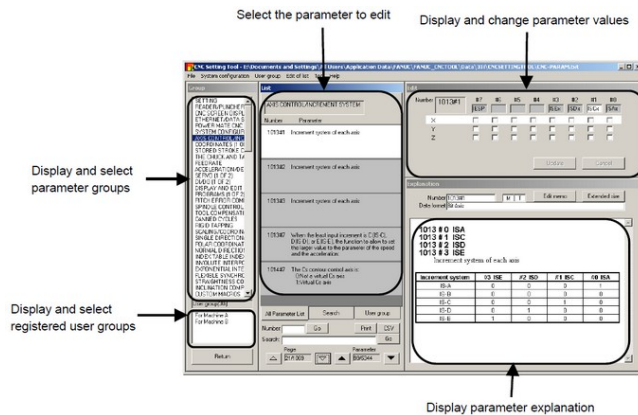

CNC Parameter Setting Tool

Features

CNC Parameter Setting Tool is part of the CNC Setting Tool and it can be used to display and edit CNC parameter files on Personal Computer.

Key functions

- Display and edit of a parameter file
- All parameters can be displayed in order
- Parameters can be displayed in the order of function
- Explanation of selected parameters
- Range check when changing limited parameters
- Comparison of master file and edited file
- Management of parameter files operated by CNC setting tool (Copy, Delete)
- Transfer of parameter files between CNC and PC (Ethernet or Memory card)
- Extract parameters and save them to the file
- Combine parameter files to create new parameter file

Benefits

- Simplified management of the CNC parameter setting
- Increase of the efficiency in managing multiple machine settings

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

736

CNC Setting Tool

EtherNet/IP Setting Tool

Features

The EtherNet/IP Setting Tool is part of the CNC Setting Tool and is used to efficiently set EtherNet/IP parameters in the CNC from a Personal Computer. The tool simplifies the management of large EtherNet/IP network sets.

This tool generates EtherNet/IP parameters for the CNC using the definition-data file of a slave devices (EDS files supplied by the device vendor). The generated parameters are transferred to the CNC via Ethernet.

Benefits

- Simplified management of EtherNet/IP network settings
- Increase of the efficiency in managing multiple machine settings and large networking projects

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

738

CNC Setting Tool

PROFIBUS Setting Tool


Features

The PROFIBUS Setting Tool is part of the CNC Setting Tool and is used to efficiently set PROFIBUS parameters in the CNC from a Personal Computer. The tool simplifies the management of large PROFIBUS network sets.

This software tool can generate PROFIBUS parameters for the CNC using the definition-data file of slave devices (GSD files supplied by the device vendor). The generated parameters are transferred to the CNC via Ethernet.

Benefits

- Simplified management of PROFIBUS network settings
- Increase of the efficiency in managing multiple machine settings and large networking projects

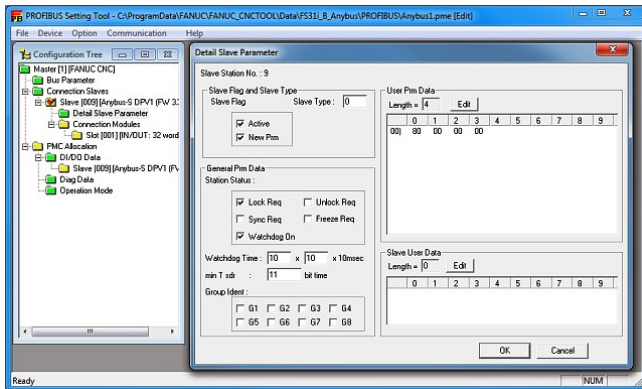

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

739

CNC Setting Tool

PROFINET Configuration Tool


Features

The PROFINET Configuration Tool is a Windows® application used to efficiently set PROFINET parameters in the CNC from a Personal Computer. The tool simplifies the management of large PROFINET network sets.

This software tool can generate PROFINET parameters for the CNC using the definition-data file of slave devices (GSDML files supplied by the device vendor). The generated parameters are transferred to the CNC via Ethernet.

Benefits

- Simplified management of PROFINET network settings
- Increase of the efficiency in managing multiple machine settings and large networking projects

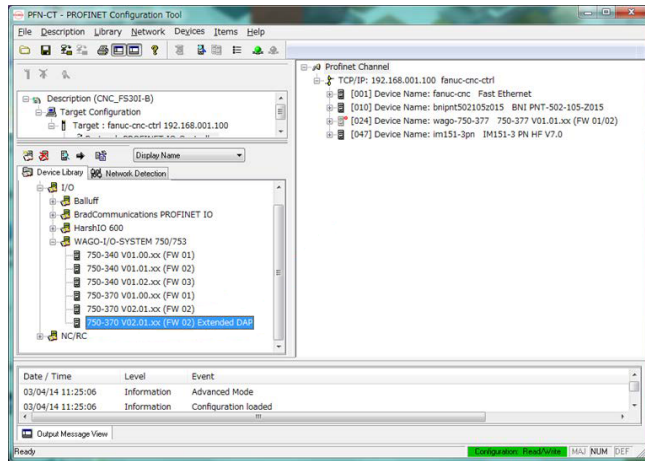


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

740

PC Software

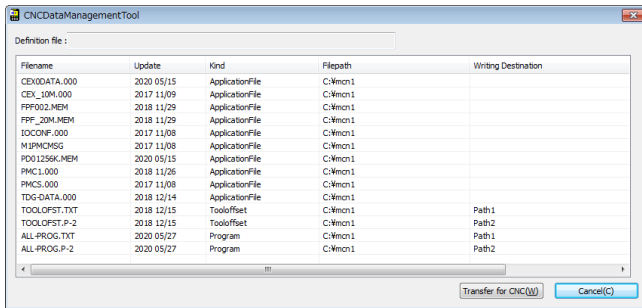

The screenshot shows the 'CNCDataManagementTool' window with a 'Definition file' section. It contains a table with columns for Filename, Update, Kind, Filepath, and Writing Destination. The table lists various files such as CD/DATA.000, CD/10M.000, FPF002.MEM, FPF_20M.MEM, IOCONF.000, MPMCHRS, PDI1256C.MEM, PMCL.000, PMCS.000, TDG-DATA.000, TOOLOFFST.TXT, TOOLOFFST.P-2, ALL-PROG.TXT, and ALL-PROG.P-2.

| Filename | Update | Kind | Filepath | Writing Destination |
|---------------|------------|-----------------|-----------|---------------------|
| CD/DATA.000 | 2020 05/15 | ApplicationFile | C:\Winon1 | |
| CD/10M.000 | 2017 11/09 | ApplicationFile | C:\Winon1 | |
| FPF002.MEM | 2018 11/29 | ApplicationFile | C:\Winon1 | |
| FPF_20M.MEM | 2018 11/29 | ApplicationFile | C:\Winon1 | |
| IOCONF.000 | 2017 11/08 | ApplicationFile | C:\Winon1 | |
| MPMCHRS | 2017 11/08 | ApplicationFile | C:\Winon1 | |
| PDI1256C.MEM | 2020 05/15 | ApplicationFile | C:\Winon1 | |
| PMCL.000 | 2018 11/26 | ApplicationFile | C:\Winon1 | |
| PMCS.000 | 2017 11/08 | ApplicationFile | C:\Winon1 | |
| TDG-DATA.000 | 2018 12/14 | ApplicationFile | C:\Winon1 | |
| TOOLOFFST.TXT | 2018 12/15 | Tooloffset | C:\Winon1 | Path1 |
| TOOLOFFST.P-2 | 2018 12/15 | Tooloffset | C:\Winon1 | Path2 |
| ALL-PROG.TXT | 2020 05/27 | Program | C:\Winon1 | Path1 |
| ALL-PROG.P-2 | 2020 05/27 | Program | C:\Winon1 | Path2 |

CNC Data Management Tool

Features

CNC Data Management Tool is a PC software that manages machine data and writes it to the CNC. The data that can be written comprises all kinds of data such as application data (e.g. PMC ladder or FANUC PICTURE files), programs, parameter files, tool data, or compensation data. The data is written to the CNC via an Ethernet connection between PC and CNC.

CNC Data Management Tool supports FS0i-D, FS0i-F/F Plus, FS30i/31i/32i-A/B/B Plus, FS35i-B, and Power Motion i-A.

Benefits

- Simplify commissioning of machine tools

Ordering Information

| Specification | Description |
|---------------------|---------------------------------|
| A08B-9010-J814#ZZ11 | CNC Data Management Tool (CD-R) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

741

PC Software

Acceptance Test Assist Tool

Features

The Acceptance Test Assist Tool is a Windows® application running on a Personal Computer which can assist the machine builder during the acceptance test procedure of Dual Check Safety through automated tests and report generation. This application provides the following two functions:

- Execution of the acceptance tests connected to the CNC
- Generation of test reports for the test result to create the final test certificate


The application provides a set of templates to enter the required data and generates a report which can be then further enhanced with Microsoft® Word (.docx format).

The Acceptance Test Assist Tool is part of the CNC Application Development Kit.


Benefits

- Decrease of the time required to proceed the Dual Check Safety acceptance test
- Automated generation of key report data to save time on the redaction of the final acceptance test documents

Test running screen

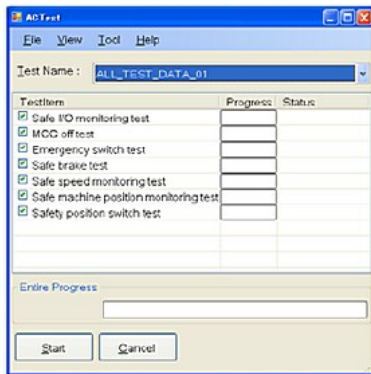

Report making screen

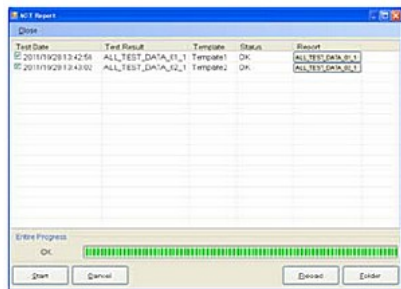

Report



Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

742

PC Software

FANUC SERVO GUIDE

Features

FANUC SERVO GUIDE is a Windows® application that allows a quick and easy optimization of servos and spindles axes.

This software provides the integrated environment to test programs, set parameters and data measurement, needed for servo and spindle tuning.

Direct connection is possible between the Personal Computer and CNC through Ethernet.

Key functions

- Easy connection to the CNC
- Integrated working environment for tuning machine servo and spindles
- Integrated and optimized environment for creating, tuning and optimizing programs, measuring data and changing parameters
- Measurement of servo and spindle data as well as external triggering events from the PMCat once
- many automatic adjustment functions

3-D View function

With this function, it is possible to view the result X, Y and Z coordinate data of the 3-D graph captured by SERVO GUIDE. 3-D graph and time-based waveform are displayed in the same window, and a point on 3-D graph easily corresponds to the point on time axis.

For example, it is possible to display tool path of machining center by capturing position data of X, Y and Z axis. By selecting points on the tool path, you can check waveforms of each servo axis, which corresponds to the selected area. 5-axis machining is also supported. Position of 5 axes are converted to tool center point, and 3-D path of tool is visualized. In addition, axis configuration including Cs axis(spindle axis) is also supported.

Benefits


Effective and easy-to-use PC tool for:

- Setup support for servo and spindle functions
- Optimization of servo and spindle control
- Display of path error for troubleshooting machining quality issues
- Finding potential to reduce machining cycle time
- Troubleshooting of servo and spindle related alarms

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

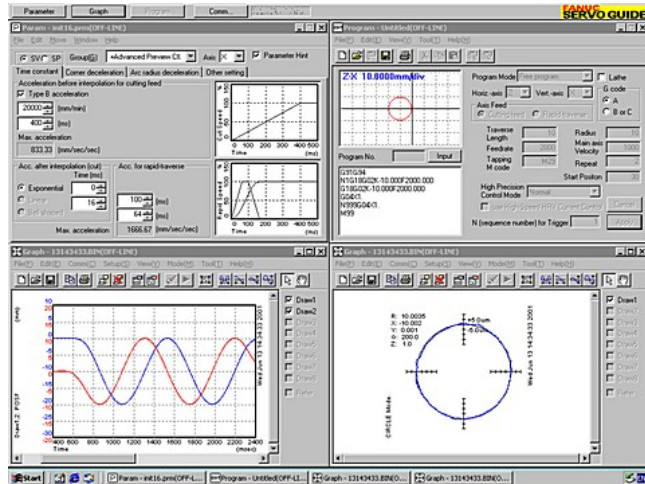

Ordering Information

| Specification | Description |
|---------------------|----------------------------------------------------------------------------------------------------------------------|
| A08B-9010-J522#ZZ11 | FANUC SERVO GUIDE MATE Display |
| A08B-9010-J900 | FANUC SERVO GUIDE Servo Tuning Tool - 1 User |
| A08B-9010-J902 | FANUC SERVO GUIDE Servo Tuning Tool - Graph Edition (Wave Form Measurement) |
| A08B-9010-J904 | FANUC SERVO GUIDE Servo Tuning Tool - 3-D View Function (Also Contains Upgrade for FANUC SERVO GUIDE A08B-9010-J900) |
| A08B-9010-J910 | FANUC SERVO GUIDE Servo Tuning Tool - 10 Users |
| A08B-9010-J919 | FANUC SERVO GUIDE Servo Tuning Tool - Upgrade |
| A08B-9010-J920 | FANUC SERVO GUIDE Servo Tuning Tool - 20 Users |
| A08B-9010-J930 | FANUC SERVO GUIDE Servo Tuning Tool - Site License |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

744

PC Software

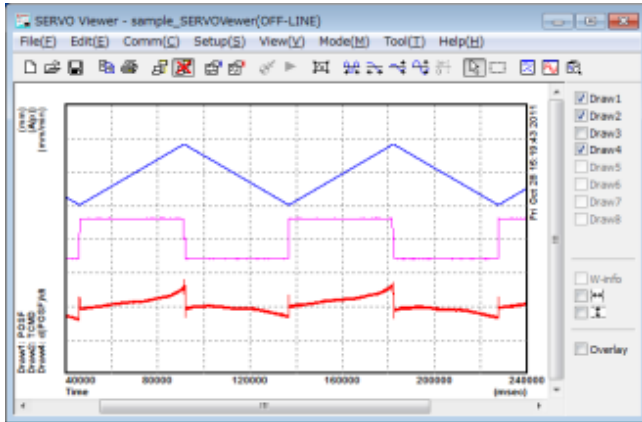

SERVO Viewer

Features

SERVO Viewer is a Windows® application software that enables to measure and display various kinds of data from a machine tool with a FANUC CNC. It is possible to acquire and view servo/spindle data such as position, speed and torque, PMC signals, or CNC status information such as program number, sequence number or M/S/T codes.

Benefits

- Analyze the axis movement and CNC operation timing
- Optimize the CNC program to reduce cycle times
- Monitor the machine's condition by periodical measurements

Ordering Information

| Specification | Description |
|----------------|-----------------------|
| A08B-9010-J940 | Servo Viewer |
| A08B-9010-J949 | Servo Viewer (Update) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

745

PC Software

SERVO SIZER

Features


SERVO SIZER lets you easily select the right motors and amplifiers for your application. Simply input machine specifications and operating conditions and let SERVO SIZER choose the right motor and amplifier for you. SERVO SIZER supports standard servo and spindle motors as well as linear and torque motors and build-in spindle motors.

Benefits

- Select the optimal motors and amplifiers for your application easily

Ordering Information

| Specification | Description |
|----------------|-------------|
| A08B-9010-J950 | Servo Sizer |

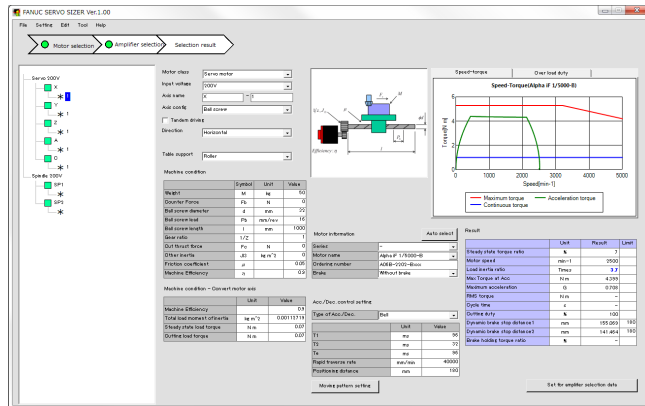


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

746

PC Software

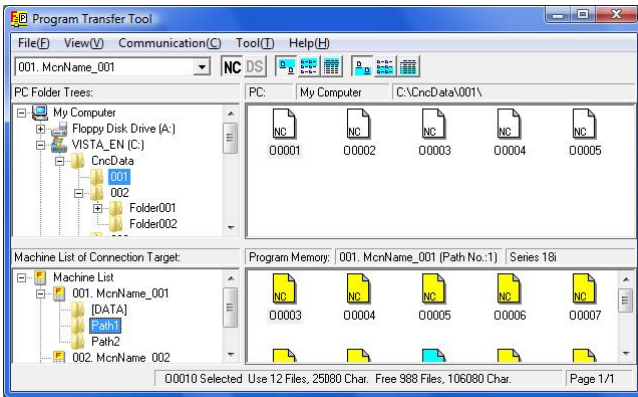

Program Transfer Tool

Features

The Program Transfer Tool is a Windows® application to manage part programs, tool offsets, custom Macro value, workpiece origin offset and tool management data. The data can easily transferred by Ethernet between the CNC memory or data server and a PC. The software allows the operator to delete and rename files/folders or create folders in the CNC or the PC.

Benefits

- Efficient administration
- Easy and faster managing of programs
- Store and organize backups of CNC data

Ordering Information

| Specification | Description |
|----------------|----------------------------------------------------|
| A08B-9510-J515 | Program Transfer Tool (via Ethernet), Site License |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

747

PC Software

Active G-Code Checker

Features


Active G-Code Checker is a PC software that displays a machine's available G-codes, specification and axis configuration based on the CNC's parameter, system configuration and CNC ID information. The software facilitates the development of post processors for specific machines.

Benefits

- Create post processors that utilize all available functions of a machine

Ordering Information

| Specification | Description |
|---------------------|-------------------------------------------------------------|
| A08B-9010-J811#ZZ11 | Active G-Code Checker (CD-R) - for CNC Series 30i/31i/32i-B |

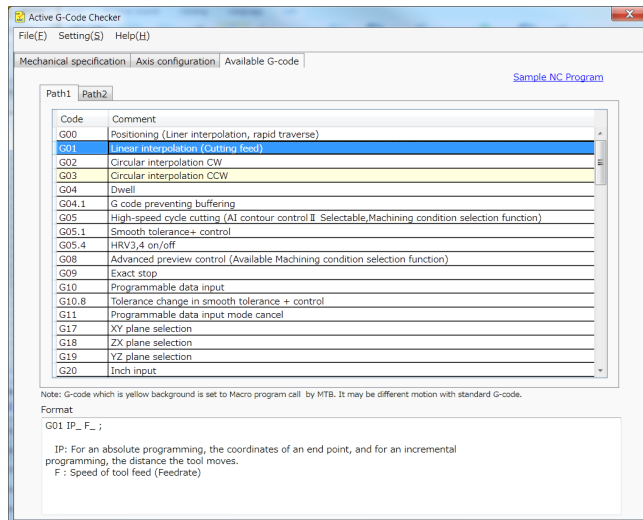

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

748

PC Software

Interactive Programming

Features

The "Grinding Function A" package contains the following items:

- Multi-Step Skip
- Canned Cycle for Grinding
- Continuous Dressing (0i-MF only)
- Infeed Control (0i-MF only)

The "Grinding Function B" package contains

- the same functions as "Grinding Function A", and
- Arbitrary Angular Axis Control function.

Note: for more information about the functions included in the packages, refer to their respective descriptions in this catalogue.

Benefits

- Simplification of the selection of the control functions required for popular grinding machine

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

749

Interactive Programming

iCAP T for PC

Features

iCAP T for PC is a conversational programming software for lathes. It is a standalone software which allows you to create NC programs by just inputting blanks and part shapes and by selecting machining processes.

Generally, creating part programs requires programming knowledge of G and M codes. With iCAP T, part programs can be created automatically without any programming knowledge.

It is possible to create part programs for X-Z axes (turning) and C-Y axes (milling). Two-spindle machining is also supported. CAD data can be read in by the function. The 2-Path function allows to create part programs for controlling a second path. Milling machining with Tilted Working Plane by B axis is supported by the B-Axis function.

iCAP T for PC is a standalone software which has almost the same functionality as the iCAP T option for iHMI. With the PC software, it is possible to create part programs without blocking a machine for programming.

Benefits

- Create part programs for complex lathes easily without any programming knowledge
- Reduce the time from drawing to cutting
- Reduce downtime due to programming

Ordering Information

| Specification | Description |
|---------------------|--------------------------------------------------------------------------------------------------------------------------|
| A08B-9310-J900#ZZ12 | Interactive Programming Function for Complex Lathe (for PC) - FS 3xi-A/B, 0i-TF, 0i-TD (Upgrade for A08B-9310-J900#ZZ12) |
| A08B-9310-J910#ZZ12 | iCAP T for PC |
| A08B-9310-J911#ZZ12 | iCAP T Trial Version 1.9 |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

750

PC Software

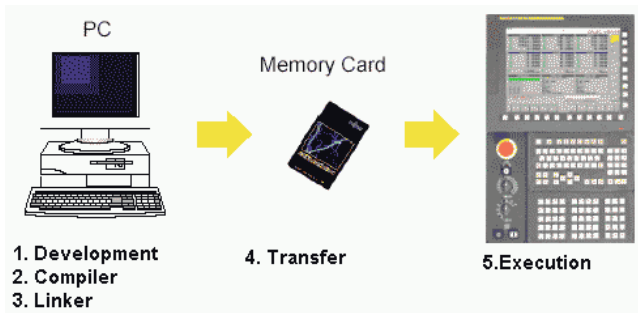

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

C-Language Library for C-Language Executor

Features

FANUC CNC provides a powerful set of tools to allow custom software developed in C to access the CNC functions.

Using the C-Language Executor functionality it is possible to develop customized CNC screens and powerful Human Machine Interfaces (HMI). It is also possible to add new functionality to the CNC, as well as machine control functions written in C.

The C-Language Library for C-Language Executor is a software library that allows custom software to access the CNC functions and be executed by the C-Language Executor functionality.

The C-Language Executor Library is for the conversion of FS16i/18i/21i-B PMC C-language board applications to C-Language Executor applications. The C-Language Library for C-Language Executor is required.

The C-Language Library for C-Language Executor is part of the CNC Application Development Kit.

Benefits


- Creation of customized functions and programs using C-Language
- Modification of Macro Programs to follow machine and production evolution
- Powerful programming language for machining or machine management purpose

Ordering Information

| Specification | Description |
|---------------------|-----------------------------|
| A08B-9210-J719#ZZ11 | C-Language Executor Library |

751

PC Software

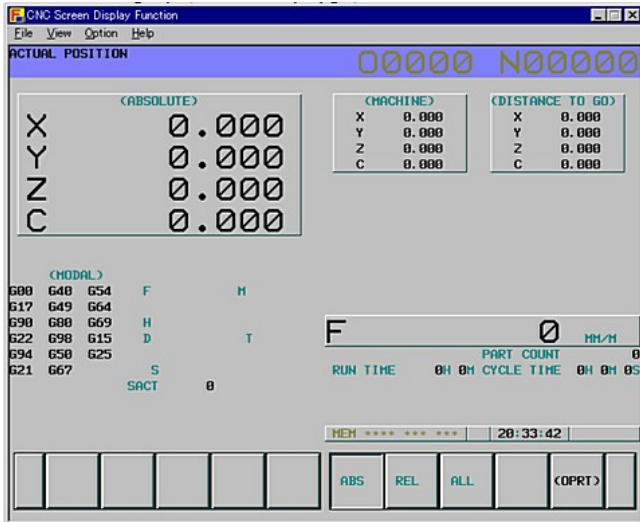

CNC Screen Display Function (SDF)

Features

The CNC Screen Display Function (SDF) Windows® application provides a straight-forward tool to display the CNC screens on PC. The CNC can be connected to the PC running the SDF application via Ethernet or HSSB.

Because of the special structure of the SDF application, it is not necessary to update SDF if some new functions are added to the CNC. This makes SDF the best tool for CNC maintenance and setup on Open CNC systems.

This function is a basic function in FANUC Series 30i-B Plus.

The CNC Screen Display function installation files are also part of the CNC Application Development Kit.

Benefits

- Simplified access to the CNC screen from a Personal Computer
- Simple and efficient remote maintenance tool

Ordering Information

| Specification | Description |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0207-J858 | CNC Screen Display Function - Specify "Extended Drivers and Libraries" for HSSB Connection, or Specify "Ethernet Function" for Fast Ethernet Connection |
| A02B-0207-J896 | 30i/31i/32i-B Windows Embedded Compact 7 - CNC Screen Display Function |
| A02B-0207-K775 | CNC Screen Display Function Disk (HSSB) - Specify for Each PANEL i / PC when Using SDF via HSSB |
| A02B-0207-K776 | CNC Screen Display Function Disk (FOCAS2 / Ethernet) - Specify for Each PANEL i / PC when Using SDF via Ethernet |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

752

PC Software

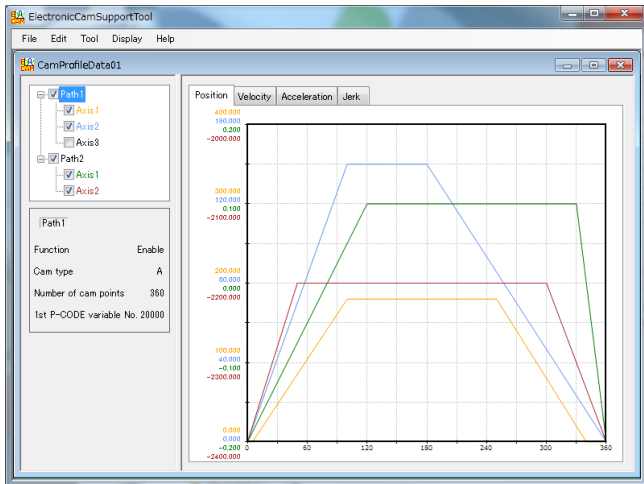

Electronic Cam Support Tool

Features

The cam shape data for the electronic cam function can be created easily with the electronic cam support tool. The cam shape data is defined by setting the stroke position and the curve shape for each phase. It is possible to confirm the position, velocity, acceleration and jerk of the cam shape data visually by a graphical display. The cam shape data is output to a file, which has to be read in by the CNC via memory card.

The Electronic Cam Support Tool is part of the CNC Application Development Kit.

Benefits

- Simplifies the creation of cam shape data for the electronic cam function

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

753

PC Software

FANUC

FOCAS2 Library

CNC/PMC Data window library

FOCAS Library

Features

FOCAS2 (FANUC Open CNC API Specification) is the protocol used to be able to interact with the FANUC CNC from an external Personal Computer (PC).

The FOCAS2 library provides all required functions to be able to develop Windows® applications which can communicate with a FANUC CNC via either Ethernet or HSSB (fiber optics).

Key functions

- Reading/writing data related to controlled axes/spindle
- Operations related to CNC program
- Reading/writing CNC file data
- Reading/writing tool life management data
- Reading history data
- Reading servo/spindle data
- Reading/writing data related to Data Server, DNC1, DNC2, OSI-Ethernet (HSSB version only)
- Reading/writing waveform diagnosis data
- Reading/writing data related to PUNCH PRESS CNC
- Reading/writing data related to LASER CNC
- Reading/writing data related to servo learning data (HSSB version only)
- Reading/writing of other data (diagnostic data, alarm information, operator messages, etc.)
- Reading/writing data related to PMC
- Reading/writing data related to PROFIBUS-DP

Benefits

- Creation of customized functions and applications under Windows®
- Modification of Macro Programs to follow machine and production evolution
- Easy access to many resources of the FANUC CNC to create advanced applications

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------|
| A02B-0207-K737 | FOCAS 1/2 Library Disk |
| A02B-0207-K747 | FOCAS 2 / Ethernet Library Disk for Linux |
| A02B-0207-K748 | FOCAS 1/2 LIBRARY |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

754

PC Software

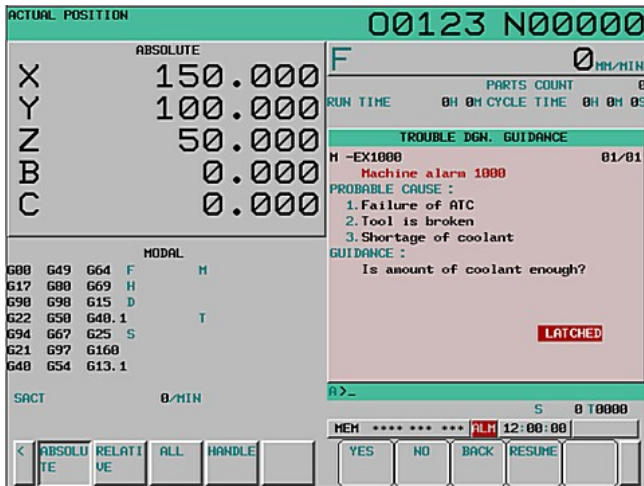

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Guidance Table for Machine Alarm Diagnosis

Features

The machine alarms (external alarm messages, external operator messages and macro alarms) can be diagnosed on the "trouble diagnosis guidance screen" in addition to standard CNC alarms.

In addition to the alarm, the CNC will propose a list of possible causes of the problem and propose a guidance. The guidance can be answered with YES / NO, and depending on the answers, other hints and guidance will appear.

The Guidance Table for Machine Alarm Diagnosis is a Windows® application for the Personal Computer that provides a set of tool to create the guidance parts and the structure of the questions / answers that will guide the operator. Once this data has been created, it can be transferred to the CNC with the tool.


The Guidance Table for Machine Alarm Diagnosis application is part of the CNC Application Development Kit.

Benefits

- Creation of a powerful guidance system to diagnose the machine
- The diagnosis Q and A / guidance application is directly integrated in the CNC and does not require any additional hardware
- Decrease of the time required to diagnose problems at the operator level
- General increase of the productivity of the machine

755

PC Software

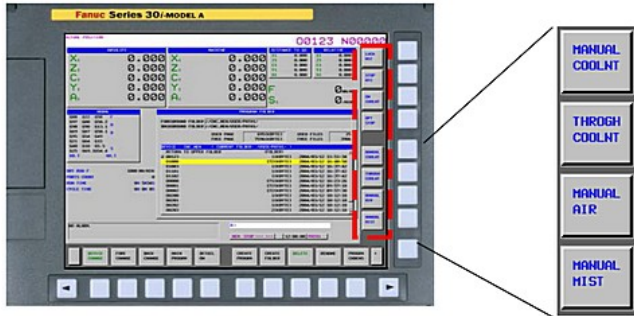

Machine Operation Menu Making Tool

Features

The softkey displayed on the CNC screen can be also used as keys for the operation of the machine. The machine operation such as turning on or off the coolant, that is usually done with the machine operator's panel, can be done with a softkey on the CNC screen instead.

Using this function, it is not required to add additional hardware to add additional operation function to the CNC; it is realized with software.

The hierarchy of the menus, the operation and the displayed text strings can be easily set with the "Machine Operation Menu Making Tool" on the Personal Computer.

The Machine Operation Menu Making Tool is part of the CNC Application Development Kit.

Benefits

- Simple customization of the CNC softkeys
- Realization of simple machine control menus


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

756

PC Software

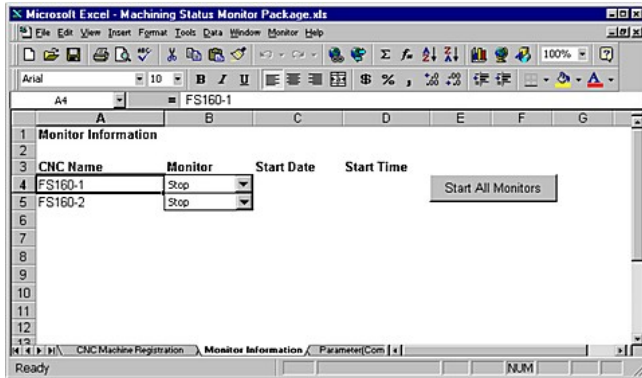

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Machining Status Monitor Package Disk

Features

The Machining Status Monitor Package provides a simple connection capability between the CNC and Microsoft® Excel.

Key functions

- The machining status monitor package outputs the logging data in the form of Microsoft Excel. All the functions of Excel can be used (spreadsheet functions or charts).
- The running results of the program and the number of processed parts can be monitored and output as the logging data.
- The data acquired from the CNC machine and the logging data output can be customized
- Maximum number of CNC machines that can be monitored: up to 8 machines (HSSB) or 32 machines (Ethernet)

The Machining Status Monitor Package installation files are part of the CNC Application Development Kit.

Benefits

- Realisation of simple data logging and monitoring application
- Increase of the efficiency (Machine Tool Efficiency)

Ordering Information

| Specification | Description |
|----------------|-----------------------------------------|
| A02B-0207-J870 | Machine Status Monitor Package Function |

757

PC Software

Main Menu Screen Customization Tool

Features


The Main Menu Screen Customization Tool can customize the main menu screen of a CNC by personal computer. This software can perform the following customization:

- Edit of multi language title of categories
- Moving, addition, deletion of an icon
- Edit of multi language title of icons
- Edit of image of icons

The Main Menu Screen Customization Tool is part of the CNC Application Development Kit.

Benefits

- Easy customization on PC
- To use customization by this software on CNC a option is required.

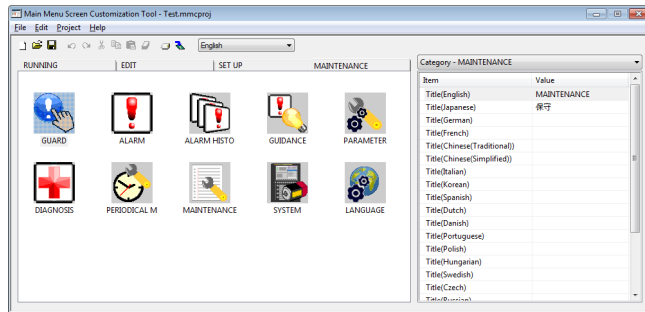

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

758

PC Software

Operation History Converter Tool

Features

If the operation history save function is active in a CNC, older operation history data is saved to a Compact Flash card as a binary file. The operation history converter tool is a Windows® application which converts this binary file into a human-readable text file.

The Operation History Converter Tool is part of the CNC Application Development Kit.

Benefits

- Facilitates long-term operation data analysis


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

759

PC Software

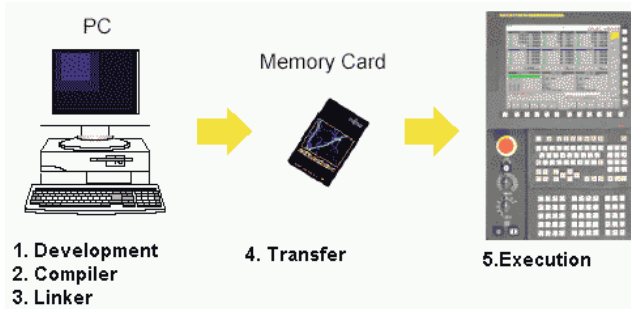

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MACRO Compiler

Features

Some NC programs such as technology functions or programs created using custom macros do not need to be modified once created. Other NC programs, such as machining programs, evolve during machining.

The Macro Executor function can convert a Custom Macro program created by the machine tool builder to an executable macro program, load the executable macro program (P-CODE macro) into F-ROM (CNC Flash Memory), and execute it.

The function which converts a Custom Macro program to an Executable Macro program is called the Macro Compiler. The function which reads and executes a P-CODE macro is called the Macro Executor.

Key functions

- High execution speed of the code, since a custom macro program is loaded after conversion and compilation to an executable so that the machining time can be reduced and the machining precision can be improved.
- Custom Macro used in Technology Modules cannot be destroyed because they are loaded into the FROM (CNC Flash Memory)
- A program converted to execution format is not displayed on the program screen, so that the know-how and the technology can be protected
- An execution format macro program is registered in the F-ROM, so that the program storage space can be efficiently used
- The user can call the execution format macro program with an easy call procedure without being conscious of the complexity of the program itself
- Custom screens can be created using the graphic display functions
- Extension of the CNC control function set (machining functions, interactive screens, RS232 (reader/puncher) interface control, PMC data read/write , etc.)

Benefits

- Creation of customized functions and programs
- Modification of Macro Programs to follow machine and production evolution
- Powerful programming language for machining or machine management purpose

Ordering Information

| Specification | Description |
|---------------------|----------------------------------------------------------------------|
| A08B-9010-J604#EN11 | Macro Compiler, CNC Series 30i/31i/32i, 0i-D/0i-Mate-D |
| A08B-9010-J605#EN11 | Macro Compiler Upgrade, CNC Series 30i/31i/32i, 0i-D/0i-Mate-D, 0i-F |

760

PC Software

FANUC Auto HMI/T and Auto HMI-NC

Features

FANUC Auto HMI-NC is an application composed of a set of HMI templates, objects, tables and scripts to create standardized user interfaces in automotive applications or machining applications producing large batches of products.

Refer to the "FANUC Auto HMI-NC" section of this catalogue for further information about this application.


The disk contains the template files for various configurations and screen sizes, variable maps as well as documentation.

Benefits

- Powerfull ready-made application templates and variable tables
- Customizable through FANUC PICTURE

Ordering Information

| Specification | Description |
|---------------------|---------------------------------------------------------------------------|
| A08B-9010-J519#ZZ11 | FANUC Auto HMI-NC, CD-ROM - Development of Machine Operation Screens |
| A08B-9010-J524#ZZ11 | FANUC Auto HMI/T, CD-ROM - Development of Machine Operation Panel Screens |
| A08B-9510-J931 | FANUC Auto HMI PC Application for Proficy Machine Edition - Standard |

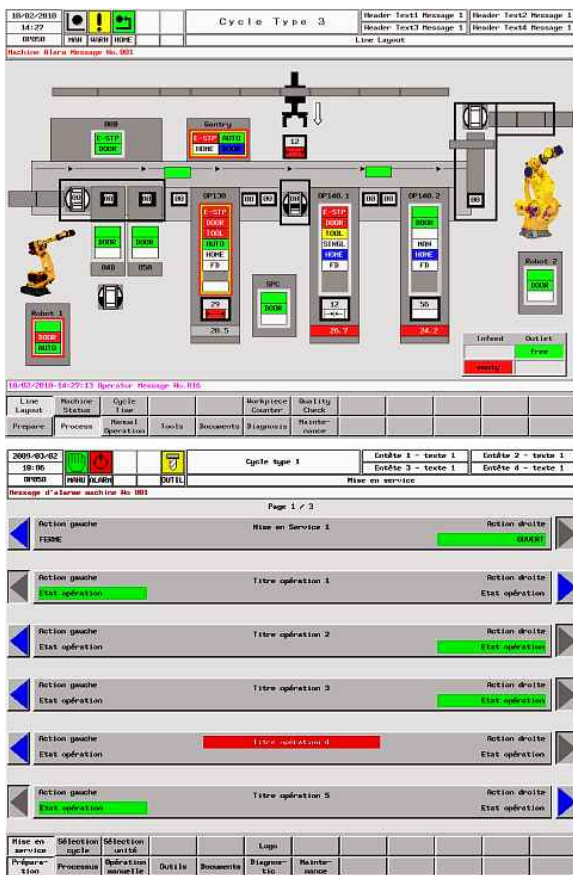

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

761

PC Software

3D Error Compensation Setting Tool

Features

Every machine tool is afflicted with some kind of geometric errors. These errors affect the machine's precision and hence the quality of the machined parts. They can be compensated according to position in 3-dimensional space by using one of the following functions:

- 3-Dimensional Error Compensation
- 3-Dimensional Rotary Error Compensation


This Windows® software converts measured errors as defined in ISO 230-1 into 3-dimensional error compensation data. The compensation data can be transferred to a CNC directly via HSSB or Ethernet, or it can be stored into a compensation data file and transferred to a CNC by e.g. a CF card.

Benefits

- Simplify the creation of compensation data for 3-Dimensional Error Compensation and 3-Dimensional Rotary Error Compensation

Ordering Information

| Specification | Description |
|---------------------|-------------------------------------|
| A08B-9010-J727#ZZ11 | 3-D Error Compensation Setting Tool |

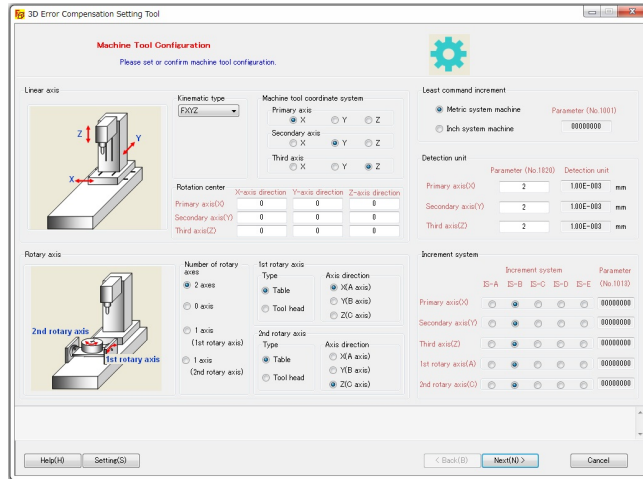


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

762

PC Software

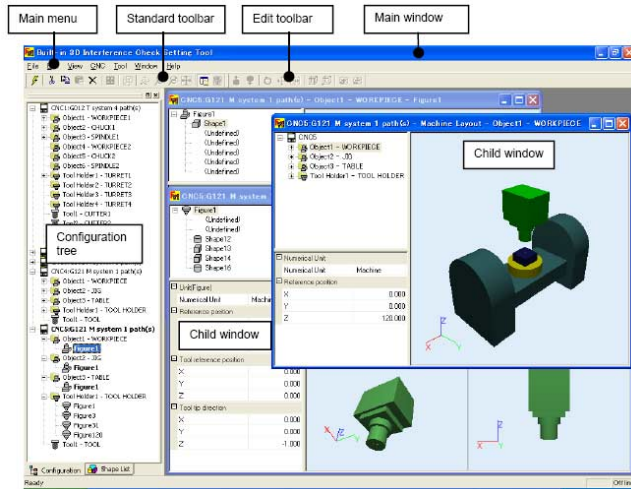

Built-In 3D Interference Check Setting Tool

Features

The Built-in 3D Interference Check Setting Tool is a Windows® application that allows the setting of the Series 30i/31i Built-In 3D Interference Check functions through a Personal Computer

Key functions

- Creation, setting and display of the 3D objects and figures representing the work piece, the fixtures and the tools
- Object moving and axis settings
- Real-time 3D interference check monitoring
- Setting of the NC parameters 10931 to 10958 related to the Built-In 3D Interference Check Function

Benefits

- Simplified management of the 3D Interference Check Project
- Import of 3D shapes to accelerate the setup
- Increase of the efficiency in managing multiple machine settings and large projects
- Simplified startup through online functions

Ordering Information

| Specification | Description |
|---------------------|----------------------------------------------|
| A08B-9010-J726#ZZ11 | Built-in 3-D Interference Check Setting Tool |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

763

PC Software

FANUC Connect

Features


FANUC Connect is a Windows® application software that makes it easy to access and backup various kinds of CNC data from FANUC CNCs through an Ethernet network. FANUC Connect has the functionality of an FTP server, it can be accessed from any software that has an FTP client function. The communication between the FANUC Connect server and the CNC is done via FOCAS/Ethernet. With the automatic backup function, it is possible to backup CNC data automatically according to a specified schedule.

Benefits

- Simplify and automate the backup of CNC data
- Clients can connect to a CNC without the need of a FOCAS library

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A08B-9510-J525 | FANUC Connect |
| A08B-9510-J526 | FANUC Connect (Update) |

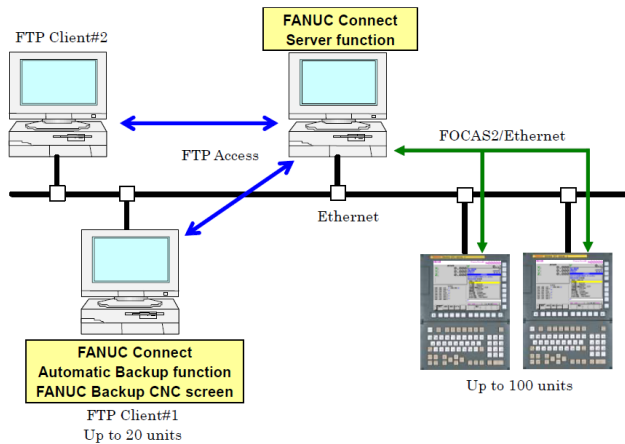

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

764

PC Software

FANUC Customize Assist

Features


The FANUC Customize Assist tool simplifies the management of software development for a given machine or project. It provides a launcher for the different customization tools provided by FANUC and also a management capabilities for the different files and programming resources.

Benefits

- Simplification of the management of complex projects
- All tools required are easily accessible from a launcher
- Ease of the files, data and resources management

Ordering Information

| Specification | Description |
|---------------------|---------------------------------------------------|
| A08B-9010-J550#ZZ11 | FANUC Customize Assist - CNC Series 30i/31i/32i-A |

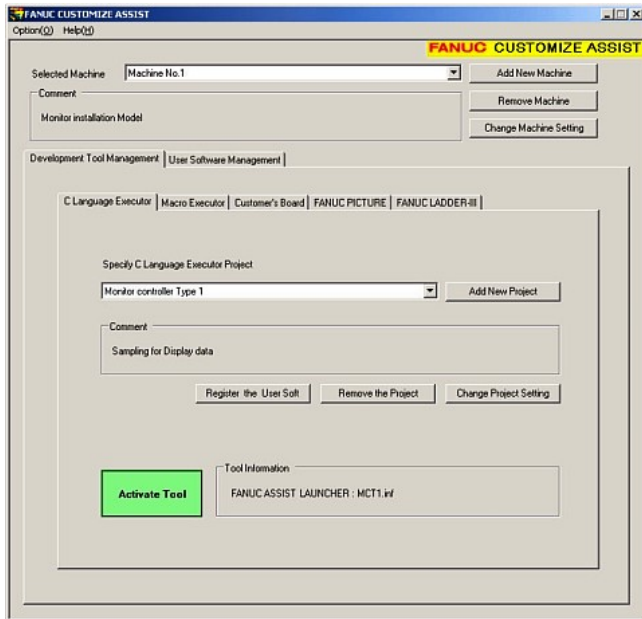


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

765

PC Software

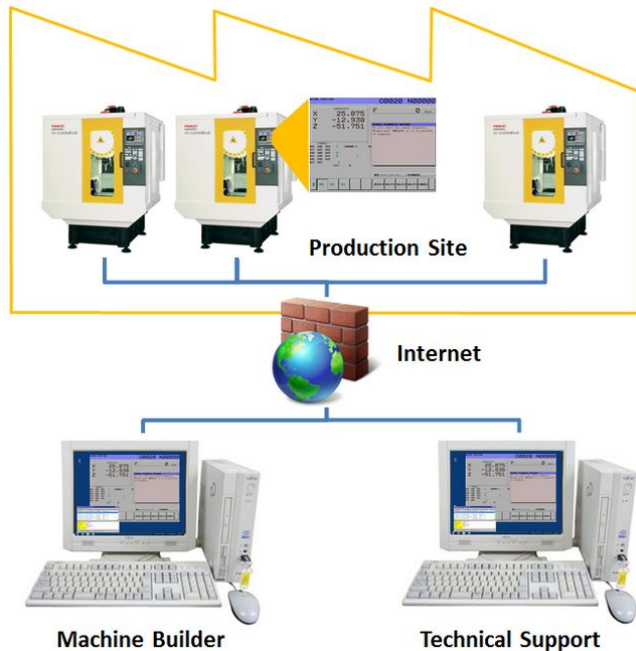

Machine Remote Diagnosis Package

Features

The Machine Remote Diagnosis Package application is a tool designed for the machine tool builder to provide remote support of machines easily. This software is designed to use Internet technology to investigate the internal states of remote CNCs and PMCs.

Key functions

- Communication with a CNC machine tool of an end user over the Internet (or a LAN) to investigate the internal state of the CNC
- Elimination of the need to travel to the machine installation site to check problems; increasing service efficiency
- Server functions to enable quick reception and processing
- Enhanced CNC/PMC operation functions to diagnose problems remotely (sequence program, NC program, and NC parameter corrections can be made for recovery)

The screenshot shows the 'FANUC RemoteDiagnosticClient - PMC' application window. It features a menu bar (File, View, Option, Help) and a main table with columns: Date/time, Machine ID, Customer name, Status, Receipt n..., and Comment. Below the table is a detailed view for a selected machine entry.

| Date/time | Machine ID | Customer name | Status | Receipt n... | Comment |
|------------------------|--------------|---------------|---------|--------------|---------|
| 28/May/2001 7:59:23 PM | 200106LS1234 | A Industry | Request | 26 | |
| 28/May/2001 7:45:47 PM | 200106LS1234 | A Industry | End | 25 | |
| 28/May/2001 6:32:08 PM | 200106LS1234 | A Industry | Aborted | 24 | |
| 17/Apr/2001 2:10:38 PM | MT4444 | B Machinery | Aborted | 23 | |
| 17/Apr/2001 2:09:40 PM | 200106LS1234 | A Industry | Aborted | 22 | |
| 17/Apr/2001 9:49:34 AM | 200106LS1234 | A Industry | End | 21 | Ord... |
| 17/Apr/2001 9:49:05 AM | MT1234 | B Machinery | Aborted | 20 | |

| | |
|------------------|--------------|
| Machine ID | 200106LS1234 |
| Machine name | FS16iTB |
| Customer | A Industry |
| Phone | 0555-84-yyyy |
| Person in charge | Suzuki |
| Note | |

Buttons at the bottom: Customer information, Diagnostic history, Diagnose

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

766

Benefits

- Direct connection between the machine and machine builder through remote operation
- Improvement of the efficiency of the machine service
- Decrease of the ownership costs

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A02B-0207-J854 | CNC Screen Display Function for Machine Remote Diagnosis Package (Fast Ethernet Required) |
| A08B-9210-J515 | Machine Remote Diagnosis Package (CD-ROM) |
| A08B-9210-J516 | Machine Remote Diagnosis Package (Update for A08B-9210-J515) - Requires a Valid Serial Number Contained in Machine Remote Diagnosis Package (A08B-9210-J515) |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

767

PC Software

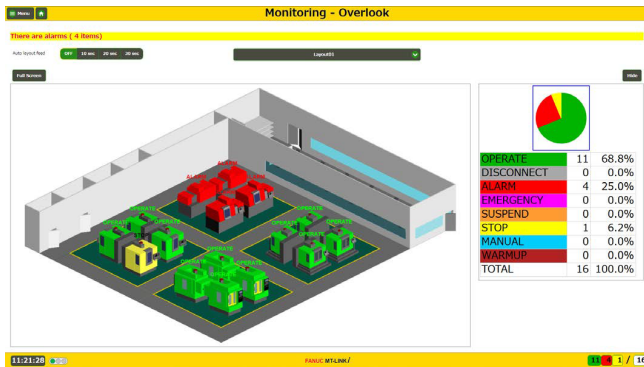

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

MT-LINKi - CNC Data Collection Software for PC

Features

MT-LINKi is a suite of operation management software running on personal computers. The suite enables you to monitor multiple equipment units such as CNCs, Robots and PLCs, and to collect and visualize their operational data and production results easily, supporting you to manage your factory efficiently.

MT-LINKi enables you to monitor the state of the whole factory at a glance in real-time. Recognize abnormal states of the equipment quickly, allowing you to start countermeasures immediately.

MT-LINKi allows you to review the operational results on machine level and machine group level. You can review the production results and compare them against the production plan. You also can check machine utilization and find machines that are under-utilized. This enables you to optimize the factory's resource planning.

With MT-LINKi, it is possible to view various diagnostic data such as alarm history, program history, signal history and macro value history. With this, you are able to identify bottlenecks and optimize the production process. MT-LINKi also enables you to schedule automatically generated reports in Excel file format. The report templates can be customized to suit your needs.

The File Transfer function allows you to manage CNC data of all machines in factory easily from a central location. The backups can be used for various purposes such as archival or disaster recovery.

Benefits


- Reduce downtime by reacting quickly to abnormal states
- Identify alarm causes quickly, identify and cut off recurrent alarm causes
- Check machine utilization and machine productivity, detect unused production capacity
- Identify deviations from the production plan easily
- Check the condition of batteries, fans and motors' leakage resistances, replace worn-out components in time

Ordering Information

| Specification | Description |
|---------------------|------------------------------------------------------------------------------------------------------|
| A08B-9510-J505#ZZ12 | FANUC MT-LINKi (50 Machines) - Requires Embedded Ethernet or Fast Ethernet (recommended) in the CNC |
| A08B-9510-J506#ZZ12 | FANUC MT-LINKi (100 Machines) - Requires Embedded Ethernet or Fast Ethernet (recommended) in the CNC |
| A08B-9510-J507#ZZ12 | FANUC MT-LINKi (Update) - Requires Embedded Ethernet or Fast Ethernet (recommended) in the CNC |
| A08B-9510-J508#ZZ12 | FANUC MT-LINKi (20 Machines) - Requires Embedded Ethernet or Fast Ethernet (recommended) in the CNC |

768

PC Software

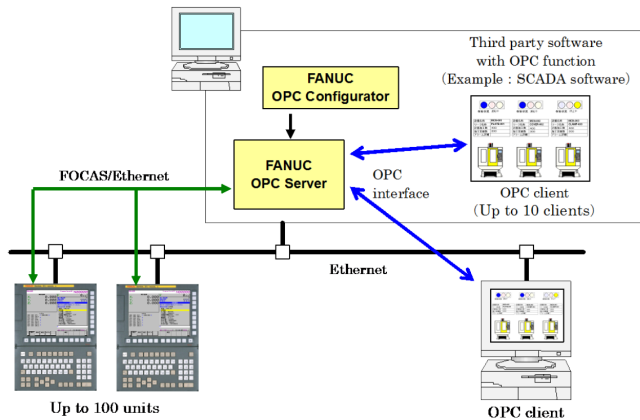

OPC Server

Features

OPC is a communication standard for industrial automation. The FANUC OPC Server is a Windows® application software for PCs that converts the communication protocol between OPC and FOCAS. Devices with an OPC client functionality can communicate with FANUC CNCs via this software.

Benefits

- Connect to a third party application software that has OPC client functionality easily

Ordering Information

| Specification | Description |
|----------------|--------------------------------------------------------------------------------------------------------------------------------|
| A08B-9510-J521 | FANUC OPC Server - CNC Series 30i/31i/32i-A/B, 35i-B, Power Motion i-A, 0i-D/F |
| A08B-9510-J522 | FANUC OPC Server [Update] - CNC Series 30i/31i/32i-A/B, 35i-B, Power Motion i-A, 0i-B/C/D/F, 16i/18i/21i-A/B, Power Mate i-D/H |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

769

PC Software

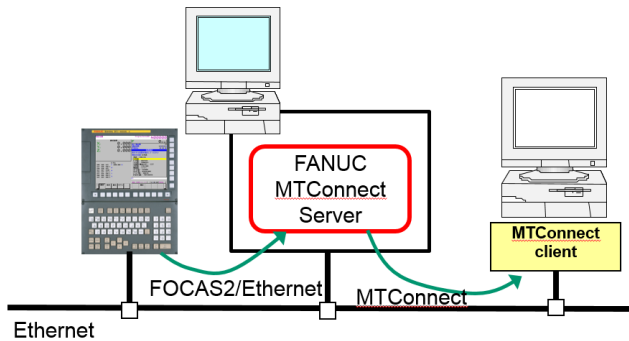

MTConnect Server

Features

MTConnect is a protocol to retrieve data from factory equipment such as machine tools by client applications used for data analysis and monitoring. With FANUC MTConnect Server, you can read data from machine tools equipped with FANUC CNCs. MTConnect Server collects data from CNCs and PMCs and provides them to client applications via MTConnect protocol.

The option "MTConnect Server Function" is required on the CNC in order to use this software.

Benefits

- Read data from FANUC CNCs and PMCs via MTConnect
- Use client applications from the market that require MTConnect

Ordering Information

| Specification | Description |
|----------------|------------------------|
| A08B-9510-J528 | FANUC MTConnect Server |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

770

PC Software

Parameter Conversion Support Tool

Features

The Parameter Conversion Tool provides the possibility to convert parameter files created for legacy systems to actual / new CNC systems automatically.

The tool converts for instance parameter files of the Series 16i CNC to the Series 30i CNC, or from Series 0i-MODEL C to Series 0i-MODEL D.

Benefits

- Simplifies the migration of machines from legacy CNC systems to current CNC systems

Ordering Information

| Specification | Description |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A08B-9010-J709#ZZ11 | Parameter Conversion Assist Tool for FS 0i-D / 0i-Mate-D - PC-Software for Conversion of FS 0i-C / 0i-Mate-C Parameters to FS 0i-D / 0i-Mate-D Parameters, Specify for each PC |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

771

PC Software

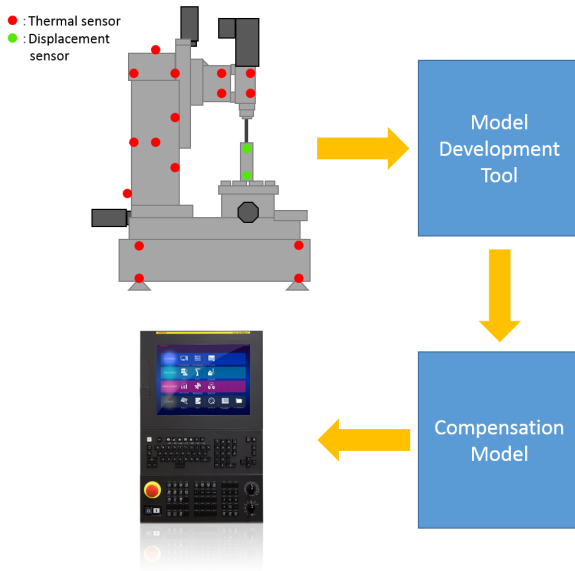

AI Thermal Displacement Compensation Model Development Tool

Features

Temperature changes affect the accuracy of machine tools. It is possible to compensate this effect, but finding the right dependency between temperature and displacement is a difficult task that has to be performed by experts. AI Thermal Displacement Compensation Model Development Tool uses Machine Learning to create a model of the machine's thermal behavior, making it much easier to find that dependency between temperature and displacement. Thus AI Thermal Displacement Compensation Model Development Tool reduces time to market and saves R&D resources. The model's estimations are used to compensate thermal displacement during operation, improving machine accuracy.

Benefits

- Reduce time to market
- Save R&D resources
- Improve machine accuracy

Ordering Information

| Specification | Description |
|---------------------|-------------------------------------------------------------------|
| A08B-9010-J810#ZZ12 | AI Thermal Displacement Compensation Model Development Tool (DVD) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

772

PC Software

CNC Lock Setting Data Preparation Tool

Features

Use the CNC Lock Setting Data Preparation Tool to set up the "CNC Lock function" on CNCs. The CNC Lock function enables you to set password-protected expiration dates. The CNC will not execute automatic operation anymore after the expiration date has passed. You can prepare a message for the end user to inform him about the blocking of the CNC and give further instructions.

The CNC Lock function is intended for leased machines or machines sold on installment plan. It allows to restrict operation of machines if payments are held off by the end user.

Benefits

- Facilitates machine sales on installment plan
- Facilitates machine leasing

Ordering Information

| Specification | Description |
|---------------------|----------------------------------------------|
| A08B-9010-J706#ZZ11 | CNC Lock Setting Data Preparation Tool (DVD) |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

773

PC Software

Windows Embedded SDK

Features

The Windows Embedded Compact SDK is a software development kit for the development of applications on CNCs that are equipped with the "Personal Computer function with Windows CE". The necessary documents and libraries for the development of applications with Visual Studio are included.

Benefits

- Personalize CNCs with customer-specific applications easily

Ordering Information

| Specification | Description |
|---------------------|---------------------------------------------------------------------|
| A08B-9110-J708#ZZ11 | Windows Embedded CE 6.0 - SDK (Software Development Kit), CD-ROM |
| A08B-9110-J709#ZZ11 | Windows Embedded Compact 7 - SDK (Software Development Kit), CD-ROM |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

774

PC Software

PC Tool for Memory Card Program Operation/ Editing

Features

The "Memory Card Program Operation/Editing" function of Series 30i/31i/32i Model A requires a memory card program file on a FAT formatted memory card. This PC tool is used to prepare the memory card program file for this function. The maximum size of the memory card program file is 2048 Mbytes (2 Gbytes).

Key functions


- Browsing the folders of the memory card program file
- Adding a program to the memory card program file
- Extracting a program in the memory card program file as a text file
- Renaming a program in the memory card program file
- Deleting a program in the memory card program file
- Creating a new folder into the memory card program file
- Renaming a folder in the memory card program file
- Deleting a folder in the memory card program file
- Display of free space on the memory card program file
- Sorting list view of the memory card program file

Benefits

- Simplified management of parts programs

Ordering Information

| Specification | Description |
|---------------------|-----------------------------------------------------|
| A08B-9010-J700#ZZ11 | PC Tool for Memory Card Program Editing / Operation |

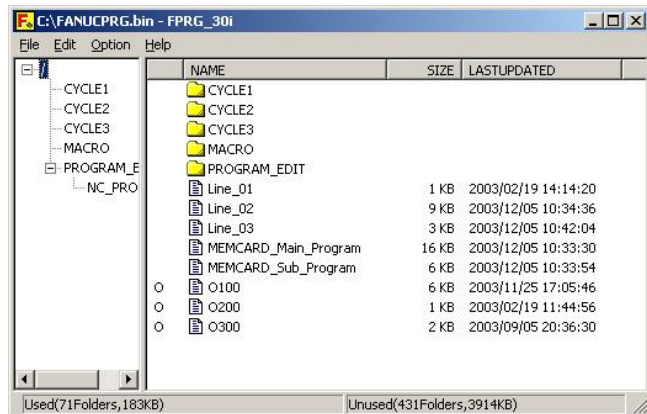

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

775

PC Software

Cycle Time Estimate Function

Features

Cycle Time Estimate is a function that can quickly estimate the execution cycle time of an NC program. It delivers estimations for cutting and rapid traverse times, time spent on the execution of auxiliary codes (e. g. M codes), as well as cutting and rapid traverse travel distances.

The accuracy of the estimation is higher than estimations made with 3rd party software. All estimations are calculated in consideration of the real machine's acceleration and deceleration. It is possible to estimate the machining time of complex programs, for example programs for 5-axis machining.

With the Cycle Time Estimate Library contained in this disk, it is possible to create custom applications that incorporate the Cycle Time Estimate function. In order to use the library, the "Cycle Time Estimate Library function" option has to be effective in the CNC.

Benefits

- Decrease processing time by optimizing programs
- Improve the utilization of machines by enhanced and reliable machine schedule planning

Ordering Information

| Specification | Description |
|---------------------|------------------------------------------------------|
| A08B-9010-J758#ZZ12 | Disk for Cycle Time Estimate Function (for CNC), DVD |


Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

776

PC Software

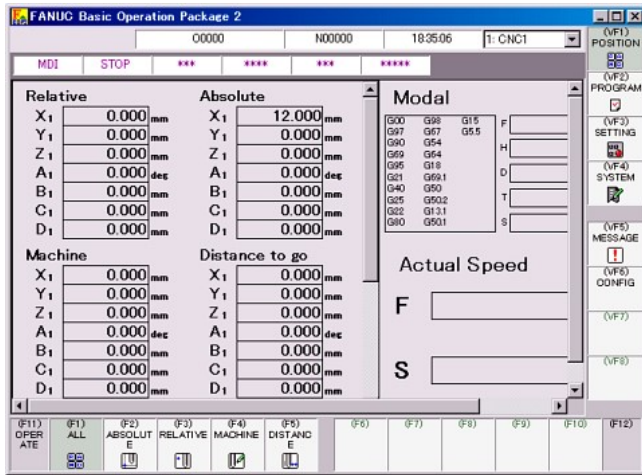

Basic Operation Package 2

Features

The Basic Operation Package 2 is a native Windows® software which allows the CNC operations on a PC.

It offers the same comfort and operability in order that users of FANUC CNC can quickly become familiar with the system. Basic Operation Package 2 can be customized to even increase the operability and efficiency and match the machine requirement. Screens can be added, modified or removed.

The Basic Operation Package 2 is designed to be used with a Personal Computer display connected via HSSB or Ethernet to a FANUC CNC.

Basic Operation Package 2 is based on Microsoft® .NET Framework®. Screens can be created / modified using simple XML configuration. It is available for the Series 30i-MODEL A/B CNC Family and the Series 0i-MODEL D CNC Family. It is also usable on the legacy CNC Series 16-MODEL C and Series 16i-MODEL A/B family.

The Basic Operation Package 2 installation files are also part of the CNC Application Development Kit.

Benefits

- Simplified implementation of the CNC operation for a Personal Computer
- Simple and efficient customization

Ordering Information

| Specification | Description |
|----------------|-------------------------------------------------------------------------------|
| A02B-0207-J816 | Basic Operation Package 2 Function [BOP 2] |
| A02B-0207-K755 | Basic Operation Package 2 - HSSB / Ethernet, CD-ROM - BOP 2 [Enhanced Step 2] |

Notice

Certain functions may require additional hardware, different CPU type or additional memory capacity or may cause compatibility issue with other functions. In case of doubt, contact your FANUC sales representative for additional information and support.

The information given in the FANUC manuals or original manufacturer documentation shall prevail. Technical data is subject to change without prior notice. No part of this document may be reproduced in any form. All rights reserved. © FANUC 2021

Index

2

| | |
|-------------------------------|-----|
| 2nd Auxiliary Function..... | 378 |
| 2nd Feedrate Override..... | 252 |
| 2nd Geometry Tool Offset..... | 429 |

3

| | |
|--------------------------------------------------|-----|
| 3-Dimensional Circular Interpolation..... | 209 |
| 3-Dimensional Coordinate System Conversion..... | 311 |
| 3-Dimensional Cutter Compensation..... | 441 |
| 3-Dimensional Error Compensation..... | 475 |
| 3-Dimensional Machine Position Compensation..... | 478 |
| 3-Dimensional Manual Feed..... | 158 |
| 3-Dimensional Rotary Error Compensation..... | 479 |
| 3-Dimensional Tool Compensation..... | 425 |
| 3D Error Compensation Setting Tool..... | 761 |
| 3D Interference Check with PC Function..... | 119 |
| 3rd/4th Reference Position Return..... | 205 |

4

| | |
|--------------------------|-----|
| 4th/5th Axis Offset..... | 422 |
|--------------------------|-----|

5

| | |
|--------------------------------------------------|-----|
| 5-Axis Kit..... | 665 |
| 5-Axis Machining Condition Setting Function..... | 609 |

A

| | |
|------------------------------------------------------------------|-----|
| AI Contour Control I..... | 262 |
| AI Contour Control II..... | 263 |
| AI Feedforward..... | 135 |
| AI Thermal Displacement Compensation..... | 480 |
| AI Thermal Displacement Compensation Model Development Tool..... | 771 |
| Acceptance Test Assist Tool..... | 741 |
| Accuracy Compensation Functions..... | 462 |

| | |
|-----------------------------------------------------------------------|-----|
| Active Block Cancel..... | 173 |
| Active G-Code Checker..... | 747 |
| Actual Spindle Speed Output..... | 384 |
| Addition of Custom Macro Common Variables..... | 295 |
| Addition of Custom Macro Common Variables 1000..... | 296 |
| Addition of Cutting Condition Data..... | 517 |
| Addition of Loader Control Path..... | 053 |
| Addition of Tool Pairs for Tool Life Management..... | 445 |
| Addition of Workpiece Coordinate System 300 Pairs..... | 286 |
| Addition of Workpiece Coordinate System 48 Pairs..... | 285 |
| Advanced Preview Control..... | 261 |
| Arbitrary Angular Axis Control..... | 066 |
| Arbitrary Command Multiply..... | 090 |
| Arbitrary Position Reference Setting for Cs Axis..... | 396 |
| Arbitrary Speed Threading..... | 407 |
| Attitude Control..... | 531 |
| Automatic Alteration of Tool Position Compensation..... | 448 |
| Automatic Corner Override..... | 308 |
| Automatic Data Backup..... | 628 |
| Automatic Exact Stop Check..... | 543 |
| Automatic Gap Control Axis Retract & Approaching Function..... | 524 |
| Automatic Phase Synchronization for Flexible Synchronous Control..... | 490 |
| Automatic Tool Length Measurement..... | 432 |
| Automatic Tool Nose Radius Compensation..... | 424 |
| Automatic Tool Offset..... | 435 |
| Auxiliary / Spindle Speed Functions..... | 377 |
| Auxiliary Function Output in Moving Axis..... | 379 |
| Auxiliary Function Output in Program Restart..... | 141 |
| Axis Control by PMC..... | 046 |
| Axis Immediate Stop Function..... | 133 |
| Axis Synchronous Control..... | 062 |

| | |
|-------------------------------------------------------------|-----|
| B | |
| Background Editing..... | 557 |
| Balanced Cutting..... | 210 |
| Basic Operation Package 2..... | 776 |
| Basic Option..... | 653 |
| Bell-Shaped Acc./Dec. After Cutting Feed Interpolation..... | 251 |
| Bevel Cutting Compensation Function..... | 534 |
| Bi-Directional Pitch Error Compensation..... | 465 |
| Buffer Expansion..... | 529 |
| Built-In 3D Interference Check..... | 117 |
| Built-In 3D Interference Check Setting Tool..... | 762 |

| | |
|-------------------------------------------------|-----|
| C | |
| C Language Executor Additional SRAM..... | 322 |
| C-Axis Control..... | 497 |
| C-Language Library for C-Language Executor..... | 750 |
| CC-Link..... | 706 |
| CC-Link IE Field..... | 709 |
| CC-Link Remote Device..... | 707 |
| CNC..... | 021 |
| CNC Application Development Kit..... | 724 |
| CNC Data Management Tool..... | 740 |
| CNC GUIDE..... | 725 |
| CNC GUIDE Academic Package..... | 728 |
| CNC Lock Function..... | 589 |
| CNC Lock Setting Data Preparation Tool..... | 772 |
| CNC Parameter Setting Tool..... | 735 |
| CNC Screen Display Function (SDF)..... | 751 |
| CNC Screen Display for 19" LCD..... | 602 |
| CNC Screen Dual Display Function..... | 601 |
| CNC Screen Web Server Function..... | 604 |
| CNC Setting Tool..... | 734 |
| CNC Startup Tool..... | 733 |
| CNC Status Notification Function..... | 672 |
| Canned Cycle for Grinding..... | 335 |

| | |
|------------------------------------------------------------------|-----|
| Canned Cycles for Drilling..... | 304 |
| Chamfering / Corner Rounding..... | 292 |
| Changing Active Offset Value with Manual Move..... | 439 |
| Chopping..... | 073 |
| Chopping Function by Flexible Synchronous Control..... | 074 |
| Chopping Setting Screen..... | 075 |
| Chuck and Tail Stock Barrier..... | 113 |
| Circular Thread Cutting..... | 198 |
| Circular Thread Cutting B..... | 199 |
| Clamp Zone Avoidance Function..... | 502 |
| Communication..... | 673 |
| Conical/Spiral Interpolation..... | 190 |
| Constant Surface Speed Control..... | 383 |
| Continuous Dressing..... | 214 |
| Continuous High-Speed Skip..... | 212 |
| Continuous Positional Data Output Function..... | 630 |
| Control Axis Detach..... | 071 |
| Control Function for Link Type Press..... | 085 |
| Controllable Axes Expansion..... | 042 |
| Controlled Axis..... | 023 |
| Coordinate System Rotation..... | 310 |
| Corner Control by Feedrate..... | 546 |
| Cross Rail Axis Control..... | 245 |
| Cs Contour Control..... | 051 |
| Cs Contour Control Speed Command Switching Function..... | 402 |
| Custom Macro..... | 294 |
| Custom Macro Variable Name 31 Characters..... | 297 |
| Custom Software Size..... | 325 |
| Customized Data Expansion..... | 430 |
| Cutting / Rapid Switching Function for Path Table Operation..... | 237 |
| Cutting Condition Setting Function..... | 516 |
| Cutting Point Command..... | 417 |
| Cutting Point Interpolation for Cylindrical Interpolation..... | 426 |
| Cutting Restart..... | 526 |
| Cycle Table Operation Function for Path Table Operation..... | 231 |

| | |
|----------------------------------------------------------|-----|
| Cycle Time Estimate Function..... | 775 |
| Cycle Time Estimate Function for CNC GUIDE..... | 726 |
| Cycle Time Estimate Library Function..... | 358 |
| Cycle Time Estimate for iHMI..... | 357 |
| Cylindrical Interpolation..... | 182 |
| Cylindrical Interpolation by Plane Distance Command..... | 183 |

D

| | |
|----------------------------------------------------------------------------|-----|
| Data Input/Output..... | 616 |
| Data Server Explorer Connection..... | 620 |
| Delay Time Setting Function of Auxiliary Function Output for PTO..... | 232 |
| Designation of Control Paths..... | 039 |
| Designation of Controlled Axes..... | 025 |
| Designation of Machine Control Type..... | 024 |
| Designation of Machine Groups..... | 037 |
| Designation of Servo Axes for Spindle Use..... | 050 |
| Designation of Spindle Axes..... | 047 |
| DeviceNet..... | 697 |
| DeviceNet Adapter (Slave)..... | 700 |
| DeviceNet Scanner (Master)..... | 698 |
| Direct Drawing Dimension Programming..... | 288 |
| Direct Input of Offset Value Measured B..... | 436 |
| Direct Input of Offset Value Measured B for 2-Spindle Lathe..... | 443 |
| Direction Change Movement in Auxiliary Function Output Block Function..... | 170 |
| Direction-Dependent Type of High-Speed Position Switch..... | 128 |
| Dual Check Safety (DCS)..... | 646 |
| Dual Control Axes Switching..... | 072 |
| Dual Feedrate Command..... | 338 |
| Dual Position Feedback..... | 100 |
| Dwell / Auxiliary Function Time Override Function..... | 175 |
| Dynamic Graphic Display Function..... | 593 |
| Dynamic Switching of Diameter/Radius Specification..... | 280 |

E

| | |
|----------------------------|-----|
| Eccentric Turning..... | 246 |
| Edge Cutting Function..... | 518 |

| | |
|----------------------------------------------------------------|-----|
| Editing Operation..... | 549 |
| Editing for Manual Handle Retrace..... | 167 |
| Electronic Cam Function..... | 086 |
| Electronic Cam Support Tool..... | 752 |
| Electronic Gear Box (EGB)..... | 482 |
| Electronic Gear Box (EGB) - 2 pairs..... | 484 |
| Electronic Gear Box (EGB) Automatic Phase Synchronization..... | 485 |
| Embedded Ethernet..... | 674 |
| Embedded Macro..... | 333 |
| Energy Saving Level Selection Function..... | 605 |
| Enlarged CNC Screen Display for 19" LCD..... | 603 |
| Error Compensation Data Protection Function..... | 615 |
| EtherNet/IP..... | 691 |
| EtherNet/IP Adapter..... | 692 |
| EtherNet/IP Adapter Safety Function..... | 694 |
| EtherNet/IP Scanner..... | 695 |
| EtherNet/IP Setting Tool..... | 736 |
| Ethernet Display Function..... | 598 |
| Ethernet Display Sharing Function..... | 599 |
| Execution Macro of Measurement Cycle..... | 345 |
| Expansion of Axis Command in Tool Center Point Control..... | 420 |
| Expansion of Servo Axes Number..... | 044 |
| Exponential Interpolation..... | 180 |
| Extended Bi-Directional Pitch Error Compensation..... | 466 |
| Extended Conversational Macro Function..... | 319 |
| Extended P-Code Variables Size..... | 342 |
| External Data Input..... | 624 |
| External Deceleration..... | 258 |
| External I/O Device Control..... | 626 |
| External Machine Zero Point Shift..... | 622 |
| External Message..... | 623 |
| External Tool Offset..... | 621 |
| External Touch Panel Interface..... | 595 |

F

| | |
|--------------------------------------------------------------------|-----|
| FANUC Auto HMI-NC..... | 574 |
| FANUC Auto HMI-NC Screen Enhancement 1..... | 576 |
| FANUC Auto HMI/T and Auto HMI-NC..... | 760 |
| FANUC Connect..... | 763 |
| FANUC Customize Assist..... | 764 |
| FANUC LADDER-III..... | 730 |
| FANUC PICTURE..... | 729 |
| FANUC PICTURE Executor..... | 328 |
| FANUC PICTURE Function..... | 329 |
| FANUC PICTURE Function for Power Motion i-A..... | 332 |
| FANUC PICTURE Function for Series 35i-B..... | 331 |
| FANUC SERVO GUIDE..... | 742 |
| FL-net..... | 702 |
| FL-net Safety..... | 704 |
| FL-net Setting Tool..... | 737 |
| FOCAS Library..... | 753 |
| Fast Data Server..... | 619 |
| Fast Ethernet..... | 675 |
| Feed Functions..... | 248 |
| Feed Stop..... | 259 |
| Feedrate Change Function..... | 273 |
| Figure Copying..... | 315 |
| Fine Torque Sensing..... | 123 |
| Flexible Path Axis Assignment..... | 061 |
| Flexible Path Spindle Assignment (Spindle Switching Function)..... | 404 |
| Flexible Synchronous Control..... | 488 |
| Floating Reference Position Return..... | 206 |
| Full Closed Kit..... | 667 |
| Functions..... | 022 |
| Functions for Gas Cutting Machine..... | 542 |

G

| | |
|------------------------|-----|
| G-Code System B/C..... | 289 |
| Gap Control..... | 548 |

| | |
|------------------------------------------------------------|-----|
| Gap Control for Laser..... | 523 |
| Gas Cutting Machine Functions..... | 541 |
| Gear Cutting Package..... | 662 |
| General Purpose Retract..... | 225 |
| Gentle Curve Cutting..... | 545 |
| Gentle Normal Direction Control..... | 213 |
| Graphic Function..... | 592 |
| Grinding Functions..... | 495 |
| Grinding Package..... | 661 |
| Groove Cutting Function by Continuous Circle Movement..... | 341 |
| Guidance Table for Machine Alarm Diagnosis..... | 754 |

H

| | |
|-----------------------------------------------------------------------|-----|
| HRV3 Control..... | 102 |
| HRV4 Control..... | 104 |
| Handle Interruption..... | 159 |
| Helical Interpolation..... | 184 |
| Helical Interpolation B..... | 185 |
| Helical Involute Interpolation..... | 188 |
| High Speed Press Function..... | 512 |
| High Speed Serial Bus (HSSB)..... | 711 |
| High-Precision Learning Control A..... | 091 |
| High-Precision Learning Control B..... | 092 |
| High-Precision Learning Control C..... | 093 |
| High-Precision Oscillation Function..... | 076 |
| High-Speed Binary Program Operation..... | 241 |
| High-Speed Binary Program Operation Retract Function..... | 243 |
| High-Speed Binary Program Operation on 2-Path Control..... | 242 |
| High-Speed Cycle Cutting Additional Variables A..... | 219 |
| High-Speed Cycle Cutting Additional Variables B..... | 220 |
| High-Speed Cycle Cutting Additional Variables C..... | 221 |
| High-Speed Cycle Cutting Additional Variables D..... | 222 |
| High-Speed Cycle Cutting Additional Variables E..... | 223 |
| High-Speed Cycle Machining..... | 216 |
| High-Speed Cycle Machining Operation Information Output Function..... | 224 |

| | |
|-----------------------------------------------------------------|-----|
| High-Speed Cycle Machining Retract Function..... | 217 |
| High-Speed Cycle Machining Skip Function..... | 218 |
| High-Speed Feedrate Override..... | 253 |
| High-Speed Measuring Position Reach Signal Input..... | 433 |
| High-Speed Position Switch..... | 127 |
| High-Speed Processing..... | 266 |
| High-Speed Program Check..... | 174 |
| High-Speed Program Management..... | 562 |
| High-Speed Signal Output Function for Path Table Operation..... | 234 |
| High-Speed Skip..... | 204 |
| High-Speed Smooth TCP..... | 419 |
| High-Speed and High-Quality Machining Package..... | 193 |
| Hob Command by Flexible Synchronous Control..... | 493 |
| Hobbing / Electronic Gear Box..... | 481 |
| Hypothetical Axes Interpolation..... | 189 |
| Hypothetical Linear Axis Interpolation..... | 244 |

I

| | |
|---------------------------------------------------------------------|-----|
| In-Acceleration/Deceleration Signal..... | 277 |
| In-Position Check Switching Function for Drilling Canned Cycle..... | 305 |
| Inch/Metric Conversion..... | 105 |
| Inclination Compensation..... | 469 |
| Inclined Rotary Axis Control..... | 067 |
| Increment System C..... | 087 |
| Increment System D..... | 088 |
| Increment System E..... | 089 |
| Incremental Command for Path Table Operation..... | 235 |
| Index Table Indexing..... | 211 |
| Infeed Control..... | 215 |
| Integrated Operation & Programming Guidance Functions..... | 347 |
| Inter-Path Flexible Synchronization Control..... | 491 |
| Inter-Unit Synchronization (Power Motion i-A)..... | 718 |
| Interaction Control..... | 532 |
| Interactive Programming..... | 748 |
| Interface Functions..... | 671 |

| | |
|---------------------------------------------------------|-----|
| Interference Check Function for Automatic Lathe..... | 116 |
| Interference Check for Each Path..... | 114 |
| Interference Check for Rotary Area..... | 115 |
| Interpolated Straightness Compensation 3072 Points..... | 474 |
| Interpolation Functions..... | 178 |
| Interpolation Type Pitch Error Compensation..... | 464 |
| Interpolation Type Straightness Compensation..... | 473 |
| Interruption Type Custom Macro..... | 300 |
| Inverse Time Feed..... | 255 |
| Involutes Interpolation..... | 187 |

J

| | |
|-------------------|-----|
| Jerk Control..... | 268 |
|-------------------|-----|

K

| | |
|---------------------------------|-----|
| Key and Program Encryption..... | 554 |
|---------------------------------|-----|

L

| | |
|----------------------------------------------------------------------|-----|
| LADDER Editing Package..... | 732 |
| Laser Control Function..... | 515 |
| Laser Data Log Output..... | 538 |
| Laser Functions..... | 513 |
| Laser High-Speed Control Function 2..... | 520 |
| Laser Machining Package..... | 539 |
| Laser Oscillator Communication Control (FSSB Connection)..... | 522 |
| Laser Oscillator Communication Control (HSSB Connection)..... | 521 |
| Laser Trend Function..... | 540 |
| Lathe / Machining Center G-Code System Switching Function..... | 291 |
| Learning Control - Memory Expansion..... | 098 |
| Learning Control for Parts Cutting A..... | 094 |
| Learning Control for Parts Cutting B..... | 095 |
| Learning Helical Interpolation..... | 186 |
| Learning Memory Size 10Mbyte..... | 099 |
| Linear Inclination Compensation Function..... | 477 |
| Linear Scale I/F Expansion with Absolute Address Reference Mark..... | 131 |
| Linear Scale Interface with Absolute Address Reference Mark..... | 129 |

| | |
|---------------------------------------------|-----|
| Linear/Circular Punch Command..... | 505 |
| Live Tool Kit..... | 670 |
| Loader Control Function..... | 052 |
| Look-Ahead Blocks Expansion..... | 267 |
| Look-Ahead Blocks Expansion of AICC II..... | 264 |

M

| | |
|-------------------------------------------------------------------|-----|
| M-Code Group Check Function..... | 397 |
| M-Code Protect Function..... | 340 |
| MACRO Compiler..... | 759 |
| MANUAL GUIDE 0i..... | 369 |
| MANUAL GUIDE i Advanced Guidance Function..... | 366 |
| MANUAL GUIDE i Basic Software..... | 359 |
| MANUAL GUIDE i Extended Axis Name Function..... | 367 |
| MANUAL GUIDE i Handle Machining Function..... | 365 |
| MANUAL GUIDE i Multi-Path Support..... | 361 |
| MANUAL GUIDE i Tilted Working Plane (TWP) Machining Function..... | 362 |
| MANUAL GUIDE i Windows Call Function..... | 364 |
| MDI Reset Key Invalidation..... | 613 |
| MT-LINKi - CNC Data Collection Software for PC..... | 767 |
| MTConnect Server..... | 769 |
| MTConnect Server Function..... | 717 |
| Machine Alarm Diagnosis..... | 567 |
| Machine Configuration Selecting Function..... | 608 |
| Machine Operation Menu..... | 572 |
| Machine Operation Menu Making Tool..... | 755 |
| Machine Remote Diagnosis Package..... | 765 |
| Machine Safety Functions..... | 645 |
| Machine Setting Switching Function..... | 614 |
| Machine State Monitoring Function..... | 607 |
| Machining Condition Selecting Function..... | 590 |
| Machining Quality Level Adjustment..... | 591 |
| Machining Simulation with PC Function..... | 120 |
| Machining Status Monitor Package Disk..... | 756 |
| Machining Time Stamp..... | 556 |

| | |
|--------------------------------------------------------------|-----|
| Macro Executor..... | 317 |
| Macro Executor + C-Language Executor..... | 320 |
| Macro for Multi-Axes High-Response Function..... | 301 |
| Main Menu Screen Customization Tool..... | 757 |
| Main Menu Screen Customizing Function..... | 610 |
| Manual 2nd/3rd/4th Reference Position Return..... | 150 |
| Manual Handle Feed - Multiple 10 Million..... | 157 |
| Manual Handle Feed 1 Unit..... | 154 |
| Manual Handle Feed 2/3 Units..... | 155 |
| Manual Handle Feed 4/5 Units..... | 156 |
| Manual Handle Interface for BETA i Series with I/O-Link..... | 161 |
| Manual Handle Retrace..... | 166 |
| Manual Handle Retrace for Multi-Path..... | 168 |
| Manual Interruption of 3-D Coordinate System Conversion..... | 160 |
| Manual Intervention and Return..... | 147 |
| Manual Linear/Circular Interpolation..... | 171 |
| Manual Numerical Command..... | 163 |
| Maximum Look-Ahead Blocks 400..... | 265 |
| Memory Card Program Entry Count Extension..... | 558 |
| Middle-Level Task for C-Language Executor..... | 324 |
| Milling Package..... | 659 |
| Milling Standard Package..... | 657 |
| Minimum Command 1% Duty Override..... | 519 |
| Mirror Image for Double Turret..... | 306 |
| Modbus/TCP Server..... | 715 |
| Multi-Axes High-Response Function..... | 080 |
| Multi-Axes Synchronous Function (Power Motion i-A)..... | 079 |
| Multi-Language Display..... | 578 |
| Multi-Path Editing Function..... | 561 |
| Multi-Path Kit..... | 663 |
| Multi-Path PMC Function..... | 635 |
| Multi-Path Program Management Function..... | 563 |
| Multi-Piece Machining..... | 507 |
| Multi-Piece Machining..... | 527 |
| Multi-Piece Machining End Area Command..... | 508 |

| | |
|---------------------------------------------|-----|
| Multi-Piece Machining End Area Command..... | 528 |
| Multi-Repetitive Cycles..... | 302 |
| Multi-Repetitive Cycles II..... | 303 |
| Multi-Spindle Control..... | 391 |
| Multi-Step Skip..... | 202 |
| Multiple Tool Control..... | 510 |

N

| | |
|-------------------------------------------------------|-----|
| NC Program Conversion Function..... | 177 |
| NURBS Interpolation..... | 208 |
| Nano Smoothing..... | 192 |
| Nonvolatile PMC Data Table Area Expansion (40kB)..... | 643 |
| Nonvolatile PMC Extra Relay Function..... | 642 |
| Normal Direction Control..... | 207 |
| Number of Custom Macro Variable Name 1000..... | 298 |
| Number of Custom Macro Variable Name 4000..... | 299 |
| Number of Registerable Programs Expansion..... | 552 |
| Nutating Rotary Head Tool Length Compensation..... | 447 |

O

| | |
|-----------------------------------------------------------------|-----|
| OPC Server..... | 768 |
| OT Area Access Avoidance Function..... | 112 |
| One Touch Macro Call..... | 627 |
| One-Digit F-Code Feed..... | 254 |
| Operation..... | 138 |
| Operation History Converter Tool..... | 758 |
| Optimum Torque Acceleration/Deceleration..... | 249 |
| Optimum Torque Acceleration/Deceleration for Rigid Tapping..... | 270 |
| Option Packages and Kits..... | 652 |
| Optional Block Skip..... | 279 |
| Optional Chamfering / Corner Rounding..... | 293 |

P

| | |
|----------------------------------------------------------------------|-----|
| PC Software..... | 721 |
| PC Tool for Memory Card Program Operation/Editing..... | 774 |
| PMC Axis Control - Acceleration/Deceleration Specification Feed..... | 077 |

| | |
|---------------------------------------------------------------|-----|
| PMC Function Block Function..... | 644 |
| PMC Ladder Function..... | 632 |
| PMC Symbol, Comment and Message Capacity Expansion..... | 637 |
| PMC System..... | 631 |
| PROFIBUS Setting Tool..... | 738 |
| PROFIBUS-DP..... | 686 |
| PROFIBUS-DP Master..... | 689 |
| PROFIBUS-DP Slave..... | 687 |
| PROFINET Configuration Tool..... | 739 |
| PROFINET IO..... | 677 |
| PROFINET IO Controller..... | 678 |
| PROFINET IO Controller 2..... | 680 |
| PROFINET IO Controller Safety Function..... | 682 |
| PROFINET IO Device..... | 683 |
| PROFINET IO Device Safety Function..... | 685 |
| Parallel Axis Control..... | 064 |
| Parameter Conversion Support Tool..... | 770 |
| Part Program Storage Size..... | 550 |
| Path Table Direct Conversion Function..... | 233 |
| Path Table Operation (PTO)..... | 226 |
| Path Table Operation Execution Data Size 20Mbyte..... | 239 |
| Path Table Operation Execution Format Data Capacity 60MB..... | 247 |
| Path Table Operation History Function..... | 240 |
| Pattern Data Input..... | 339 |
| Periodical Secondary Pitch Error Compensation..... | 467 |
| Peripheral Axis Control..... | 054 |
| Personal Authentication Function..... | 588 |
| Pivot Axis Control..... | 068 |
| Plane Conversion Function..... | 281 |
| Playback..... | 555 |
| Polar Coordinate Command..... | 282 |
| Polar Coordinate Interpolation..... | 181 |
| Pole Position Detection Function..... | 070 |
| Polygon Machining with Two Spindles..... | 201 |
| Polygon Turning..... | 200 |

| | |
|-------------------------------------------------------------|-----|
| Polygon Turning Function for Path Table Operation..... | 228 |
| Position Control Keep Function..... | 084 |
| Position Definition Type Synchronous Function..... | 082 |
| Position Feedback Dynamic Switching Function..... | 101 |
| Position Switch..... | 126 |
| Positioning by Optimum Acceleration..... | 250 |
| Positioning in Machine Coordinate System with Feedrate..... | 287 |
| Power Mate CNC Manager..... | 625 |
| Pressure and Position Control Function..... | 083 |
| Program Auto Restart..... | 525 |
| Program Auto Restart..... | 504 |
| Program Input..... | 278 |
| Program Operation on Large Capacity Memory..... | 564 |
| Program Restart..... | 140 |
| Program Transfer Tool..... | 746 |
| Programmable Mirror Image..... | 314 |
| Programmable Rapid Traverse Overlap..... | 272 |
| Protection of Data at Eight Levels..... | 587 |
| Proximity Point Search..... | 535 |
| Pulse Superimposed Function..... | 176 |
| Punch Press Function for Compound Cutting..... | 530 |
| Punch Press Functions..... | 496 |
| Punch Tapping Function..... | 346 |

Q

| | |
|----------------------------|-----|
| QSSR CONNECT..... | 710 |
| QSSR G-CODE..... | 719 |
| Quick Program Restart..... | 142 |

R

| | |
|------------------------------------------------------|-----|
| RAM-Axis Control..... | 503 |
| RS232C Interface..... | 617 |
| RS232C Interface Expansion of Receiving Buffer..... | 618 |
| Rate Feed..... | 256 |
| Real Time Custom Macro..... | 336 |
| Reference Point Setting with Mechanical Stopper..... | 151 |

| | |
|--------------------------------------------------------------------------------------------|-----|
| Reference Point Setting with Mechanical Stopper by Grid Method..... | 153 |
| Reference Point Setting with Mechanical Stopper for Feed Axis Synchronization Control..... | 152 |
| Reference Position Signal Output..... | 164 |
| Restart Point Keeping of Quick Program Restart..... | 144 |
| Retrace..... | 165 |
| Retraction for 3-Dimensional Rigid Tapping..... | 149 |
| Retraction for Rigid Tapping..... | 148 |
| Reverse Motion Function for Restart..... | 172 |
| Rigid Tapping..... | 394 |
| Rigid Tapping Bell-Shaped Acceleration/Deceleration..... | 269 |
| Rigid Tapping by Manual Handle..... | 395 |
| Robot Connection Function..... | 713 |
| Rotary Axis Control..... | 125 |
| Rotary Table Dynamic Fixture Offset..... | 437 |
| Rotary Table Kit..... | 669 |
| Run Hour and Parts Count Display..... | 566 |

S

| | |
|--------------------------------------------------|-----|
| SERVO SIZER..... | 745 |
| SERVO Viewer..... | 744 |
| Safety I/O Signal History Function..... | 648 |
| Safety Spindle Speed Limit Override..... | 649 |
| Safety Zone Area Expansion..... | 501 |
| Safety Zone Check..... | 500 |
| Scaling..... | 309 |
| Selection of Five Optional Languages..... | 586 |
| Sequence Number Comparison and Stop..... | 139 |
| Serial/Analog Spindle Control..... | 392 |
| Servo Learning Oscillation..... | 136 |
| Servo-On Synchronize Function..... | 078 |
| Servo/Spindle Synchronous Control..... | 403 |
| Servo/Spindle Waveform Data Output Function..... | 569 |
| Set-Up Guidance Function..... | 344 |
| Setting and Display..... | 565 |
| Simple Spindle Synchronous Control..... | 390 |

| | |
|-----------------------------------------------------------------------------------------------|-----|
| Simultaneously Controlled Axes Expansion..... | 045 |
| Single Direction Positioning..... | 179 |
| Skip Function for Electronic Gear Box (EGB) Axis..... | 483 |
| Skip Function for Flexible Synchronization Control..... | 492 |
| Skip Function for Multi-Axes High-Response Function..... | 081 |
| Small Hole Peck Drilling Cycle..... | 334 |
| Smart Spindle-Load Control..... | 275 |
| Smooth Interpolation..... | 191 |
| Smooth TCP..... | 418 |
| Smooth Tolerance Control..... | 194 |
| Software FA..... | 720 |
| Software Operator's Panel..... | 570 |
| Software Operator's Panel General Purpose Switch..... | 571 |
| Spatial Corner Rounding..... | 536 |
| Speed Control with Acceleration in Circular Interpolation..... | 260 |
| Spindle Analog Output..... | 382 |
| Spindle Axes Expansion..... | 043 |
| Spindle Control Switching Function for High-Speed Machining..... | 405 |
| Spindle Control with Cs Contour Control..... | 401 |
| Spindle Control with Servo Motor..... | 399 |
| Spindle Electronic Gear Box (EGB)..... | 486 |
| Spindle Learning Control..... | 096 |
| Spindle Learning Control in High-Precision Learning Control A/B..... | 097 |
| Spindle Orientation..... | 385 |
| Spindle Orientation Expansion (Extended Spindle Orientation)..... | 386 |
| Spindle Output Switching Function..... | 387 |
| Spindle Output Switching Function Expansion (Extended Spindle Output Switching Function)..... | 388 |
| Spindle Positioning..... | 393 |
| Spindle Serial Output..... | 381 |
| Spindle Speed Fluctuation Detection..... | 398 |
| Spindle Speed Fluctuation Detection for Path Table Operation..... | 227 |
| Spindle Synchronous Control..... | 389 |
| Spindle Synchronous Control for Guide Bush..... | 137 |
| Spindle Unit Compensation..... | 446 |
| Standard Laser Functions..... | 514 |

| | |
|-------------------------------------------------------------------------|-----|
| Step Sequence Function..... | 639 |
| Stored Limit Check Before Move..... | 109 |
| Stored Pitch Error Compensation..... | 463 |
| Stored Stroke Check 1 Area Expansion..... | 106 |
| Stored Stroke Check 2,3..... | 108 |
| Stored Stroke Limit Range Switching Function by Signal..... | 111 |
| Straightness Compensation..... | 471 |
| Stroke Limit Area Changing Function..... | 110 |
| Stroke Limit External Setting..... | 107 |
| Sub-Table Call for Path Table Operation..... | 236 |
| Superimposed Control..... | 056 |
| Superimposed Control A..... | 057 |
| Superimposed Control for High-Speed Cycle Machining..... | 058 |
| Synchronous and Composite Control..... | 055 |
| Synchronous, Composite and Superimposed Control by Program Command..... | 059 |

T

| | |
|-----------------------------------------------------------------------|-----|
| T- and C-Axes Simultaneous Control..... | 499 |
| TURN MATE i Basic Software..... | 371 |
| TURN MATE i Expanded Function..... | 373 |
| TURN MATE i Expansion of Machining Cycles..... | 376 |
| TURN MATE i MDI Key Operation Function..... | 374 |
| TURN MATE i NC Program Conversion Function..... | 375 |
| TWP Kit..... | 664 |
| Tandem Disturbance Elimination Control..... | 069 |
| Tandem Kit..... | 668 |
| Tape Format for Series 15 CNC..... | 316 |
| Template Program Function..... | 559 |
| Temporary Absolute Coordinate Setting..... | 132 |
| Test Mode Function for Dual Check Safety Acceptance Test..... | 650 |
| Thermal Growth Compensation Along Tool Vector..... | 476 |
| Thread Cutting Retract..... | 196 |
| Thread Cutting, Synchronous Cutting..... | 195 |
| Thread Start Position Compensation for Changing Spindle Speed..... | 406 |
| Threading Start Position Shift Function for Path Table Operation..... | 229 |

| | |
|----------------------------------------------------------------------------------|-----|
| Tilted Working Plane (TWP)..... | 312 |
| Time Constant of Acc./Dec. After Interpolation Switching Function by Signal..... | 274 |
| Tool Attachment/Detachment Management Function..... | 458 |
| Tool Center Point Control..... | 415 |
| Tool Data Setting Function..... | 509 |
| Tool Functions / Tool Compensation..... | 408 |
| Tool Geometry Size Data..... | 452 |
| Tool Geometry Size Data - Additional Tool Type..... | 454 |
| Tool Geometry/Wear Compensation..... | 428 |
| Tool Length / Work Zero Point Measurement..... | 434 |
| Tool Length Compensation in Tool Axis Direction..... | 440 |
| Tool Life Management..... | 511 |
| Tool Life Management..... | 444 |
| Tool Management Expansion..... | 459 |
| Tool Management Expansion B..... | 460 |
| Tool Management Function..... | 455 |
| Tool Management Function for Multi-Edge Tools..... | 461 |
| Tool Offset..... | 414 |
| Tool Offset B..... | 547 |
| Tool Offset Conversion Function..... | 451 |
| Tool Offset Function for Path Table Operation..... | 230 |
| Tool Offset Memory B..... | 412 |
| Tool Offset Memory C..... | 413 |
| Tool Offset Pairs..... | 409 |
| Tool Offset for Milling and Turning Function..... | 449 |
| Tool Pairs for Tool Management Function..... | 456 |
| Tool Posture Control..... | 416 |
| Tool Radius / Tool Nose Radius Compensation..... | 423 |
| Tool Retract and Recover..... | 145 |
| Torch Swing for Gas Cutting Machine..... | 544 |
| Touch Panel Control..... | 594 |
| Turning Package 1..... | 655 |
| Turning Package 2..... | 656 |
| Twin Display Function with Ethernet..... | 600 |
| Twin Table Control..... | 063 |

| | |
|-----------------------------------------------------------------------|-----|
| Two Laser Control Function..... | 537 |
| Two Touch Panels Control for Stand-Alone Type CNC..... | 596 |
| U | |
| U-Axis Control 2 Pairs..... | 494 |
| Unexpected Disturbance Torque Detection Function..... | 121 |
| Unexpected Disturbance Torque Detection for BETA i I/O Link..... | 122 |
| V | |
| Variable Lead Thread Cutting..... | 197 |
| Virtual MDI Key..... | 597 |
| W | |
| W-Axis Gap Control..... | 533 |
| Waiting Function by Specifying Start Point..... | 380 |
| Warning Function Against Modification of Setting..... | 612 |
| Wheel Wear Compensation..... | 438 |
| Windows Embedded SDK..... | 773 |
| Workpiece Coordinate System..... | 283 |
| Workpiece Coordinate System Preset..... | 284 |
| Workpiece Setting Error Compensation..... | 442 |
| Y | |
| Y-Axis Crack Cancel..... | 506 |
| Y-Axis Offset..... | 421 |
| i | |
| iCAP T (former "iHMI Interactive Programming for Complex Lathe")..... | 355 |
| iCAP T for PC..... | 749 |
| iHMI..... | 722 |
| iHMI Application SDK for PANEL iH..... | 723 |
| iHMI Basic Function..... | 348 |
| iHMI Driver for IPC..... | 354 |
| iHMI Kit..... | 666 |
| iHMI Machining Cycle..... | 350 |
| iHMI Machining Simulation Extension..... | 352 |

One common servo and control platform – Infinite opportunities **THAT'S FANUC!**



FA

CNCs,
Servo Motors
and Lasers

ROBOTS

Industrial Robots,
Accessories
and Software

ROBOCUT

CNC Wire-Cut
Electric Discharge
Machines

ROBODRILL

Compact
CNC Machining
Centres

ROBOSHOT

Electric CNC
Injection Moulding
Machines

ROBONANO

Ultra Precision
Machines

IoT

Industry 4.0
solutions



WWW.FANUC.EU